

BASES

1/2.2 RADIOACTIVE EFFLUENTS

1/2.2.1 LIQUID EFFLUENTS

1/2.2.1.1 CONCENTRATION

This requirement is provided to ensure that the concentration of radioactive materials released at any time in liquid waste effluents from the site to UNRESTRICTED AREAS will be less than or equal to ten times the concentration levels specified in 10 CFR Part 20, Appendix B, Table 2, Column 2.

This limitation provides additional assurance that the levels of radioactive materials in bodies of water outside the site will result in exposures within (1) the Section II.A limits of Appendix I to 10 CFR Part 50, and (2) the limits of 10 CFR Part 20.1301 (a)(1) to a member of the public. The concentration limit for noble gases is based upon the assumption that Xe-135 is the controlling radioisotope and its Maximum Permissible Concentration in air (submersion) was converted to an equivalent concentration in water using the methods described in International Commission of Radiological Protection (ICRP) Publication 2.

1/2.2.1.2 DOSE

This requirement is provided to implement the dose requirements of Section II.A, III.A, and IV.A of Appendix I, 10 CFR Part 50. The requirement implements the guides set forth in Section II.A of Appendix I. Compliance with this control will be considered to demonstrate compliance with the 0.1 rem limit of 10 CFR Part 20.1301 (a)(1) per 56FR23374.

This action provides the required operating flexibility and at the same time implements the guides set forth in Section IV.A of Appendix I to assure that the releases of radioactive material in liquid effluents will be kept "as low as is reasonable achievable". Also, for fresh water sites with drinking water supplies which can potentially be affected by plant operations, there is reasonable assurance that the operation of the facility will not result in radionuclide concentrations in the finished drinking water that are in excess of the requirements of 40 CFR 141. The dose calculations in Section 6.0 implement the requirements in Section III.A of Appendix I that conformance with the guides of Appendix I be shown by calculational procedures based on models and data such that the actual exposure of an individual through appropriate pathways is unlikely to be substantially underestimated. The equations specified in Section 6.0 for calculating the doses due to the actual release rates of radioactive materials in liquid effluents will be consistent with the methodology provided in Regulatory Guide 1.109, "Calculation of Annual Doses to Man from Routine Releases of Reactor Effluents for the Purpose of Implementing Appendix I," October 1977 and Regulatory Guide 1.113, "Estimating Aquatic Dispersion of Effluents from Accidental and Routine Reactor Releases for the Purpose of Implementing Appendix I" April 1977. NUREG-0133 provides methods for dose calculations consistent with Regulatory Guides 1.109 and 1.113.

BASES

1/2.2 RADIOACTIVE EFFLUENTS

1/2.2.1 LIQUID EFFLUENTS

1/2.2.1.3 LIQUID WASTE TREATMENT

This section requires that the appropriate portions of the liquid radwaste treatment system be used when specified. This provides assurance that the releases of radioactive materials in liquid effluents will be kept "as low as is reasonably achievable." This requirement implements the requirements of 10 CFR Part 50.36a, General Design Criterion 60 of Appendix A to 10 CFR Part 50 and design objective Section II.D of Appendix I to 10 CFR 50. The specified limits governing the use of appropriate portions of the liquid radwaste treatment system were specified as a suitable fraction of the guide set forth in Section II.A of Appendix I, 10 CFR 50, for liquid effluents.

This section also requires submittal of a special report if the limiting values are exceeded and unexpected failures of non-redundant radwaste processing equipment halt waste treatment.

1/2.2.2 GASEOUS EFFLUENTS

1/2.2.2.1 DOSE RATE

This requirement is provided to ensure that the external dose rate at anytime at the SITE BOUNDARY from gaseous effluents from all units on the site will be within the limits of 10 CFR Part 20.1301 (a)(2) for UNRESTRICTED AREAS. The 500 mrem/yr dose rate will ensure that the instantaneous dose rate is well below 2 mrem/hr. These limits provide reasonable assurance that radioactive material discharged in gaseous effluents will not result in the exposure of a MEMBER OF THE PUBLIC in an UNRESTRICTED AREA, to annual average concentrations exceeding the limits specified in Appendix B, Table 2 of 10 CFR Part 20. For MEMBERS OF THE PUBLIC who may at times be within the SITE BOUNDARY, the occupancy of the MEMBER OF THE PUBLIC will be sufficiently low to compensate for any increase in the atmospheric diffusion factor above that for the SITE BOUNDARY.

The specified release rate limits restrict, at all times, the corresponding gamma and beta dose rates to an individual at or beyond the SITE BOUNDARY to ≤ 500 mrem/year to the total body or ≤ 3000 mrem/year to the skin. These release rates also restrict, at all times, the corresponding thyroid dose rate above background to an infant via the cow-milk-infant pathway to ≤ 1500 mrem/year for the nearest cow to the plant.

The action for this requirement requires that appropriate corrective action(s) be taken to reduce gaseous effluent releases if the limits are exceeded.

BASES

1/2.2 RADIOACTIVE EFFLUENTS

1/2.2.2 GASEOUS EFFLUENTS

1/2.2.2.2 DOSE - NOBLE GASES

This requirement is provided to implement the requirements of Section II.B, III.A, and IV.A of Appendix I, 10 CFR Part 50. The limits are the guides set forth in Section II.C of Appendix I. Compliance with this control will be considered to demonstrate compliance with the 0.1 rem limit of 10 CFR 20.1301 (a)(1) per 56FR23374.

The action to be taken for exceeding these limits provides the required operating flexibility and at the same time implements the guides set forth in Section IV.A of Appendix I to assure that the releases of radioactive material in gaseous effluents will be kept "as low as reasonably achievable." Section 7.0 calculational methods implement the requirements in Section III.A of Appendix I that conformance with the guides of Appendix I be shown by calculational procedures based on models and data such that the actual exposure of an individual through appropriate pathways is unlikely to be substantially underestimated. Section 7.0 calculational methods for calculating the doses due to the actual release rates of the subject materials are consistent with the methodologies provided in NUREG/CR-1004, "A Statistical Analysis of Selected Parameters for Predicting Food Chain Transport and Internal Dose of Radionuclides." October 1979 and Regulatory Guide 1.109, "Calculation of Annual Doses to Man from Routine Releases of Reactor Effluents for the Purposes of Evaluating Compliance with 10 CFR Part 50, "Appendix I," Revision 1, October 1977 and Regulatory Guide 1.111, "Methods for Estimating Atmospheric Transport and Dispersion of Gaseous Effluents in Routine Releases from Light-Water Cooled Reactors," Revision 1, July 1977. These ODCM equations also provide for determining the air doses at the exclusion area boundary are based upon the historical average atmospheric conditions. NUREG-0133 provides methods for dose calculations consistent with Regulatory Guides 1.109 and 1.111.

If these limits are exceeded, this section requires that a special report be prepared and submitted to explain violations of the limiting doses contained in the section above.

BASES

1/2.2 RADIOACTIVE EFFLUENTS

1/2.2.2 GASEOUS EFFLUENTS

1/2.2.2.3 DOSE - I-131, I-133, TRITIUM AND RADIONUCLIDES IN
PARTICULATE FORM WITH HALF-LIVES GREATER THAN EIGHT DAYS

This requirement is provided to implement the requirements of Section II.C, III.A, and IV of Appendix I, 10 CFR Part 50. The limits are the guides set forth in Section II.C of Appendix I. Compliance with this control will be considered to demonstrate compliance with the 0.1 rem limit of 10 CFR 20.1301 (a) (1) per 56FR23374.

The action to be taken for exceeding these limits provides the required operating flexibility and at the same time implements the guides set forth in Section IV.A of Appendix I to assure that the releases of radioactive material in gaseous effluents will be kept "as low as reasonably achievable." Section 7.0 calculational methods implement the requirements in Section III.A of Appendix I that conformance with the guides of Appendix I be shown by calculational procedures based on models and data such that the actual exposure of an individual through appropriate pathways is unlikely to be substantially underestimated. Section 7.0 calculational methods for calculating the doses due to the actual release rates of the subject materials are consistent with the methodologies provided in NUREG/CR-1004, "A Statistical Analysis of Selected Parameters for Predicting Food Chain Transport and Internal Dose of Radionuclides," October 1979 and Regulatory Guide 1.109, "Calculation of Annual Doses to Man from Routine Releases of Reactor Effluents for the Purposes of Evaluating Compliance with 10 CFR Part 50, Appendix I," Revision 1, October 1977 and Regulatory Guide 1.111, "Methods for Estimating Atmospheric Transport and Dispersion of Gaseous Effluents in Routine Releases from Light-Water Cooled Reactors," Revision 1, July 1977. These equations also provide for determining the actual doses based upon the historical average atmospheric conditions. The release rate specifications for iodines, radioactive material in particulate form and radionuclides other than noble gases are dependent on the existing radionuclide pathways to man in the UNRESTRICTED AREA. The pathways which were examined in the development of these calculations were: 1) individual inhalation of airborne radionuclides, 2) deposition of radionuclides onto green leafy vegetation with subsequent consumption by man, 3) deposition onto grassy areas where milk animals and meat producing animals graze with consumption of the milk and meat by man, and 4) deposition on the ground with subsequent exposure of man.

If these limits are exceeded, this section requires that a special report be prepared and submitted to explain violations of the limiting doses contained in the section above.

BASES

1/2.2 RADIOACTIVE EFFLUENTS

1/2.2.2 GASEOUS EFFLUENTS

1/2.2.2.4 GASEOUS RADWASTE TREATMENT

This requires that the offgas charcoal adsorber beds be used when specified to treat gaseous effluents prior their release to the environment. This provides reasonable assurance that the release of radioactive materials in gaseous effluents will be kept "as low as is reasonable achievable". This requirement implements the requirements of 10 CFR Part 50.36a, General Design Criterion 60 of Appendix A to 10 CFR Part 50, and design objective Section II.D of Appendix I to 10 CFR Part 50. The specified limits governing the use of appropriate portions of the systems were specified as a suitable fraction of the guide set forth in Sections II.B and II.C of Appendix I, 10 CFR Part 50, for gaseous effluents.

This action requires that a special report be prepared and submitted to explain reasons for any failure to comply with the above requirements.

1/2.2.3 TOTAL DOSE

This requirement is provided to meet the dose limitations of 40 CFR 190. Compliance with this control will be considered to demonstrate compliance with the 0.1 rem limit of 10 CFR 20.1301 (a)(1) per 56FR23374. This requirement requires the preparation and submittal of a Special Report whenever the calculated doses from plant radioactive effluents exceed twice the design objective doses of Appendix I. For sites containing up to four reactors, it is highly unlikely that the resultant dose to a MEMBER OF THE PUBLIC will exceed the dose limits of 40 CFR 190 if the individual reactors remain within the reporting requirement level. The Special Report will describe a course of action which should result in the limitation of dose to a MEMBER OF THE PUBLIC for the calendar year to be within 40 CFR 190 limits. For the purposes of the Special Report, it may be assumed that the dose commitment to the MEMBER OF THE PUBLIC from other fuel cycle sources is negligible, with the exception that dose contributions from other nuclear fuel cycle facilities within a radius of five miles must be considered.

1/2.3 RADIOLOGICAL ENVIRONMENTAL MONITORING

1/2.3.1 MONITORING PROGRAM

The REMP required by this section provides measurements of radiation and radioactive materials in those exposure pathways and for those radionuclides, which lead to the highest potential radiation exposures of individuals resulting from the station operation. This monitoring program thereby supplements the

BASES

1/2.3 RADIOLOGICAL ENVIRONMENTAL MONITORING

1/2.3.1 MONITORING PROGRAM (continued)

radiological effluent monitoring program by verifying that the measurable concentration of radioactive materials and levels of radiation are not higher than expected on the basis of the effluent measurements and modeling of the environmental exposure pathways. The REMP satisfies the requirements of 10 CFR 50, Appendix A, Criteria 64 and 10 CFR 50, Appendix I, Section IV.B.2.

1/2.3.2 LAND USE CENSUS

This requirement is provided to ensure that changes in the use of UNRESTRICTED AREAS are identified and that modifications to the monitoring program are made if required by the results of this census. The best survey information from the door-to-door, mail, telephone, aerial or consulting with local authorities shall be used. This census satisfies the requirements of Section IV.B.3 of Appendix I to 10 CFR Part 50. Restricting the census to gardens of greater than 500 square feet provides assurance that significant exposure pathways via the leafy vegetables will be identified and monitored since a garden of this size is the minimum required to produce the quantity (26 kg/year) of leafy vegetation assumed in Regulatory Guide 1.109 for consumption by a child. To determine this minimum garden size, the following assumptions were used: 1) that 20% of the garden was used for growing broad leaf vegetation (i.e., similar to lettuce and cabbage), and 2) a vegetation yield of 2 kg/square meter.

1/2.3.3 INTERLABORATORY COMPARISON PROGRAM

The requirement for participation in an Interlaboratory Comparison Program is provided to ensure that independent checks on the precision and accuracy of the measurements of radioactive materials in environmental sample matrices are performed as part of the quality assurance program for environmental monitoring in order to demonstrate that the results are reasonably valid.

SECTION 3.0

DEFINITIONS

3.0 DEFINITIONS

The defined terms in this section appear in capitalized type in the text and are applicable throughout these controls.

3.0.A. CHANNEL CALIBRATION

A CHANNEL CALIBRATION shall be the adjustment, as necessary, of the channel output such that it responds with the necessary range and accuracy to known values of the parameter which the channel monitors. The CHANNEL CALIBRATION shall encompass the entire channel including alarm and/or trip functions, and shall include the CHANNEL FUNCTIONAL TEST. The CHANNEL CALIBRATION may be performed by any series of sequential, overlapping, or total channel steps such that the entire channel is calibrated. Non-calibratable components shall be excluded from this requirement, but will be included in CHANNEL FUNCTIONAL TEST and SOURCE CHECK.

3.0.B. CHANNEL FUNCTIONAL TEST

A CHANNEL FUNCTIONAL TEST shall be:

- a. Analog channels - the injection of a simulated signal into the channel as close to the sensor as practicable to verify OPERABILITY including alarm and/or trip functions.
- b. Bistable channel - the injection of a simulated signal into the sensor to verify OPERABILITY including alarm and/or trip function.

3.0.C. GASEOUS WASTE TREATMENT SYSTEM

The GASEOUS WASTE TREATMENT SYSTEM consists of the charcoal adsorber vessels installed in the discharge of the steam jet air ejector (SJAE) to provide delay to a unit's offgas activity prior to release.

3.0.D. DOSE EQUIVALENT I-131

DOSE EQUIVALENT I-131 shall be that concentration of I-131 ($\mu\text{Ci/g}$) which alone would produce the same thyroid dose as the quantity and isotopic mixture of I-131, I-132, I-133, I-134, and I-135 actually present. The thyroid dose conversion factors used for this calculation shall be those listed in Table III of TID-14844, "Calculation of Distance Factors for Power and Test Reactor Sites."

3.0.E. MEMBER(S) OF THE PUBLIC

MEMBER(S) OF THE PUBLIC as defined in 10 CFR 20, is any individual except when that individual is receiving an occupational dose.

DEFINITIONS

3.0.F. OPERABLE - OPERABILITY

A system, subsystem, train, component, or device shall be OPERABLE or have OPERABILITY when it is capable of performing its specified function(s). Implicit in this definition shall be the assumption that all necessary attendant instrumentation, controls, normal and emergency electrical power sources, cooling or seal water, lubrication or other auxiliary equipment that are required for the system, subsystem, train, component, or device to perform its function(s) are also capable of performing their related support function(s).

3.0.G. PURGE - PURGING

PURGE or PURGING is the controlled process of discharging air or gas from the primary containment to maintain temperature, pressure, humidity, concentration or other operating condition, in such a manner that replacement air or gas is required to purify the containment.

3.0.H. RATED POWER

RATED POWER refers to operation at a reactor power of 3,293 MWt (for a licensed thermal power of 3,293 MWt) or 3,458 MWt (for a licensed thermal power of 3,458 MWt); this is also termed 100 percent power and is the maximum power level authorized by the operating license. Rated steam flow, rated coolant flow, rated neutron flux, and rated nuclear system pressure refer to the values of these parameters when the reactor is at rated power. Design power, the power to which the safety analysis (for a licensed thermal power of 3,293 MWt) applies, corresponds to 3,440 MWt.

3.0.I. SITE BOUNDARY

The SITE BOUNDARY as defined in 10 CFR 20, shall be that line beyond which the land or property is not owned, leased, or otherwise controlled by TVA (see Figure 3.1).

3.0.J. SOURCE CHECK

A SOURCE CHECK shall be the qualitative assessment of channel response when the channel sensor is exposed to a radioactive source or multiple of sources.

DEFINITIONS

3.0.K. UNRESTRICTED AREA

An UNRESTRICTED AREA shall be any area, at or beyond the SITE BOUNDARY to which access is not controlled by the licensee for purposes of protection of individuals from exposure to radiation and radioactive materials or any area within the SITE BOUNDARY used for residential quarters or industrial, commercial, institutional, and/or recreational purposes (see Figure 3.1).

3.0.L. VENTING

VENTING is the controlled process of discharging air or gas from primary containment to maintain temperature, pressure, humidity, concentration, or other operating condition, in such a manner that replacement air or gas is not provided or required. Vent, used in system names, does not imply a VENTING process.

3.0.M. CONTROLLED AREA

A CONTROLLED AREA, as defined in 10 CFR 20, is the area outside the RESTRICTED AREA, but inside the SITE BOUNDARY, access to which can be limited by TVA for any reason, (See Figure 3.1).

3.0.N. RESTRICTED AREA

The RESTRICTED AREA, as defined in 10 CFR Part 20, is that area, access to which is limited by the licensee for purpose of protecting individuals against undue risks from exposure to radiation and radioactive materials. The permanent RESTRICTED AREA is shown on Figure 3.1, but temporary restricted areas outside the permanent RESTRICTED AREA may be defined by BFN Site.

3.0.P. MODE

A MODE shall correspond to any one inclusive combination of mode switch position, average reactor coolant temperature, and reactor vessel head closure bolt tensioning specified in Table 3.2 with fuel in the reactor vessel.

Table 3.1

FREQUENCY NOTATION

<u>Notation</u>	<u>Frequency</u>
S	At least once per 12 hours.
D	At least once per 24 hours.
W	At least once per 7 days.
M	At least once per 31 days.
Q	At least once per 92 days.
SA	At least once per 184 days.
18M	At least once per 18 months.
N.A.	Not Applicable
P	Completed prior to each release

Table 3.2

MODES


MODE	TITLE	REACTOR MODE SWITCH POSITION	AVERAGE REACTOR COOLANT TEMPERATURE (°F)
1	Power Operation	Run	NA
2	Startup	Refuel ^(a) or Startup/Hot Standby	NA
3	Hot Shutdown ^(a)	Shutdown	>212
4	Cold Shutdown ^(a)	Shutdown	≤212
5	Refueling ^(b)	Shutdown or Refuel	NA

(a) All reactor vessel head closure bolts fully tensioned.

(b) One or more reactor vessel head closure bolts less than fully tensioned.

Figure 3.1

LAND SITE BOUNDARY

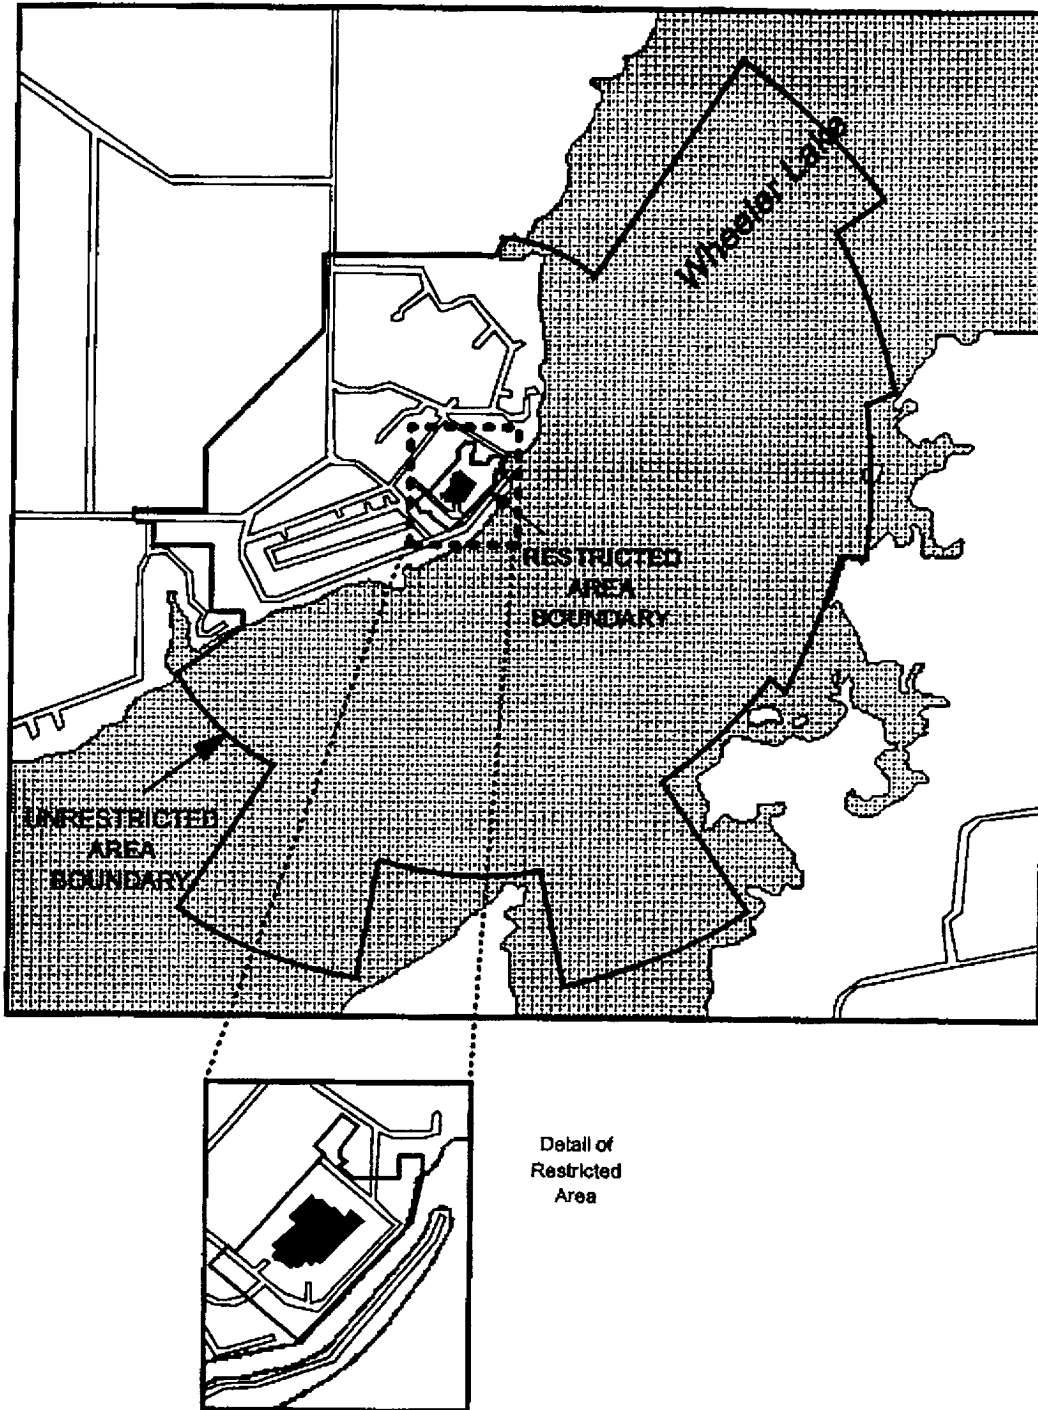

SECTION 4.0

(NOT USED)

SECTION 5.0

ADMINISTRATIVE CONTROLS

5.0 ADMINISTRATIVE CONTROLS

5.1 ANNUAL RADIOLOGICAL ENVIRONMENTAL OPERATING REPORT

The Annual Radiological Environmental Operating Report shall include summaries, interpretations, and an analysis of trends of the results of the radiological environmental surveillance activities for the report period, including a comparison with pre-operational studies, operational controls (as appropriate), and previous environmental surveillance reports and an assessment of the observed impacts of the plant operation on the environment. The report shall also include the results of land use censuses required by Control 1.3.2. If harmful effects or evidence of irreversible damage are detected by the monitoring, the report shall provide an analysis of the problems and a planned course of action to alleviate the problem.

The Annual Radiological Environmental Operating Report shall include summarized and tabulated results in the format of Regulatory Guide 4.8, December 1975 of all radiological environmental samples taken during the report period. In the event that some results are not available for inclusion with the report, the report shall be submitted noting and explaining the reasons for the missing results. The missing data shall be submitted as soon as possible in a supplementary report.

The report shall also include the following: a summary description of the REMP; a map of all sampling locations keyed to a table giving distances and directions from one reactor; and the results of licensee participation in the Interlaboratory Comparison Program required by Control 1.3.3.

5.2 ANNUAL RADIOACTIVE EFFLUENT RELEASE REPORT

Annual Radioactive Effluent Release Reports shall include a summary of the quantities of radioactive liquid and gaseous effluents and solid waste shipped from the plant as delineated in Regulatory Guide 1.21, "Measuring, Evaluating, and Reporting Radioactivity in Solid Wastes and Releases of Radioactive Materials in Liquid and Gaseous Effluents from Light-Water-Cooled Nuclear Power Plants," Revision 1, June 1974, with data summarized on a quarterly basis following the format of Appendix B thereof.

The report shall include a summary of the meteorological conditions concurrent with the release of gaseous effluents during each quarter as outlined in Regulatory Guide 1.21, Revision 1, with data summarized on a quarterly bases following the format of Appendix B thereof. Calculated offsite dose to members of the public resulting from the release of liquid and gaseous effluents and their subsequent dispersion in the river and atmosphere shall be reported as recommended in Regulatory Guide 1.21, Revision 1.

5.0 ADMINISTRATIVE CONTROLS

5.2 ANNUAL RADIOACTIVE EFFLUENT RELEASE REPORT (continued)

The Annual Radioactive Effluent Release Report shall include the information regarding solid waste as specified in the Process Control Program.

5.3 OFFSITE DOSE CALCULATION MANUAL CHANGES

As required by BFN TS 5.5.1, changes to the ODCM:

1. Shall be documented and records of reviews performed shall be retained as required by process described in TVA-NQA-PLN89-A. This documentation shall contain:
 - a. Sufficient information to support the change(s) together with the appropriate analyses or evaluations justifying the change(s), and
 - b. A determination that the change will maintain the levels of radioactive effluent control required by 10 CFR 20.1302, 40 CFR 190, 10 CFR 50.36a, and 10 CFR 50, Appendix I, and not adversely impact the accuracy or reliability of effluent, dose, or setpoint calculations.
2. Shall become effective after review and acceptance by the process described in TVA-NQA-PLN89-A.
3. Shall be submitted to the NRC in the form of a complete, legible copy of the entire ODCM as a part of or concurrent with the Annual Radioactive Effluent Report for the period of the report in which any change to the ODCM was made. Each change shall be identified by markings in the margin of the affected pages, clearly indicating the area of the page that was changed, and shall indicate the date (i.e., month and year) the change was implemented.

5.4 SPECIAL REPORTS

Special Reports shall be submitted to the NRC in accordance with 10 CFR 50.4.

5.5 QUALITY ASSURANCE PROCEDURES

Quality Assurance procedures shall be established, implemented, and maintained for effluent and environmental monitoring, using the guidance in Regulatory Guide 1.21, Rev. 1, June 1974 and Regulatory Guide 4.1, April 1975 or Regulatory Guide 4.15, Dec. 1977.


SECTION 6.0

LIQUID EFFLUENTS

6.0 - LIQUID EFFLUENTS

RELEASE POINTS

The minimum flow available for dilution of radwaste are shown below:

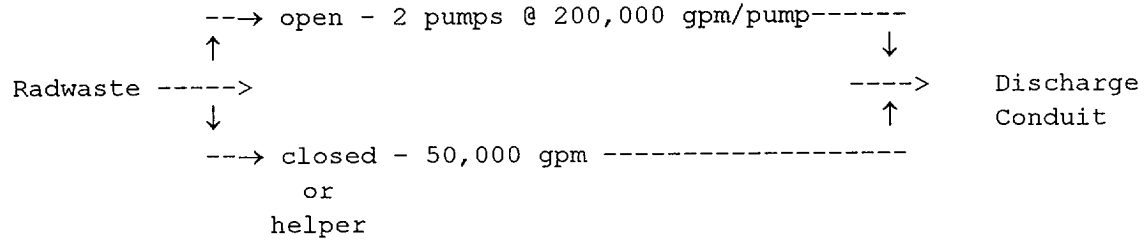

6.1 LIQUID RELEASES

6.1.1 Pre-release Analysis/ECL - Sum of the Ratios

Prior to a batch release, a grab sample will be analyzed to determine the concentration (C_i) of each gamma emitting radionuclide i in the radwaste tank. The following equation is used to calculate effluent concentration limit (ECL) fractions (M_i).

$$M_i = \frac{C_i}{ECL_i} \quad (6.1)$$

where:

M_i = ECL fraction of radionuclide i .

C_i = concentration of radionuclide i in the radwaste tank, $\mu\text{Ci/ml}$.

ECL_i = ECL of radionuclide i as specified in Control 1.2.1.1, $\mu\text{Ci/ml}$.

The sum of the ratios (R) will be calculated by the following relationship:

$$R = \sum_i M_i \quad (6.2)$$

where:

R = the sum of the ratios.

M_i = ECL fraction from equation 6.1.

6.1.2 Release Flow Rate Calculations

The sum of the ratios at the diffuser pipes must be ≤ 10 due to a liquid release. The following relationship will assure this criterion is met:

$$R[f/(f+F)] \leq 10 \quad (6.3)$$

where:

f = the effluent flow rate (gallons/minute) before dilution.

R = the sum of the ratios as determined by Equation 6.2.

F = minimum dilution flow rate for prerelease analysis.

The allowable release rate is calculated before each release and the release rate is continuously monitored during the release so that the ECL limit is not exceeded.

6.1.3 Post-release Analysis

A post-release analysis will be done using actual release data to ensure that the limits specified in Control 1.2.1.1 were not exceeded.

A composite list of concentrations (C_i) by isotope, will be used with actual liquid radwaste (f) and dilution (F) flow rates (or volumes) during the release. The data will be substituted into Equations 6.1, 6.2 and 6.3 to demonstrate compliance with the limits in Control 1.2.1.1. This data and setpoints will be recorded in auditable records by plant personnel.

6.2 INSTRUMENT SETPOINTS

Alarm/trip setpoints for each liquid monitor will be established and set such that Equation 6.3 is satisfied. The locations and identification numbers for each liquid effluent radiation detector are shown in Figures 6.1 and 6.2. This section of the ODCM describes the methodology that will be used to determine allowable values. The allowable values are then used to determine the physical settings on the monitors. The physical settings are calculated in the applicable Scaling and Setpoint Document.

6.2.1 Release Point Monitor Allowable Values

There is only one point through which routine releases are made from BFN, the Liquid Radwaste System. All releases from the Liquid Radwaste System are in a batch mode, and the monitor is looking at an undiluted waste stream as it comes out of a tank. The purpose of the monitor setpoint for these batch releases is to identify any release that would have the potential to exceed ten times the 10 CFR 20 limits after dilution. Allowable values used to determine the setpoints are calculated as described here.

For each release, a setpoint is calculated based on the monitor response to the activity in the release stream if the release were large enough to exceed ten times the 10 CFR 20 limits after dilution. This maximum calculated setpoint, S_{max} , is calculated using Equation 6.4 below. A comparison is made between this calculated setpoint and the default setpoint (see Section 6.2.2) to determine which is used. The actual monitor setpoint for the release is set equal to the default setpoint, or to the maximum calculated setpoint, whichever is less.

Calculated Maximum Monitor Setpoint

$$S_{max} = \frac{10 * SF (F_w + (FD * F_{dil}))}{F_w R} (ER - B) + B \quad (6.4)$$

where:

- SF = safety factor for the monitor.
- F_w = flow of waste stream, gpm.
- F_{dil} = flow of the dilution stream, gpm.
- FD = fraction of dilution flow allocated to this release point. For BFN this fraction is equal to one.
- B = background, cpm.
- R = sum of the ratios for the release point as calculated in Section 6.1.1.
- ER = expected monitor response, cpm,

$$= B + \sum_i E_i * C_i \quad (6.5)$$

where:

- B = monitor background, cpm.
- E_i = monitor efficiency for nuclide i, cpm per $\mu\text{Ci/cc}$.
- C_i = tank concentration of nuclide i, $\mu\text{Ci/cc}$.

6.2.2 Default Allowable Values

6.2.2.1 Radwaste Discharge Monitor

The default allowable value for the radwaste discharge monitor (RM-90-130), shown in Figures 6.1 and 6.2, will be established using the methodology below. The alarm/trip allowable value will be set such that Equation 6.3 is satisfied. The default trip allowable value for the monitor, which will automatically isolate the release, is set at less than or equal to the limit in Control 1.2.1.1. The alarm allowable value is set at 90% or less of the trip allowable value.

The default maximum activity concentration¹ of liquid radwaste that can be discharged can be calculated as:

$$A = \frac{F + f}{f * \sum_i \frac{WF_i}{ECL_i}}$$

where:

- A = default maximum batch activity concentration, $\mu\text{Ci/ml}$.
- ECL_i = ECL of radionuclide i as specified in Control 1.2.1.1, $\mu\text{Ci/ml}$.
- WF_i = weighting factor for nuclide i , defined as the fraction of the total concentration which is attributed to nuclide i .
- F = dilution water flow rate, gpm.
- f = maximum discharge flow rate, gpm.

¹ The default maximum activity concentration is based on a selected isotopic mixture so that an allowable value can be calculated. The selected isotopic mixture will be documented in 0-TI-45. If ten times the actual batch ECL fraction is less restrictive than ten times the ECL fraction for the selected isotopic mixture, then the actual activity concentration may be higher than the calculated maximum activity concentration; this is the case for which the maximum allowable value defined in Section 6.2.1 would be indicated.

The default monitor isolation allowable value, in cps, for releases is calculated using the following equation:

$$\text{Monitor Isolation Allowable Value} = (A * \sum_i \text{WF}_i * \text{E}_i) + B$$

where:

- A = maximum batch activity concentration as calculated above, $\mu\text{Ci/ml}$
- WF_i = weighting factor for nuclide i , defined as the fraction of the total concentration which is attributed to nuclide i
- E_i = efficiency of the monitor for nuclide i , $\text{cps}/\mu\text{Ci/ml}$
- B = monitor background, cps

The calculation of these allowable values are documented further in 0-TI-45, including the numerical values for each of the parameters described above.

6.2.2.2 Raw Cooling Water and Residual Heat Removal Service Water Monitors

The allowable value for the Raw Cooling Water (RCW) monitors and the Residual Heat Removal Service Water (RHRSW) monitors (RM-90-132 and RM-90-133,134 respectively), shown in Figure 6.1, will be established using the methodology below. The alarm/trip allowable values will be set such that Equation 6.3 is satisfied. The allowable values for these monitors, which will alarm in the control room, are based on ten times the 10 CFR 20 Appendix B concentration limits. These allowable values are also based on a selected isotopic mixture.

The monitor alarm allowable values, in cpm, for the RCW and RHRSW effluent monitors are calculated using the following equation:

$$\text{Monitor Allowable Values} \leq (A * \sum_i \text{WF}_i * \text{E}_i) + B$$

where:

- A = total activity concentration, $\mu\text{Ci/ml}$.
- WF_i = weighting factor for nuclide i , defined as the fraction of the total concentration which is attributed to nuclide i .
- E_i = efficiency of the monitor for nuclide i , $\text{cpm}/\mu\text{Ci/ml}$.
- B = monitor background, cpm.

The calculation of these allowable values are documented further in 0-TI-45, including the numerical values for each of the parameters described above.

6.3 CUMULATIVE LIQUID EFFLUENT DOSE CALCULATION

Doses due to liquid effluents are calculated for each release for all age groups (adult, teen, child and infant) and organs (bone, liver, total body, thyroid, skin, kidney, lung and GI tract). Pathways considered are drinking water ingestion, fish consumption and shoreline recreation. The maximum individual dose from drinking water is assumed to be that calculated at the location immediately downstream from the diffuser. The maximum individual dose from fish ingestion is assumed to be that calculated for the consumption of fish caught anywhere between the plant and the first downstream dam (Wheeler Dam). The maximum potential recreation dose is calculated for a location immediately downstream of the plant outfall. Dose factors for these age groups and pathways are calculated as described in Section 6.7. For pathways with no age or organ specific dose factors (i.e., shoreline recreation), the total body dose will be added to the internal organ dose for all age groups.

6.3.1 Dose Calculation

The general equation for the dose calculation for each organ j is:

$$D_j = \sum_i A_{ij} T C_i D \quad (6.6)$$

where:

- A_{ij} = the total dose factor to the total body or any organ j for nuclide i , mrem/h per $\mu\text{Ci/ml}$. The total dose factor is the sum of the dose factors for water ingestion, fish ingestion, and shoreline recreation, as defined in Section 6.7.
- T = the length of time period over which the concentrations and the flows are averaged for the liquid release, h .
- C_i = the average concentration of radionuclide i , in undiluted liquid effluent during the time period T from any liquid release, $\mu\text{Ci/ml}$.
- D = the near field average dilution factor for C_i during any effluent release.
- $$= \frac{\text{FLOW}_w}{0.30 \text{ RF}}$$

where:

- FLOW_w = maximum undiluted liquid waste flow during the release, cfs.
- 0.30 = mixing factor of effluent in river, defined as the percentage of the riverflow which is available for dilution of the release.
- RF = default riverflow, cfs. For each release, this value is set to 44,000 cfs (the average monthly riverflow for the period of 1986-1992).

From the four age groups considered, the maximum is determined by comparing all organ doses for all age groups. The age group with the highest single organ dose is selected as the critical age group.

6.3.2 Cumulative Doses

Quarterly and annual sums of all doses are determined for each release to compare to the limits given in ODCM Control 1.2.1.2. These quarterly and annual sums will be the sum of all the doses for each release in the quarter or year respectively.

6.3.3 Comparison to Limits

The cumulative calendar quarter and calendar year doses are compared to the limits in ODCM Control 1.2.1.2 prior to and after each liquid release.

6.4 LIQUID RADWASTE TREATMENT SYSTEM

The Liquid Radwaste Treatment System (LRTS) shall be maintained and operated to keep releases ALARA. A flow diagram for the LRTS is given in Figure 6.2.

6.5 DOSE PROJECTIONS

Dose projections will be done by averaging the calculated dose for the most recent month and the calculated dose for the previous month and assigning that average dose as the projection for the current month.

6.6 DOSE CALCULATIONS FOR REPORTING PURPOSES

A complete dose analysis utilizing the total estimated liquid releases for each calendar quarter will be performed and reported as required in ODCM Administrative Control 5.2. Methodology for this analysis is that which is described in this section using the quarterly release values reported by the plant personnel. The releases are assumed, for this calculation, to be continuous over the 90 day period.

The average dilution factor, D, used for these calculations is:

$$D = \frac{1}{RF * 0.30} \quad \begin{array}{l} \text{(for receptors upstream} \\ \text{of Wheeler Dam)} \end{array} \quad (6.13a)$$

and

$$D = \frac{1}{RF} \quad \begin{array}{l} \text{(for receptors downstream} \\ \text{of Wheeler Dam)} \end{array} \quad (6.13b)$$

where:

RF = the average actual riverflow for the location at which the dose is being determined, cfs.

0.30 = the fraction of the riverflow available for dilution in the near field, dimensionless.

6.6.1 Water Ingestion

Water ingestion doses are calculated for each Public Water Supply (PWS) identified within a 50 mile radius downstream of BFN (Table 6.1). Water ingestion doses are calculated for the total body and each internal organ as described below:

$$D_j = 10^6 (9.8E-09) A_{Wij} Q_i D \exp(-8.64E+04 \lambda_i t_d) \quad (6.14)$$

where:

10^6 = conversion factor, $\mu\text{Ci}/\text{Ci}$.

$9.8E-09$ = conversion factor, cfs per ml/h.

A_{Wij} = Dose factor for water ingestion for nuclide i, age group j, mrem/h per $\mu\text{Ci}/\text{ml}$, as calculated in Section 6.7.1.

Q_i = Quantity of nuclide i released during the quarter, Ci.

D = dilution factor, as described above, cfs^{-1} .

λ_i = radiological decay constant of nuclide i, s^{-1} (Table 6.3).

t_d = decay time for water ingestion, equal to the travel time from the plant to the water supply plus one-half day (12 hours) to account for the time of processing at the water supply (per Regulatory Guide 1.109), d.

$8.64E+04$ = conversion factor, s/d.

6.6.2 Fish Ingestion

Fish ingestion doses are calculated for each identified reach within a 50 mile radius downstream of BFN (Table 6.1). Individual fish ingestion doses are calculated for the total body and each internal organ as described below:

$$D_j = 10^6 (9.8E-09) 0.25 A_{Fij} Q_i D \exp(-8.64E+04 \lambda_i t_d) \quad (6.15)$$

where:

- 10^6 = conversion factor, $\mu\text{Ci}/\text{Ci}$.
- $9.8E-09$ = conversion factor, cfs per ml/h.
- 0.25 = fraction of the yearly fish consumption eaten in one quarter, dimensionless.
- A_{Fij} = Dose factor for fish ingestion for nuclide i , age group j , mrem/h per $\mu\text{Ci}/\text{ml}$, as calculated in ODCM Section 6.7.2.
- Q_i = Quantity of nuclide i released during the quarter, Ci.
- D = dilution factor, as described above, cfs^{-1} .
- λ_i = radiological decay constant of nuclide i , s^{-1} (Table 6.3).
- t_d = decay time for fish ingestion, equal to the travel time from the plant to the center of the reach plus one day to account for transit through the food chain and food preparation time (per Regulatory Guide 1.109), d.
- $8.64E+04$ = conversion factor, s/d.

6.6.3 Shoreline Recreation

Recreation doses are calculated for each identified reach within a 50 mile radius downstream of BFN (Table 6.1). It is assumed that the maximum exposed individual spends 500 hours per year on the shoreline at a location immediately downstream from the diffusers. Individual recreation shoreline doses are calculated for the total body and skin as described below:

$$D_{\text{org}} = 10^6 (9.8E-09) rf A_{Rij} Q_i D \exp(-8.64E+04 \lambda_i t_d) \quad (6.16)$$

where:

- 10^6 = conversion factor, $\mu\text{Ci}/\text{Ci}$.
- $9.8E-09$ = conversion factor, cfs per ml/h.
- rf = recreation factor, used to account for the fact that the same amount of time will not be spent at a recreation site during each quarter. Recreation factors used are:
 - 1st quarter - 0.1
 - 2nd quarter - 0.3
 - 3rd quarter - 0.4
 - 4th quarter - 0.2.

- A_{Rij} = Dose factor for shoreline recreation for nuclide i , age group j , mrem/h per $\mu\text{Ci/ml}$, as calculated in ODCM Section 6.7.3.
- Q_i = Quantity of nuclide i released during the quarter, Ci.
- D = dilution factor, as described above, cfs^{-1} .
- λ_i = radiological decay constant of nuclide i , s^{-1} (Table 6.3).
- t_d = decay time for recreation, equal to the travel time from the plant to the center of the reach, d.
- $8.64\text{E}+04$ = conversion factor, s/d.

6.6.4 Total Maximum Individual Dose

The total maximum individual total body dose is obtained by summing the following for each age group: the highest total body water ingestion dose from among all the public water supplies; the highest total body fish ingestion dose from among all the reaches; and the total body maximum shoreline recreation dose. The total maximum individual organ dose is obtained by summing the following for each organ and each age group: that organ's highest water ingestion dose from among all the public water supplies; that organ's highest fish ingestion dose from among all the reaches; and the total body maximum shoreline recreation dose. The total maximum individual skin dose is that skin dose calculated for the maximum shoreline dose.

6.6.5 Population Doses

For determining population doses to the 50-mile population around the plant, an average dose is calculated for each age group and each pathway and then multiplied by the population.

For water ingestion, the general equation used for calculating the population doses, POPWTR, in person-rem for a given PWS is:

$$POPWTR_j = 10^{-3} \sum_{m=1}^5 POP_m \sum_{a=1}^4 POP_a ATMW_a TWDOS_{amj} \quad (6.17)$$

where:

- POPWTR_j = water ingestion population dose to organ j, person-rem.
- POP_a = fraction of population in each age group a (from NUREG CR-1004, Table 3.39).
 - = 0.665 for adult
 - = 0.168 for child
 - = 0.015 for infant
 - = 0.153 for teen
- POP_m = population at PWS m. The 5 PWSs and their populations are listed in Table 6.1.
- ATMW_a = ratio of average to maximum water ingestion rates for each age group a. Maximum water ingestion rates are given in Table 6.3. Average water ingestion rates are obtained from R.G. 1.109 Table E-4). The ratios are:
 - = 0.5069 for adult
 - = 0.5098 for child
 - = 0.7879 for infant
 - = 0.5098 for teen
- TWDOS_{amj} = total individual water ingestion dose to organ j at PWS m, to the age group a, as described in Section 6.6.1, mrem.
- 10⁻³ = conversion factor for rem/mrem.

For population doses resulting from fish ingestion the calculation assumes that all fish caught within a 50-mile radius downstream of BFN are consumed by local population. An additional 7-days decay is added due to distribution time of sport fish. The general equation for calculating population doses, POPF, in person-rem from fish ingestion of all fish caught within a 50-mile radius downstream is:

$$POPF_j = 10^{-3} 10^{-3} \sum_{r=1}^3 \sum_{a=1}^3 \frac{453.6 HVST APR_r}{FISH_a POP_a} POP_a TFDOS_{arj} \quad (6.18)$$

where:
 POPF_j = total fish ingestion population dose to organ j, person-rem.
 HVST = fish harvest for the Tennessee River, 8.32 lbs/acre/y.
 APR_r = size of reach r, acres (Table 6.1).
 TFDOS_{arj} = total fish ingestion dose to organ j for reach r, for the age group a, as described in Section 6.6.2, mrem. Calculated with t_d in that equation equal to travel time plus 8 days.
 POP_a = fraction of population in each age group a, as given above.
 FISH_a = amount of fish ingested by each age group a, kg/y per person.
 The average fish ingestion rates (R.G. 1.109 Table E-4) are:
 Adult = 6.9
 Child = 2.2
 Teen = 5.2
 453.6 = conversion factor, g/lb.
 10⁻³ = conversion factor, rem/mrem.
 10⁻³ = conversion factor, kg/g.

For shoreline recreation, the general equation used for calculating the population doses, POPR, in person-rem is:

$$POPR_j = \frac{REQFRA}{10^3} \sum_{r=1}^3 SHVIS_r HRSVIS_r TSHDOS_{rj} \quad (6.19)$$

where:
 POPR_j = total recreation population dose for all reaches to organ j, person-rem.
 REQFRA = fraction of yearly recreation which occurs in that quarter, as given in Section 6.6.3, year per quarter.
 SHVIS_r = shoreline visits per year at each reach r, (Table 6.1).
 HRSVIS_r = length of shoreline recreation visit at reach r, 5 h.
 10³ = conversion factor, mrem/rem.
 TSHDOS_{rj} = total shoreline dose rate for organ j, in reach r, mrem-quarter/h per quarter.

$$= \frac{Q_i \exp(-\lambda_i t_r) K_C M DF_{Git} 10^{12} 24 10^3 D_r}{2.22E11 \lambda_i}$$

where:
 Q_i = total activity released during the quarter, Ci.
 λ_i = decay constant for nuclide i, d⁻¹.
 t_r = travel time from the plant to reach r, d.
 K_C = transfer coefficient from water to sediment, L/kg-h, (Table 6.3).
 M = mass density of sediment, kg/m², (Table 6.3).
 DF_{Git} = dose conversion factor for standing on contaminated ground for nuclide i and organ t (total body and skin), mrem/h per pCi/m².
 10¹² = conversion factor, pCi/Ci.
 24 = conversion factor, h/d.
 10³ = conversion factor, ml/L.
 D_r = dilution factor for reach r, cfs⁻¹. Calculated as described in Equation 6.13.
 2.22E11 = conversion factor, ml/quarter per cfs.

6.7 LIQUID DOSE FACTOR EQUATIONS

6.7.1 Water Ingestion Dose Factors

$$A_{Wij} = \frac{DF_{Liaj} U_{wa} 10^6 10^3}{8760}$$

where:

DF_{Liaj} = ingestion dose conversion factor for nuclide i , age group a , organ j , mrem/pCi, (Table 6.4).

U_{wa} = water consumption rate for age group a , L/y, (Table 6.3).

10^6 = conversion factor, pCi/ μ Ci.

10^3 = conversion factor, ml/L.

8760 = conversion factor, h/y.

6.7.2 Fish Ingestion Dose Factors

$$A_{Fij} = \frac{DF_{Liaj} U_{fa} B_i 10^6 10^3}{8760}$$

where:

DF_{Liaj} = ingestion dose conversion factor for nuclide i , age group a , organ j , mrem/pCi, (Table 6.4).

U_{fa} = fish consumption rate for age group a , kg/y, (Table 6.3).

B_i = bioaccumulation factor for nuclide i , pCi/kg per pCi/L, (Table 6.5).

10^6 = conversion factor, pCi/ μ Ci.

10^3 = conversion factor, ml/L.

8760 = conversion factor, h/y.

6.7.3 Shoreline Recreation Dose Factors

$$A_{Rij} = \frac{DF_{Gij} K_C M W 10^3 10^6 U}{8760 * 3600 \lambda_i} [1 - \exp(-\lambda_i t_{b1})]$$

where:

DF_{Gij} = dose conversion factor for standing on contaminated ground for nuclide i and organ j (total body and skin), mrem/h per pCi/m², (Table 6.6).

K_C = transfer coefficient from water to shoreline sediment, L/kg-h, (Table 6.3).

M = mass density of sediment, kg/m², (Table 6.3).

W = shoreline width factor, dimensionless, (Table 6.3).

10^3 = conversion factor, ml/L.

10^6 = conversion factor, pCi/ μ Ci.

3600 = conversion factor, s/h.

λ_i = decay constant for nuclide i , s⁻¹, (Table 6.2).

t_{b1} = time shoreline is exposed to the concentration in the water, s, (Table 6.3).

U = usage factor, 500 h/y.

8760 = conversion factor, h/y.

Table 6.1
RECEPTORS FOR LIQUID DOSE CALCULATIONS

Tennessee River Reaches Within
50 Mile Radius Downstream of BFN

<u>Name</u>	<u>Beginning TRM*</u>	<u>Ending TRM</u>	<u>Size (acres)</u>	<u>Recreation visits/y</u>
Wheeler Lake below BFN	294.0	274.9	26076	1,408,600
Wilson Lake	274.9	259.4	15930	3,816,800
Pickwick Lake	259.4	206.7	15048	705,500

Public Water Supplies Within
50 Mile Radius Downstream of BFN

<u>Name</u>	<u>TRM</u>	<u>Population</u>
West Morgan - East Lawrence, AL	286.5	25,000
Florence, AL	259.8	36,000
Muscle Shoals, AL	259.6	10,740
Sheffield, AL	254.3	13,065
Cherokee, AL	239.3	3,400

* TRM = Tennessee River Mile. Distances in this and other tables are consistent with memo L78 961104 800.

Table 6.2 (1 of 3)
RADIONUCLIDE DECAY AND STABLE ELEMENT TRANSFER DATA

Nuclide	Half-Life (minutes)	λ (1/s)	B_{iv}	F_{mi} (cow)	F_{mi} (goat)	F_{fi} (beef)
H-3	6.46E+06	1.79E-09	4.80E+00	1.00E-02	1.70E-01	1.20E-02
C-14	3.01E+09	3.84E-12	5.50E+00	1.20E-02	1.00E-01	3.10E-02
Na-24	9.00E+02	1.28E-05	5.20E-02	4.00E-02	4.00E-02	3.00E-02
P-32	2.06E+04	5.61E-07	1.10E+00	2.50E-02	2.50E-01	4.60E-02
Cr-51	3.99E+04	2.90E-07	2.50E-04	2.20E-03	2.20E-03	2.40E-03
Mn-54	4.50E+05	2.57E-08	2.90E-02	2.50E-04	2.50E-04	8.00E-04
Mn-56	1.55E+02	7.45E-05	2.90E-02	2.50E-04	2.50E-04	8.00E-04
Fe-55	1.42E+06	8.13E-09	6.60E-04	1.20E-03	1.30E-04	1.20E-02
Fe-59	6.43E+04	1.80E-07	6.60E-04	1.20E-03	1.30E-04	1.20E-02
Co-57	3.90E+05	2.96E-08	9.40E-03	1.00E-03	1.00E-03	1.30E-02
Co-58	1.02E+05	1.13E-07	9.40E-03	1.00E-03	1.00E-03	1.30E-02
Co-60	2.77E+06	4.17E-09	9.40E-03	1.00E-03	1.00E-03	1.30E-02
Ni-63	5.27E+07	2.19E-10	1.90E-02	6.70E-03	6.70E-03	5.30E-02
Ni-65	1.51E+02	7.65E-05	1.90E-02	6.70E-03	6.70E-03	5.30E-02
Cu-64	7.62E+02	1.52E-05	1.20E-01	1.40E-02	1.30E-02	9.70E-04
Zn-65	3.52E+05	3.28E-08	4.00E-01	3.90E-02	3.90E-02	3.00E-02
Zn-69m	8.26E+02	1.40E-05	4.00E-01	3.90E-02	3.90E-02	3.00E-02
Zn-69	5.56E+01	2.08E-04	4.00E-01	3.90E-02	3.90E-02	3.00E-02
Br-82	2.12E+03	5.45E-06	7.60E-01	5.00E-02	5.00E-02	2.60E-02
Br-83	1.43E+02	8.08E-05	7.60E-01	5.00E-02	5.00E-02	2.60E-02
Br-84	3.18E+01	3.63E-04	7.60E-01	5.00E-02	5.00E-02	2.60E-02
Br-85	2.87E+00	4.02E-03	7.60E-01	5.00E-02	5.00E-02	2.60E-02
Rb-86	2.69E+04	4.29E-07	1.30E-01	3.00E-02	3.00E-02	3.10E-02
Rb-88	1.78E+01	6.49E-04	1.30E-01	3.00E-02	3.00E-02	3.10E-02
Rb-89	1.54E+01	7.50E-04	1.30E-01	3.00E-02	3.00E-02	3.10E-02
Sr-89	7.28E+04	1.59E-07	1.70E-02	1.40E-03	1.40E-02	6.00E-04
Sr-90	1.50E+07	7.70E-10	1.70E-02	1.40E-03	1.40E-02	6.00E-04
Sr-91	5.70E+02	2.03E-05	1.70E-02	1.40E-03	1.40E-02	6.00E-04
Sr-92	1.63E+02	7.09E-05	1.70E-02	1.40E-03	1.40E-02	6.00E-04
Y-90	3.85E+03	3.00E-06	2.60E-03	1.00E-05	1.00E-05	4.60E-03
Y-91m	4.97E+01	2.32E-04	2.60E-03	1.00E-05	1.00E-05	4.60E-03
Y-91	8.43E+04	1.37E-07	2.60E-03	1.00E-05	1.00E-05	4.60E-03
Y-92	2.12E+02	5.45E-05	2.60E-03	1.00E-05	1.00E-05	4.60E-03
Y-93	6.06E+02	1.91E-05	2.60E-03	1.00E-05	1.00E-05	4.60E-03
Zr-95	9.22E+04	1.25E-07	1.70E-04	5.00E-06	5.00E-06	3.40E-02
Zr-97	1.01E+03	1.14E-05	1.70E-04	5.00E-06	5.00E-06	3.40E-02
Nb-95	5.05E+04	2.29E-07	9.40E-03	2.50E-03	2.50E-03	2.80E-01
Nb-97	7.21E+01	1.60E-04	9.40E-03	2.50E-03	2.50E-03	2.80E-01
Mo-99	3.96E+03	2.92E-06	1.20E-01	7.50E-03	7.50E-03	1.10E-03
Tc-99m	3.61E+02	3.20E-05	2.50E-01	2.50E-02	2.50E-02	4.00E-01
Tc-101	1.42E+01	8.13E-04	2.50E-01	2.50E-02	2.50E-02	4.00E-01
Ru-103	5.67E+04	2.04E-07	5.00E-02	1.00E-06	1.00E-06	4.00E-01
Ru-105	2.66E+02	4.34E-05	5.00E-02	1.00E-06	1.00E-06	4.00E-01
Ru-106	5.30E+05	2.18E-08	5.00E-02	1.00E-06	1.00E-06	4.00E-01
Ag-110m	3.60E+05	3.21E-08	1.50E-01	5.00E-02	5.00E-02	1.70E-02

Table 6.2 (2 of 3)
RADIONUCLIDE DECAY AND STABLE ELEMENT TRANSFER DATA

Nuclide	Half-Life (minutes)	λ (1/s)	B_{iv}	F_{mi} (cow)	F_{mi} (goat)	F_{fi} (beef)
Sb-124	8.67E+04	1.33E-07	N/A	1.50E-03	1.50E-03	N/A
Sb-125	1.46E+06	7.91E-09	N/A	1.50E-03	1.50E-03	N/A
Te-125m	8.35E+04	1.38E-07	1.30E+00	1.00E-03	1.00E-03	7.70E-02
Te-127m	1.57E+05	7.36E-08	1.30E+00	1.00E-03	1.00E-03	7.70E-02
Te-127	5.61E+02	2.06E-05	1.30E+00	1.00E-03	1.00E-03	7.70E-02
Te-129m	4.84E+04	2.39E-07	1.30E+00	1.00E-03	1.00E-03	7.70E-02
Te-129	6.96E+01	1.66E-04	1.30E+00	1.00E-03	1.00E-03	7.70E-02
Te-131m	1.80E+03	6.42E-06	1.30E+00	1.00E-03	1.00E-03	7.70E-02
Te-131	2.50E+01	4.62E-04	1.30E+00	1.00E-03	1.00E-03	7.70E-02
Te-132	4.69E+03	2.46E-06	1.30E+00	1.00E-03	1.00E-03	7.70E-02
I-130	7.42E+02	1.56E-05	2.00E-02	1.20E-02	4.30E-01	2.90E-03
I-131	1.16E+04	9.96E-07	2.00E-02	1.20E-02	4.30E-01	2.90E-03
I-132	1.38E+02	8.37E-05	2.00E-02	1.20E-02	4.30E-01	2.90E-03
I-133	1.25E+03	9.24E-06	2.00E-02	1.20E-02	4.30E-01	2.90E-03
I-134	5.26E+01	2.20E-04	2.00E-02	1.20E-02	4.30E-01	2.90E-03
I-135	3.97E+02	2.91E-05	2.00E-02	1.20E-02	4.30E-01	2.90E-03
Cs-134	1.08E+06	1.06E-08	1.00E-02	8.00E-03	3.00E-01	1.50E-02
Cs-136	1.90E+04	6.08E-07	1.00E-02	8.00E-03	3.00E-01	1.50E-02
Cs-137	1.59E+07	7.26E-10	1.00E-02	8.00E-03	3.00E-01	1.50E-02
Cs-138	3.22E+01	3.59E-04	1.00E-02	8.00E-03	3.00E-01	1.50E-02
Ba-139	8.31E+01	1.39E-04	5.00E-03	4.00E-04	4.00E-04	3.20E-03
Ba-140	1.84E+04	6.28E-07	5.00E-03	4.00E-04	4.00E-04	3.20E-03
Ba-141	1.83E+01	6.31E-04	5.00E-03	4.00E-04	4.00E-04	3.20E-03
Ba-142	1.07E+01	1.08E-03	5.00E-03	4.00E-04	4.00E-04	3.20E-03
La-140	2.41E+03	4.79E-06	2.50E-03	5.00E-06	5.00E-06	2.00E-04
La-142	9.54E+01	1.21E-04	2.50E-03	5.00E-06	5.00E-06	2.00E-04
Ce-141	4.68E+04	2.47E-07	2.50E-03	1.00E-04	1.00E-04	1.20E-03
Ce-143	1.98E+03	5.83E-06	2.50E-03	1.00E-04	1.00E-04	1.20E-03
Ce-144	4.09E+05	2.82E-08	2.50E-03	1.00E-04	1.00E-04	1.20E-03
Pr-143	1.95E+04	5.92E-07	2.50E-03	5.00E-06	5.00E-06	4.70E-03
Pr-144	1.73E+01	6.68E-04	2.50E-03	5.00E-06	5.00E-06	4.70E-03
Nd-147	1.58E+04	7.31E-07	2.40E-03	5.00E-06	5.00E-06	3.30E-03
W-187	1.43E+03	8.08E-06	1.80E-02	5.00E-04	5.00E-04	1.30E-03
Np-239	3.39E+03	3.41E-06	2.50E-03	5.00E-06	5.00E-06	2.00E-04
Ar-41	1.10E+02	1.05E-04	N/A	N/A	N/A	N/A
Kr-83m	1.10E+02	1.05E-04	N/A	N/A	N/A	N/A
Kr-85m	2.69E+02	4.29E-05	N/A	N/A	N/A	N/A
Kr-85	5.64E+06	2.05E-09	N/A	N/A	N/A	N/A
Kr-87	7.63E+01	1.51E-04	N/A	N/A	N/A	N/A
Kr-88	1.70E+02	6.79E-05	N/A	N/A	N/A	N/A
Kr-89	3.16E+00	3.66E-03	N/A	N/A	N/A	N/A
Kr-90	5.39E-01	2.14E-02	N/A	N/A	N/A	N/A
Xe-131m	1.70E+04	6.79E-07	N/A	N/A	N/A	N/A
Xe-133m	3.15E+03	3.67E-06	N/A	N/A	N/A	N/A

Table 6.2 (3 of 3)
RADIONUCLIDE DECAY AND STABLE ELEMENT TRANSFER DATA

Nuclide	Half-Life (minutes)	λ (1/s)	B_{iv}	F_{mi} (cow)	F_{mi} (goat)	F_{fi} (beef)
Xe-133	7.55E+03	1.53E-06	N/A	N/A	N/A	N/A
Xe-135m	1.54E+01	7.50E-04	N/A	N/A	N/A	N/A
Xe-135	5.47E+02	2.11E-05	N/A	N/A	N/A	N/A
Xe-137	3.83E+00	3.02E-03	N/A	N/A	N/A	N/A
Xe-138	1.41E+01	8.19E-04	N/A	N/A	N/A	N/A

References:

Half lives for all nuclides: DOE-TIC-11026, "Radioactive Decay Data Tables - A Handbook of Decay Data for Application to Radiation Dosimetry and Radiological Assessment," D. C. Kocher, 1981.

Transfer factors for Sb- isotopes are from ORNL 4992, "Methodology for Calculating Radiation Doses from Radioactivity Released to the Environment," March 1976, Table 2-7.

Cow-milk transfer factors for Iodine, Strontium, and Cesium nuclides are from NUREG/CR-1004, Table 3.17.

Goat-milk transfer factors for Iodine nuclides are from NUREG/CR-1004, Table 3.17.

Beef transfer factors for Iron, Copper, Molybdenum, and Cesium nuclides are from NUREG/CR-1004, Table 3.18.

All other nuclides' transfer factors are from Regulatory Guide 1.109, Tables E-1 and E-2.

Table 6.3 (1 of 2)
DOSE CALCULATION FACTORS

Factor	Value	Units	Reference
BR _a (infant)	1400	m ³ /y	ICRP 23
BR _a (child)	5500	m ³ /y	ICRP 23
BR _a (teen)	8000	m ³ /y	ICRP 23
BR _a (adult)	8100	m ³ /y	ICRP 23
f _g	1		TVA Assumption
f _L	1		R. G. 1.109 (Table E-15)
f _p	1		TVA Assumption
f _s	0		TVA Assumption
H	9	g/m ³	TVA Value
K _c	0.072	L/kg-h	R. G. 1.109 (Section 2.C.)
M	40	kg/m ²	R. G. 1.109 (Section 2.C.)
P	240	kg/m ²	R. G. 1.109 (Table E-15)
Q _f (cow)	64	kg/d	NUREG/CR-1004 (Sect. 3.4)
Q _f (goat)	08	kg/d	NUREG/CR-1004 (Sect. 3.4)
r	0.47		NUREG/CR-1004 (Sect. 3.2)
t _b	4.73E+08	s	R. G. 1.109 (Table E-15)
	(15 y)		
t _{b1}	4.73E+08	s	R. G. 1.109 (Table E-15)
	(15 y)		
t _{cb}	7.78E+06	s	SQN FSAR Section 11.3.9.1
	(90 d)		
t _{csf}	1.56E+07	s	SQN FSAR Section 11.3.9.1
	(180 d)		
t _e	5.18E+06	s	R. G. 1.109 (Table E-15)
	(60 d)		
t _{ep}	2.59E+06	s	R. G. 1.109 (Table E-15)
	(30 d)		
t _{esf}	7.78E+06	s	R. G. 1.109 (Table E-15)
	(90 d)		
t _{fm}	8.64E+04	s	SQN FSAR Section 11.3.9.1
	(1 d)		
t _{hc}	8.64E+04	s	NUREG/CR-1004, Table 3.40
	(1 d)		
t _s	1.12E+06	s	NUREG/CR-1004, Table 3.40
	(13 d)		
t _{sv}	2.38E+07	s	SQN FSAR Section 11.3.9.1
	(275 d)		
U _m (infant)	0	kg/y	R. G. 1.109 (Table E-5)
U _m (child)	41	kg/y	R. G. 1.109 (Table E-5)
U _m (teen)	65	kg/y	R. G. 1.109 (Table E-5)
U _m (adult)	110	kg/y	R. G. 1.109 (Table E-5)
U _p (infant)	330	L/y	R. G. 1.109 (Table E-5)
U _p (child)	330	L/y	R. G. 1.109 (Table E-5)
U _p (teen)	400	L/y	R. G. 1.109 (Table E-5)
U _p (adult)	310	L/y	R. G. 1.109 (Table E-5)

Table 6.3 (2 of 2)
DOSE CALCULATION FACTORS

Factor	Value	Units	Reference
U_f (infant)	0	kg/y	R. G. 1.109 (Table E-5)
U_f (child)	6.9	kg/y	R. G. 1.109 (Table E-5)
U_f (teen)	16	kg/y	R. G. 1.109 (Table E-5)
U_f (adult)	21	kg/y	R. G. 1.109 (Table E-5)
U_{FL} (infant)	0	kg/y	R. G. 1.109 (Table E-5)
U_{FL} (child)	26	kg/y	R. G. 1.109 (Table E-5)
U_{FL} (teen)	42	kg/y	R. G. 1.109 (Table E-5)
U_{FL} (adult)	64	kg/y	R. G. 1.109 (Table E-5)
U_S (infant)	0	kg/y	R. G. 1.109 (Table E-5)
U_S (child)	520	kg/y	R. G. 1.109 (Table E-5)
U_S (teen)	630	kg/y	R. G. 1.109 (Table E-5)
U_S (adult)	520	kg/y	R. G. 1.109 (Table E-5)
U_W (infant)	330	L/y	R. G. 1.109 (Table E-5)
U_W (child)	510	L/y	R. G. 1.109 (Table E-5)
U_W (teen)	510	L/y	R. G. 1.109 (Table E-5)
U_W (adult)	730	L/y	R. G. 1.109 (Table E-5)
W	0.3	none	R. G. 1.109 (Table A-2)
Y_V	1.85	kg/m ²	NUREG/CR-1004 (Table 3.4)
Y_P	1.18	kg/m ²	NUREG/CR-1004 (Table 3.3)
Y_S	0.64	kg/m ²	NUREG/CR-1004 (Table 3.3)
Y_{SV}	0.57	kg/m ²	NUREG/CR-1004 (Table 3.4) (value selected is for non-leafy vegetables)
λ_{wr} (iodines)	7.71E-07	s ⁻¹ (15.4 d half-life)	NUREG/CR-1004 (Table 3.10)
λ_w (particulates)	5.21E-07	s ⁻¹ (10.4 d half-life)	NUREG/CR-1004 (Table 3.10)

Table 6.4 (1 of 8)
INGESTION DOSE FACTORS
(mrem/pCi ingested)

Nuclide	ADULT						
	bone	liver	t body	thyroid	kidney	lung	gi-lli
H-3	1.05E-07	1.05E-07	1.05E-07	1.05E-07	1.05E-07	1.05E-07	1.05E-07
C-14	2.84E-06	5.68E-07	5.68E-07	5.68E-07	5.68E-07	5.68E-07	5.68E-07
Na-24	1.70E-06	1.70E-06	1.70E-06	1.70E-06	1.70E-06	1.70E-06	1.70E-06
P-32	1.93E-04	1.20E-05	7.46E-06	0.00E+00	0.00E+00	0.00E+00	2.17E-05
Cr-51	0.00E+00	0.00E+00	2.66E-09	1.59E-09	5.86E-10	3.53E-09	6.69E-07
Mn-54	0.00E+00	4.57E-06	8.72E-07	0.00E+00	1.36E-06	0.00E+00	1.40E-05
Mn-56	0.00E+00	1.15E-07	2.04E-08	0.00E+00	1.46E-07	0.00E+00	3.67E-06
Fe-55	2.75E-06	1.90E-06	4.43E-07	0.00E+00	0.00E+00	1.06E-06	1.09E-06
Fe-59	4.34E-06	1.02E-05	3.91E-06	0.00E+00	0.00E+00	2.85E-06	3.40E-05
Co-57	0.00E+00	1.75E-07	2.91E-07	0.00E+00	0.00E+00	0.00E+00	4.44E-06
Co-58	0.00E+00	7.45E-07	1.67E-06	0.00E+00	0.00E+00	0.00E+00	1.51E-05
Co-60	0.00E+00	2.14E-06	4.72E-06	0.00E+00	0.00E+00	0.00E+00	4.02E-05
Ni-63	1.30E-04	9.01E-06	4.36E-06	0.00E+00	0.00E+00	0.00E+00	1.88E-06
Ni-65	5.28E-07	6.86E-08	3.13E-08	0.00E+00	0.00E+00	0.00E+00	1.74E-06
Cu-64	0.00E+00	8.33E-08	3.91E-08	0.00E+00	2.10E-07	0.00E+00	7.10E-06
Zn-65	4.84E-06	1.54E-05	6.96E-06	0.00E+00	1.03E-05	0.00E+00	9.70E-06
Zn-69	1.03E-08	1.97E-08	1.37E-09	0.00E+00	1.28E-08	0.00E+00	2.96E-09
Zn-69m	1.70E-07	4.08E-07	3.73E-08	0.00E+00	2.47E-07	0.00E+00	2.49E-05
Br-82	0.00E+00	0.00E+00	2.26E-06	0.00E+00	0.00E+00	0.00E+00	2.59E-06
Br-83	0.00E+00	0.00E+00	4.02E-08	0.00E+00	0.00E+00	0.00E+00	5.79E-08
Br-84	0.00E+00	0.00E+00	5.21E-08	0.00E+00	0.00E+00	0.00E+00	4.09E-13
Br-85	0.00E+00	0.00E+00	2.14E-09	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Rb-86	0.00E+00	2.11E-05	9.83E-06	0.00E+00	0.00E+00	0.00E+00	4.16E-06
Rb-88	0.00E+00	6.05E-08	3.21E-08	0.00E+00	0.00E+00	0.00E+00	8.36E-19
Rb-89	0.00E+00	4.01E-08	2.82E-08	0.00E+00	0.00E+00	0.00E+00	2.33E-21
Sr-89	3.08E-04	0.00E+00	8.84E-06	0.00E+00	0.00E+00	0.00E+00	4.94E-05
Sr-90	7.58E-03	0.00E+00	1.86E-03	0.00E+00	0.00E+00	0.00E+00	2.19E-04
Sr-91	5.67E-06	0.00E+00	2.29E-07	0.00E+00	0.00E+00	0.00E+00	2.70E-05
Sr-92	2.15E-06	0.00E+00	9.30E-08	0.00E+00	0.00E+00	0.00E+00	4.26E-05
Y-90	9.62E-09	0.00E+00	2.58E-10	0.00E+00	0.00E+00	0.00E+00	1.02E-04
Y-91m	9.09E-11	0.00E+00	3.52E-12	0.00E+00	0.00E+00	0.00E+00	2.67E-10
Y-91	1.41E-07	0.00E+00	3.77E-09	0.00E+00	0.00E+00	0.00E+00	7.76E-05
Y-92	8.45E-10	0.00E+00	2.47E-11	0.00E+00	0.00E+00	0.00E+00	1.48E-05
Y-93	2.68E-09	0.00E+00	7.40E-11	0.00E+00	0.00E+00	0.00E+00	8.50E-05
Zr-95	3.04E-08	9.75E-09	6.60E-09	0.00E+00	1.53E-08	0.00E+00	3.09E-05
Zr-97	1.68E-09	3.39E-10	1.55E-10	0.00E+00	5.12E-10	0.00E+00	1.05E-04
Nb-95	6.22E-09	3.46E-09	1.86E-09	0.00E+00	3.42E-09	0.00E+00	2.10E-05
Nb-97	5.22E-11	1.32E-11	4.82E-12	0.00E+00	1.54E-11	0.00E+00	4.87E-08
Mo-99	0.00E+00	4.31E-06	8.20E-07	0.00E+00	9.76E-06	0.00E+00	9.99E-06
Tc-99m	2.47E-10	6.98E-10	8.89E-09	0.00E+00	1.06E-08	3.42E-10	4.13E-07
Tc-101	2.54E-10	3.66E-10	3.59E-09	0.00E+00	6.59E-09	1.87E-10	1.10E-21
Ru-103	1.85E-07	0.00E+00	7.97E-08	0.00E+00	7.06E-07	0.00E+00	2.16E-05
Ru-105	1.54E-08	0.00E+00	6.08E-09	0.00E+00	1.99E-07	0.00E+00	9.42E-06
Ru-106	2.75E-06	0.00E+00	3.48E-07	0.00E+00	5.31E-06	0.00E+00	1.78E-04
Ag-110m	1.60E-07	1.48E-07	8.79E-08	0.00E+00	2.91E-07	0.00E+00	6.04E-05

Table 6.4 (2 of 8)
INGESTION DOSE FACTORS
(mrem/pCi ingested)

Nuclide	ADULT						
	bone	liver	t body	thyroid	kidney	lung	gi-lli
Sb-124	2.80E-06	5.29E-08	1.11E-06	6.79E-09	0.00E-00	2.18E-06	7.95E-05
Sb-125	1.79E-06	2.00E-08	4.26E-07	1.82E-09	0.00E-00	1.38E-06	1.97E-05
Te-125m	2.68E-06	9.71E-07	3.59E-07	8.06E-07	1.09E-05	0.00E+00	1.07E-05
Te-127m	6.77E-06	2.42E-06	8.25E-07	1.73E-06	2.75E-05	0.00E+00	2.27E-05
Te-127	1.10E-07	3.95E-08	2.38E-08	8.15E-08	4.48E-07	0.00E+00	8.68E-06
Te-129m	1.15E-05	4.29E-06	1.82E-06	3.95E-06	4.80E-05	0.00E+00	5.79E-05
Te-129	3.14E-08	1.18E-08	7.65E-09	2.41E-08	1.32E-07	0.00E+00	2.37E-08
Te-131m	1.73E-06	8.46E-07	7.05E-07	1.34E-06	8.57E-06	0.00E+00	8.40E-05
Te-131	1.97E-08	8.23E-09	6.22E-09	1.62E-08	8.63E-08	0.00E+00	2.79E-09
Te-132	2.52E-06	1.63E-06	1.53E-06	1.80E-06	1.57E-05	0.00E+00	7.71E-05
I-130	7.56E-07	2.23E-06	8.80E-07	1.89E-04	3.48E-06	0.00E+00	1.92E-06
I-131	4.16E-06	5.95E-06	3.41E-06	1.95E-03	1.02E-05	0.00E+00	1.57E-06
I-132	2.03E-07	5.43E-07	1.90E-07	1.90E-05	8.65E-07	0.00E+00	1.02E-07
I-133	1.42E-06	2.47E-06	7.53E-07	3.63E-04	4.31E-06	0.00E+00	2.22E-06
I-134	1.06E-07	2.88E-07	1.03E-07	4.99E-06	4.58E-07	0.00E+00	2.51E-10
I-135	4.43E-07	1.16E-06	4.28E-07	7.65E-05	1.86E-06	0.00E+00	1.31E-06
Cs-134	6.22E-05	1.48E-04	1.21E-04	0.00E+00	4.79E-05	1.59E-05	2.59E-06
Cs-136	6.51E-06	2.57E-05	1.85E-05	0.00E+00	1.43E-05	1.96E-06	2.92E-06
Cs-137	7.97E-05	1.09E-04	7.14E-05	0.00E+00	3.70E-05	1.23E-05	2.11E-06
Cs-138	5.52E-08	1.09E-07	5.40E-08	0.00E+00	8.01E-08	7.91E-09	4.65E-13
Ba-139	9.70E-08	6.91E-11	2.84E-09	0.00E+00	6.46E-11	3.92E-11	1.72E-07
Ba-140	2.03E-05	2.55E-08	1.33E-06	0.00E+00	8.67E-09	1.46E-08	4.18E-05
Ba-141	4.71E-08	3.56E-11	1.59E-09	0.00E+00	3.31E-11	2.02E-11	2.22E-17
Ba-142	2.13E-08	2.19E-11	1.34E-09	0.00E+00	1.85E-11	1.24E-11	3.00E-26
La-140	2.50E-09	1.26E-09	3.33E-10	0.00E+00	0.00E+00	0.00E+00	9.25E-05
La-142	1.28E-10	5.82E-11	1.45E-11	0.00E+00	0.00E+00	0.00E+00	4.25E-07
Ce-141	9.36E-09	6.33E-09	7.18E-10	0.00E+00	2.94E-09	0.00E+00	2.42E-05
Ce-143	1.65E-09	1.22E-06	1.35E-10	0.00E+00	5.37E-10	0.00E+00	4.56E-05
Ce-144	4.88E-07	2.04E-07	2.62E-08	0.00E+00	1.21E-07	0.00E+00	1.65E-04
Pr-143	9.20E-09	3.69E-09	4.56E-10	0.00E+00	2.13E-09	0.00E+00	4.03E-05
Pr-144	3.01E-11	1.25E-11	1.53E-12	0.00E+00	7.05E-12	0.00E+00	4.33E-18
Nd-147	6.29E-09	7.27E-09	4.35E-10	0.00E+00	4.25E-09	0.00E+00	3.49E-05
W-187	1.03E-07	8.61E-08	3.01E-08	0.00E+00	0.00E+00	0.00E+00	2.82E-05
Np-239	1.19E-09	1.17E-10	6.45E-11	0.00E+00	3.65E-10	0.00E+00	2.40E-05

References:

Dose Factors for Co-57, Zn-69m, Br-82, Nb-97, Sb-124 and Sb-125 are from NUREG-0172 Age Specific Radiation Dose Commitment Factors for a One Year Chronic Intake, November, 1977, Table 4.

All others:

Regulatory Guide 1.109, Table E-11.

NOTE: The tritium dose factor for bone is assumed to be equal to the total body dose factor.

Table 6.4 (3 of 8)
INGESTION DOSE FACTORS
(mrem/pCi ingested)

Nuclide	TEEN						
	bone	liver	t body	thyroid	kidney	lung	gi-lli
H-3	1.06E-07	1.06E-07	1.06E-07	1.06E-07	1.06E-07	1.06E-07	1.06E-07
C-14	4.06E-06	8.12E-07	8.12E-07	8.12E-07	8.12E-07	8.12E-07	8.12E-07
Na-24	2.30E-06	2.30E-06	2.30E-06	2.30E-06	2.30E-06	2.30E-06	2.30E-06
P-32	2.76E-04	1.71E-05	1.07E-05	0.00E+00	0.00E+00	0.00E+00	2.32E-05
Cr-51	0.00E+00	0.00E+00	3.60E-09	2.00E-09	7.89E-10	5.14E-09	6.05E-07
Mn-54	0.00E+00	5.90E-06	1.17E-06	0.00E+00	1.76E-06	0.00E+00	1.21E-05
Mn-56	0.00E+00	1.58E-07	2.81E-08	0.00E+00	2.00E-07	0.00E+00	1.04E-05
Fe-55	3.78E-06	2.68E-06	6.25E-07	0.00E+00	0.00E+00	1.70E-06	1.16E-06
Fe-59	5.87E-06	1.37E-05	5.29E-06	0.00E+00	0.00E+00	4.32E-06	3.24E-05
Co-57	0.00E+00	2.38E-07	3.99E-07	0.00E+00	0.00E+00	0.00E+00	4.44E-06
Co-58	0.00E+00	9.72E-07	2.24E-06	0.00E+00	0.00E+00	0.00E+00	1.34E-05
Co-60	0.00E+00	2.81E-06	6.33E-06	0.00E+00	0.00E+00	0.00E+00	3.66E-05
Ni-63	1.77E-04	1.25E-05	6.00E-06	0.00E+00	0.00E+00	0.00E+00	1.99E-06
Ni-65	7.49E-07	9.57E-08	4.36E-08	0.00E+00	0.00E+00	0.00E+00	5.19E-06
Cu-64	0.00E+00	1.15E-07	5.41E-08	0.00E+00	2.91E-07	0.00E+00	8.92E-06
Zn-65	5.76E-06	2.00E-05	9.33E-06	0.00E+00	1.28E-05	0.00E+00	8.47E-06
Zn-69	1.47E-08	2.80E-08	1.96E-09	0.00E+00	1.83E-08	0.00E+00	5.16E-08
Zn-69m	2.40E-07	5.66E-07	5.19E-08	0.00E+00	3.44E-07	0.00E+00	3.11E-05
Br-82	0.00E+00	0.00E+00	3.04E-06	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Br-83	0.00E+00	0.00E+00	5.74E-08	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Br-84	0.00E+00	0.00E+00	7.22E-08	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Br-85	0.00E+00	0.00E+00	3.05E-09	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Rb-86	0.00E+00	2.98E-05	1.40E-05	0.00E+00	0.00E+00	0.00E+00	4.41E-06
Rb-88	0.00E+00	8.52E-08	4.54E-08	0.00E+00	0.00E+00	0.00E+00	7.30E-15
Rb-89	0.00E+00	5.50E-08	3.89E-08	0.00E+00	0.00E+00	0.00E+00	8.43E-17
Sr-89	4.40E-04	0.00E+00	1.26E-05	0.00E+00	0.00E+00	0.00E+00	5.24E-05
Sr-90	8.30E-03	0.00E+00	2.05E-03	0.00E+00	0.00E+00	0.00E+00	2.33E-04
Sr-91	8.07E-06	0.00E+00	3.21E-07	0.00E+00	0.00E+00	0.00E+00	3.66E-05
Sr-92	3.05E-06	0.00E+00	1.30E-07	0.00E+00	0.00E+00	0.00E+00	7.77E-05
Y-90	1.37E-08	0.00E+00	3.69E-10	0.00E+00	0.00E+00	0.00E+00	1.13E-04
Y-91m	1.29E-10	0.00E+00	4.93E-12	0.00E+00	0.00E+00	0.00E+00	6.09E-09
Y-91	2.01E-07	0.00E+00	5.39E-09	0.00E+00	0.00E+00	0.00E+00	8.24E-05
Y-92	1.21E-09	0.00E+00	3.50E-11	0.00E+00	0.00E+00	0.00E+00	3.32E-05
Y-93	3.83E-09	0.00E+00	1.05E-10	0.00E+00	0.00E+00	0.00E+00	1.17E-04
Zr-95	4.12E-08	1.30E-08	8.94E-09	0.00E+00	1.91E-08	0.00E+00	3.00E-05
Zr-97	2.37E-09	4.69E-10	2.16E-10	0.00E+00	7.11E-10	0.00E+00	1.27E-04
Nb-95	8.22E-09	4.56E-09	2.51E-09	0.00E+00	4.42E-09	0.00E+00	1.95E-05
Nb-97	7.37E-11	1.83E-11	6.68E-12	0.00E+00	2.14E-11	0.00E+00	4.37E-07
Mo-99	0.00E+00	6.03E-06	1.15E-06	0.00E+00	1.38E-05	0.00E+00	1.08E-05
Tc-99m	3.32E-10	9.26E-10	1.20E-08	0.00E+00	1.38E-08	5.14E-10	6.08E-07
Tc-101	3.60E-10	5.12E-10	5.03E-09	0.00E+00	9.26E-09	3.12E-10	8.75E-17
Ru-103	2.55E-07	0.00E+00	1.09E-07	0.00E+00	8.99E-07	0.00E+00	2.13E-05
Ru-105	2.18E-08	0.00E+00	8.46E-09	0.00E+00	2.75E-07	0.00E+00	1.76E-05
Ru-106	3.92E-06	0.00E+00	4.94E-07	0.00E+00	7.56E-06	0.00E+00	1.88E-04
Ag-110m	2.05E-07	1.94E-07	1.18E-07	0.00E+00	3.70E-07	0.00E+00	5.45E-05

Table 6.4 (4 of 8)
INGESTION DOSE FACTORS
(mrem/pCi ingested)

Nuclide	TEEN						
	bone	liver	t body	thyroid	kidney	lung	gi-lli
Sb-124	3.87E-06	7.13E-08	1.51E-06	8.78E-09	0.00E-00	3.38E-06	7.80E-05
Sb-125	2.48E-06	2.71E-08	5.80E-07	2.37E-09	0.00E+00	2.18E-06	1.93E-05
Te-125m	3.83E-06	1.38E-06	5.12E-07	1.07E-06	0.00E+00	0.00E+00	1.13E-05
Te-127m	9.67E-06	3.43E-06	1.15E-06	2.30E-06	3.92E-05	0.00E+00	2.41E-05
Te-127	1.58E-07	5.60E-08	3.40E-08	1.09E-07	6.40E-07	0.00E+00	1.22E-05
Te-129m	1.63E-05	6.05E-06	2.58E-06	5.26E-06	6.82E-05	0.00E+00	6.12E-05
Te-129	4.48E-08	1.67E-08	1.09E-08	3.20E-08	1.88E-07	0.00E+00	2.45E-07
Te-131m	2.44E-06	1.17E-06	9.76E-07	1.76E-06	1.22E-05	0.00E+00	9.39E-05
Te-131	2.79E-08	1.15E-08	8.72E-09	2.15E-08	1.22E-07	0.00E+00	2.29E-09
Te-132	3.49E-06	2.21E-06	2.08E-06	2.33E-06	2.12E-05	0.00E+00	7.00E-05
I-130	1.03E-06	2.98E-06	1.19E-06	2.43E-04	4.59E-06	0.00E+00	2.29E-06
I-131	5.85E-06	8.19E-06	4.40E-06	2.39E-03	1.41E-05	0.00E+00	1.62E-06
I-132	2.79E-07	7.30E-07	2.62E-07	2.46E-05	1.15E-06	0.00E+00	3.18E-07
I-133	2.01E-06	3.41E-06	1.04E-06	4.76E-04	5.98E-06	0.00E+00	2.58E-06
I-134	1.46E-07	3.87E-07	1.39E-07	6.45E-06	6.10E-07	0.00E+00	5.10E-09
I-135	6.10E-07	1.57E-06	5.82E-07	1.01E-04	2.48E-06	0.00E+00	1.74E-06
Cs-134	8.37E-05	1.97E-04	9.14E-05	0.00E+00	6.26E-05	2.39E-05	2.45E-06
Cs-136	8.59E-06	3.38E-05	2.27E-05	0.00E+00	1.84E-05	2.90E-06	2.72E-06
Cs-137	1.12E-04	1.49E-04	5.19E-05	0.00E+00	5.07E-05	1.97E-05	2.12E-06
Cs-138	7.76E-08	1.49E-07	7.45E-08	0.00E+00	1.10E-07	1.28E-08	6.76E-11
Ba-139	1.39E-07	9.78E-11	4.05E-09	0.00E+00	9.22E-11	6.74E-11	1.24E-06
Ba-140	2.84E-05	3.48E-08	1.83E-06	0.00E+00	1.18E-08	2.34E-08	4.38E-05
Ba-141	6.71E-08	5.01E-11	2.24E-09	0.00E+00	4.65E-11	3.43E-11	1.43E-13
Ba-142	2.99E-08	2.99E-11	1.84E-09	0.00E+00	2.53E-11	1.99E-11	9.18E-20
La-140	3.48E-09	1.71E-09	4.55E-10	0.00E+00	0.00E+00	0.00E+00	9.82E-05
La-142	1.79E-10	7.95E-11	1.98E-11	0.00E+00	0.00E+00	0.00E+00	2.42E-06
Ce-141	1.33E-08	8.88E-09	1.02E-09	0.00E+00	4.18E-09	0.00E+00	2.54E-05
Ce-143	2.35E-09	1.71E-06	1.91E-10	0.00E+00	7.67E-10	0.00E+00	5.14E-05
Ce-144	6.96E-07	2.88E-07	3.74E-08	0.00E+00	1.72E-07	0.00E+00	1.75E-04
Pr-143	1.31E-08	5.23E-09	6.52E-10	0.00E+00	3.04E-09	0.00E+00	4.31E-05
Pr-144	4.30E-11	1.76E-11	2.18E-12	0.00E+00	1.01E-11	0.00E+00	4.74E-14
Nd-147	9.38E-09	1.02E-08	6.11E-10	0.00E+00	5.99E-09	0.00E+00	3.68E-05
W-187	1.46E-07	1.19E-07	4.17E-08	0.00E+00	0.00E+00	0.00E+00	3.22E-05
Np-239	1.76E-09	1.66E-10	9.22E-11	0.00E+00	5.21E-10	0.00E+00	2.67E-05

References:

Dose Factors for Co-57, Zn-69m, Br-82, Nb-97, Sb-124 and Sb-125 are from NUREG-0172 Age Specific Radiation Dose Commitment Factors for a One Year Chronic Intake,, November, 1977, Table 3.

All others:

Regulatory Guide 1.109, Table E-12.

NOTE: The tritium dose factor for bone is assumed to be equal to the total body dose factor.

Table 6.4 (5 of 8)
INGESTION DOSE FACTORS
(mrem/pCi ingested)

Nuclide	CHILD						
	bone	liver	t body	thyroid	kidney	lung	gi-lli
H-3	2.03E-07	2.03E-07	2.03E-07	2.03E-07	2.03E-07	2.03E-07	2.03E-07
C-14	1.21E-05	2.42E-06	2.42E-06	2.42E-06	2.42E-06	2.42E-06	2.42E-06
Na-24	5.80E-06	5.80E-06	5.80E-06	5.80E-06	5.80E-06	5.80E-06	5.80E-06
P-32	8.25E-04	3.86E-05	3.18E-05	0.00E+00	0.00E+00	0.00E+00	2.28E-05
Cr-51	0.00E+00	0.00E+00	8.90E-09	4.94E-09	1.35E-09	9.02E-09	4.72E-07
Mn-54	0.00E+00	1.07E-05	2.85E-06	0.00E+00	3.00E-06	0.00E+00	8.98E-06
Mn-56	0.00E+00	3.34E-07	7.54E-08	0.00E+00	4.04E-07	0.00E+00	4.84E-05
Fe-55	1.15E-05	6.10E-06	1.89E-06	0.00E+00	0.00E+00	3.45E-06	1.13E-06
Fe-59	1.65E-05	2.67E-05	1.33E-05	0.00E+00	0.00E+00	7.74E-06	2.78E-05
Co-57	0.00E+00	4.93E-07	9.98E-07	0.00E+00	0.00E+00	0.00E+00	4.04E-06
Co-58	0.00E+00	1.80E-06	5.51E-06	0.00E+00	0.00E+00	0.00E+00	1.05E-05
Co-60	0.00E+00	5.29E-06	1.56E-05	0.00E+00	0.00E+00	0.00E+00	2.93E-05
Ni-63	5.38E-04	2.88E-05	1.83E-05	0.00E+00	0.00E+00	0.00E+00	1.94E-06
Ni-65	2.22E-06	2.09E-07	1.22E-07	0.00E+00	0.00E+00	0.00E+00	2.56E-05
Cu-64	0.00E+00	2.45E-07	1.48E-07	0.00E+00	5.92E-07	0.00E+00	1.15E-05
Zn-65	1.37E-05	3.65E-05	2.27E-05	0.00E+00	2.30E-05	0.00E+00	6.41E-06
Zn-69	4.38E-08	6.33E-08	5.85E-09	0.00E+00	3.84E-08	0.00E+00	3.99E-06
Zn-69m	7.10E-07	1.21E-06	1.43E-07	0.00E+00	7.03E-07	0.00E+00	3.94E-05
Br-82	0.00E+00	0.00E+00	7.55E-06	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Br-83	0.00E+00	0.00E+00	1.71E-07	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Br-84	0.00E+00	0.00E+00	1.98E-07	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Br-85	0.00E+00	0.00E+00	9.12E-09	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Rb-86	0.00E+00	6.70E-05	4.12E-05	0.00E+00	0.00E+00	0.00E+00	4.31E-06
Rb-88	0.00E+00	1.90E-07	1.32E-07	0.00E+00	0.00E+00	0.00E+00	9.32E-09
Rb-89	0.00E+00	1.17E-07	1.04E-07	0.00E+00	0.00E+00	0.00E+00	1.02E-09
Sr-89	1.32E-03	0.00E+00	3.77E-05	0.00E+00	0.00E+00	0.00E+00	5.11E-05
Sr-90	1.70E-02	0.00E+00	4.31E-03	0.00E+00	0.00E+00	0.00E+00	2.29E-04
Sr-91	2.40E-05	0.00E+00	9.06E-07	0.00E+00	0.00E+00	0.00E+00	5.30E-05
Sr-92	9.03E-06	0.00E+00	3.62E-07	0.00E+00	0.00E+00	0.00E+00	1.71E-04
Y-90	4.11E-08	0.00E+00	1.10E-09	0.00E+00	0.00E+00	0.00E+00	1.17E-04
Y-91m	3.82E-10	0.00E+00	1.39E-11	0.00E+00	0.00E+00	0.00E+00	7.48E-07
Y-91	6.02E-07	0.00E+00	1.61E-08	0.00E+00	0.00E+00	0.00E+00	8.02E-05
Y-92	3.60E-09	0.00E+00	1.03E-10	0.00E+00	0.00E+00	0.00E+00	1.04E-04
Y-93	1.14E-08	0.00E+00	3.13E-10	0.00E+00	0.00E+00	0.00E+00	1.70E-04
Zr-95	1.16E-07	2.55E-08	2.27E-08	0.00E+00	3.65E-08	0.00E+00	2.66E-05
Zr-97	6.99E-09	1.01E-09	5.96E-10	0.00E+00	1.45E-09	0.00E+00	1.53E-04
Nb-95	2.25E-08	8.76E-09	6.26E-09	0.00E+00	8.23E-09	0.00E+00	1.62E-05
Nb-97	2.17E-10	3.92E-11	1.83E-11	0.00E+00	4.35E-11	0.00E+00	1.21E-05
Mo-99	0.00E+00	1.33E-05	3.29E-06	0.00E+00	2.84E-05	0.00E+00	1.10E-05
Tc-99m	9.23E-10	1.81E-09	3.00E-08	0.00E+00	2.63E-08	9.19E-10	1.03E-06
Tc-101	1.07E-09	1.12E-09	1.42E-08	0.00E+00	1.91E-08	5.92E-10	3.56E-09
Ru-103	7.31E-07	0.00E+00	2.81E-07	0.00E+00	1.84E-06	0.00E+00	1.89E-05
Ru-105	6.45E-08	0.00E+00	2.34E-08	0.00E+00	5.67E-07	0.00E+00	4.21E-05
Ru-106	1.17E-05	0.00E+00	1.46E-06	0.00E+00	1.58E-05	0.00E+00	1.82E-04
Ag-110m	5.39E-07	3.64E-07	2.91E-07	0.00E+00	6.78E-07	0.00E+00	4.33E-05

Table 6.4 (6 of 8)
INGESTION DOSE FACTORS
(mrem/pCi ingested)

Nuclide	CHILD						
	bone	liver	t body	thyroid	kidney	lung	gi-lli
Sb-124	1.11E-05	1.44E-07	3.89E-06	2.45E-08	0.00E+00	6.16E-06	6.94E-05
Sb-125	7.16E-06	5.52E-08	1.50E-06	6.63E-09	0.00E+00	3.99E-06	1.71E-05
Te-125m	1.14E-05	3.09E-06	1.52E-06	3.20E-06	0.00E+00	0.00E+00	1.10E-05
Te-127m	2.89E-05	7.78E-06	3.43E-06	6.91E-06	8.24E-05	0.00E+00	2.34E-05
Te-127	4.71E-07	1.27E-07	1.01E-07	3.26E-07	1.34E-06	0.00E+00	1.84E-05
Te-129m	4.87E-05	1.36E-05	7.56E-06	1.57E-05	1.43E-04	0.00E+00	5.94E-05
Te-129	1.34E-07	3.74E-08	3.18E-08	9.56E-08	3.92E-07	0.00E+00	8.34E-06
Te-131m	7.20E-06	2.49E-06	2.65E-06	5.12E-06	2.41E-05	0.00E+00	1.01E-04
Te-131	8.30E-08	2.53E-08	2.47E-08	6.35E-08	2.51E-07	0.00E+00	4.36E-07
Te-132	1.01E-05	4.47E-06	5.40E-06	6.51E-06	4.15E-05	0.00E+00	4.50E-05
I-130	2.92E-06	5.90E-06	3.04E-06	6.50E-04	8.82E-06	0.00E+00	2.76E-06
I-131	1.72E-05	1.73E-05	9.83E-06	5.72E-03	2.84E-05	0.00E+00	1.54E-06
I-132	8.00E-07	1.47E-06	6.76E-07	6.82E-05	2.25E-06	0.00E+00	1.73E-06
I-133	5.92E-06	7.32E-06	2.77E-06	1.36E-03	1.22E-05	0.00E+00	2.95E-06
I-134	4.19E-07	7.78E-07	3.58E-07	1.79E-05	1.19E-06	0.00E+00	5.16E-07
I-135	1.75E-06	3.15E-06	1.49E-06	2.79E-04	4.83E-06	0.00E+00	2.40E-06
Cs-134	2.34E-04	3.84E-04	8.10E-05	0.00E+00	1.19E-04	4.27E-05	2.07E-06
Cs-136	2.35E-05	6.46E-05	4.18E-05	0.00E+00	3.44E-05	5.13E-06	2.27E-06
Cs-137	3.27E-04	3.13E-04	4.62E-05	0.00E+00	1.02E-04	3.67E-05	1.96E-06
Cs-138	2.28E-07	3.17E-07	2.01E-07	0.00E+00	2.23E-07	2.40E-08	1.46E-07
Ba-139	4.14E-07	2.21E-10	1.20E-08	0.00E+00	1.93E-10	1.30E-10	2.39E-05
Ba-140	8.31E-05	7.28E-08	4.85E-06	0.00E+00	2.37E-08	4.34E-08	4.21E-05
Ba-141	2.00E-07	1.12E-10	6.51E-09	0.00E+00	9.69E-11	6.58E-10	1.14E-07
Ba-142	8.74E-08	6.29E-11	4.88E-09	0.00E+00	5.09E-11	3.70E-11	1.14E-09
La-140	1.01E-08	3.53E-09	1.19E-09	0.00E+00	0.00E+00	0.00E+00	9.84E-05
La-142	5.24E-10	1.67E-10	5.23E-11	0.00E+00	0.00E+00	0.00E+00	3.31E-05
Ce-141	3.97E-08	1.98E-08	2.94E-09	0.00E+00	8.68E-09	0.00E+00	2.47E-05
Ce-143	6.99E-09	3.79E-06	5.49E-10	0.00E+00	1.59E-09	0.00E+00	5.55E-05
Ce-144	2.08E-06	6.52E-07	1.11E-07	0.00E+00	3.61E-07	0.00E+00	1.70E-04
Pr-143	3.93E-08	1.18E-08	1.95E-09	0.00E+00	6.39E-09	0.00E+00	4.24E-05
Pr-144	1.29E-10	3.99E-11	6.49E-12	0.00E+00	2.11E-11	0.00E+00	8.59E-08
Nd-147	2.79E-08	2.26E-08	1.75E-09	0.00E+00	1.24E-08	0.00E+00	3.58E-05
W-187	4.29E-07	2.54E-07	1.14E-07	0.00E+00	0.00E+00	0.00E+00	3.57E-05
Np-239	5.25E-09	3.77E-10	2.65E-10	0.00E+00	1.09E-09	0.00E+00	2.79E-05

References:

Dose Factors for Co-57, Zn-69m, Br-82, Nb-97, Sb-124 and Sb-125 are from NUREG-0172 Age Specific Radiation Dose Commitment Factors for a One Year Chronic Intake, November, 1977, Table 2.

All others:

Regulatory Guide 1.109, Table E-13.

NOTE: The tritium dose factor for bone is assumed to be equal to the total body dose factor.

Table 6.4 (7 of 8)
INGESTION DOSE FACTORS
(mrem/pCi ingested)

Nuclide	INFANT						
	bone	liver	t body	thyroid	kidney	lung	gi-lli
H-3	3.08E-07	3.08E-07	3.08E-07	3.08E-07	3.08E-07	3.08E-07	3.08E-07
C-14	2.37E-05	5.06E-06	5.06E-06	5.06E-06	5.06E-06	5.06E-06	5.06E-06
Na-24	1.01E-05	1.01E-05	1.01E-05	1.01E-05	1.01E-05	1.01E-05	1.01E-05
P-32	1.70E-03	1.00E-04	6.59E-05	0.00E+00	0.00E+00	0.00E+00	2.30E-05
Cr-51	0.00E+00	0.00E+00	1.41E-08	9.20E-09	2.01E-09	1.79E-08	4.11E-07
Mn-54	0.00E+00	1.99E-05	4.51E-06	0.00E+00	4.41E-06	0.00E+00	7.31E-06
Mn-56	0.00E+00	8.18E-07	1.41E-07	0.00E+00	7.03E-07	0.00E+00	7.43E-05
Fe-55	1.39E-05	8.98E-06	2.40E-06	0.00E+00	0.00E+00	4.39E-06	1.14E-06
Fe-59	3.08E-05	5.38E-05	2.12E-05	0.00E+00	0.00E+00	1.59E-05	2.57E-05
Co-57	0.00E+00	1.15E-06	1.87E-06	0.00E+00	0.00E+00	0.00E+00	3.92E-06
Co-58	0.00E+00	3.60E-06	8.98E-06	0.00E+00	0.00E+00	0.00E+00	8.97E-06
Co-60	0.00E+00	1.08E-05	2.55E-05	0.00E+00	0.00E+00	0.00E+00	2.57E-05
Ni-63	6.34E-04	3.92E-05	2.20E-05	0.00E+00	0.00E+00	0.00E+00	1.95E-06
Ni-65	4.70E-06	5.32E-07	2.42E-07	0.00E+00	0.00E+00	0.00E+00	4.05E-05
Cu-64	0.00E+00	6.09E-07	2.82E-07	0.00E+00	1.03E-06	0.00E+00	1.25E-05
Zn-65	1.84E-05	6.31E-05	2.91E-05	0.00E+00	3.06E-05	0.00E+00	5.33E-05
Zn-69	9.33E-08	1.68E-07	1.25E-08	0.00E+00	6.98E-08	0.00E+00	1.37E-05
Zn-69m	1.50E-06	3.06E-06	2.79E-07	0.00E+00	1.24E-06	0.00E+00	4.24E-05
Br-82	0.00E+00	0.00E+00	1.27E-05	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Br-83	0.00E+00	0.00E+00	3.63E-07	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Br-84	0.00E+00	0.00E+00	3.82E-07	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Br-85	0.00E+00	0.00E+00	1.94E-08	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Rb-86	0.00E+00	1.70E-04	8.40E-05	0.00E+00	0.00E+00	0.00E+00	4.35E-06
Rb-88	0.00E+00	4.98E-07	2.73E-07	0.00E+00	0.00E+00	0.00E+00	4.85E-07
Rb-89	0.00E+00	2.86E-07	1.97E-07	0.00E+00	0.00E+00	0.00E+00	9.74E-08
Sr-89	2.51E-03	0.00E+00	7.20E-05	0.00E+00	0.00E+00	0.00E+00	5.16E-05
Sr-90	1.85E-02	0.00E+00	4.71E-03	0.00E+00	0.00E+00	0.00E+00	2.31E-04
Sr-91	5.00E-05	0.00E+00	1.81E-06	0.00E+00	0.00E+00	0.00E+00	5.92E-05
Sr-92	1.92E-05	0.00E+00	7.13E-07	0.00E+00	0.00E+00	0.00E+00	2.07E-04
Y-90	8.69E-08	0.00E+00	2.33E-09	0.00E+00	0.00E+00	0.00E+00	1.20E-04
Y-91m	8.10E-10	0.00E+00	2.76E-11	0.00E+00	0.00E+00	0.00E+00	2.70E-06
Y-91	1.13E-06	0.00E+00	3.01E-08	0.00E+00	0.00E+00	0.00E+00	8.10E-05
Y-92	7.65E-09	0.00E+00	2.15E-10	0.00E+00	0.00E+00	0.00E+00	1.46E-04
Y-93	2.43E-08	0.00E+00	6.62E-10	0.00E+00	0.00E+00	0.00E+00	1.92E-04
Zr-95	2.06E-07	5.02E-08	3.56E-08	0.00E+00	5.41E-08	0.00E+00	2.50E-05
Zr-97	1.48E-08	2.54E-09	1.16E-09	0.00E+00	2.56E-09	0.00E+00	1.62E-04
Nb-95	4.20E-08	1.73E-08	1.00E-08	0.00E+00	1.24E-08	0.00E+00	1.46E-05
Nb-97	4.59E-10	9.79E-11	3.53E-11	0.00E+00	7.65E-11	0.00E+00	3.09E-05
Mo-99	0.00E+00	3.40E-05	6.63E-06	0.00E+00	5.08E-05	0.00E+00	1.12E-05
Tc-99m	1.92E-09	3.96E-09	5.10E-08	0.00E+00	4.26E-08	2.07E-09	1.15E-06
Tc-101	2.27E-09	2.86E-09	2.83E-08	0.00E+00	3.40E-08	1.56E-09	4.86E-07
Ru-103	1.48E-06	0.00E+00	4.95E-07	0.00E+00	3.08E-06	0.00E+00	1.80E-05
Ru-105	1.36E-07	0.00E+00	4.58E-08	0.00E+00	1.00E-06	0.00E+00	5.41E-05
Ru-106	2.41E-05	0.00E+00	3.01E-06	0.00E+00	2.85E-05	0.00E+00	1.83E-04
Ag-110m	9.96E-07	7.27E-07	4.81E-07	0.00E+00	1.04E-06	0.00E+00	3.77E-05

Table 6.4 (8 of 8)
INGESTION DOSE FACTORS
(mrem/pCi ingested)

Nuclide	INFANT						
	bone	liver	t body	thyroid	kidney	lung	gi-lli
Sb-124	2.14E-05	3.15E-07	6.63E-06	5.68E-08	0.00E+00	1.34E-05	6.60E-05
Sb-125	1.23E-05	1.19E-07	2.53E-06	1.54E-08	0.00E+00	7.72E-06	1.64E-05
Te-125m	2.33E-05	7.79E-06	3.15E-06	7.84E-06	0.00E+00	0.00E+00	1.11E-05
Te-127m	5.85E-05	1.94E-05	7.08E-06	1.69E-05	1.44E-04	0.00E+00	2.36E-05
Te-127	1.00E-06	3.35E-07	2.15E-07	8.14E-07	2.44E-06	0.00E+00	2.10E-05
Te-129m	1.00E-04	3.43E-05	1.54E-05	3.84E-05	2.50E-04	0.00E+00	5.97E-05
Te-129	2.84E-07	9.79E-08	6.63E-08	2.38E-07	7.07E-07	0.00E+00	2.27E-05
Te-131m	1.52E-05	6.12E-06	5.05E-06	1.24E-05	4.21E-05	0.00E+00	1.03E-04
Te-131	1.76E-07	6.50E-08	4.94E-08	1.57E-07	4.50E-07	0.00E+00	7.11E-06
Te-132	2.08E-05	1.03E-05	9.61E-06	1.52E-05	6.44E-05	0.00E+00	3.81E-05
I-130	6.00E-06	1.32E-05	5.30E-06	1.48E-03	1.45E-05	0.00E+00	2.83E-06
I-131	3.59E-05	4.23E-05	1.86E-05	1.39E-02	4.94E-05	0.00E+00	1.51E-06
I-132	1.66E-06	3.37E-06	1.20E-06	1.58E-04	3.76E-06	0.00E+00	2.73E-06
I-133	1.25E-05	1.82E-05	5.33E-06	3.31E-03	2.14E-05	0.00E+00	3.08E-06
I-134	8.69E-07	1.78E-06	6.33E-07	4.15E-05	1.99E-06	0.00E+00	1.84E-06
I-135	3.64E-06	7.24E-06	2.64E-06	6.49E-04	8.07E-06	0.00E+00	2.62E-06
Cs-134	3.77E-04	7.03E-04	7.10E-05	0.00E+00	1.81E-04	7.42E-05	1.91E-06
Cs-136	4.59E-05	1.35E-04	5.04E-05	0.00E+00	5.38E-05	1.10E-05	2.05E-06
Cs-137	5.22E-04	6.11E-04	4.33E-05	0.00E+00	1.64E-04	6.64E-05	1.91E-06
Cs-138	4.81E-07	7.82E-07	3.79E-07	0.00E+00	3.90E-07	6.09E-08	1.25E-06
Ba-139	8.81E-07	5.84E-10	2.55E-08	0.00E+00	3.51E-10	3.54E-10	5.58E-05
Ba-140	1.71E-04	1.71E-07	8.81E-06	0.00E+00	4.06E-08	1.05E-07	4.20E-05
Ba-141	4.25E-07	2.91E-10	1.34E-08	0.00E+00	1.75E-10	1.77E-10	5.19E-06
Ba-142	1.84E-07	1.53E-10	9.06E-09	0.00E+00	8.81E-11	9.26E-11	7.59E-07
La-140	2.11E-08	8.32E-09	2.14E-09	0.00E+00	0.00E+00	0.00E+00	9.77E-05
La-142	1.10E-09	4.04E-10	9.67E-11	0.00E+00	0.00E+00	0.00E+00	6.86E-05
Ce-141	7.87E-08	4.80E-08	5.65E-09	0.00E+00	1.48E-08	0.00E+00	2.48E-05
Ce-143	1.48E-08	9.82E-06	1.12E-09	0.00E+00	2.86E-09	0.00E+00	5.73E-05
Ce-144	2.98E-06	1.22E-06	1.67E-07	0.00E+00	4.93E-07	0.00E+00	1.71E-04
Pr-143	8.13E-08	3.04E-08	4.03E-09	0.00E+00	1.13E-08	0.00E+00	4.29E-05
Pr-144	2.74E-10	1.06E-10	1.38E-11	0.00E+00	3.84E-11	0.00E+00	4.93E-06
Nd-147	5.53E-08	5.68E-08	3.48E-09	0.00E+00	2.19E-08	0.00E+00	3.60E-05
W-187	9.03E-07	6.28E-07	2.17E-07	0.00E+00	0.00E+00	0.00E+00	3.69E-05
Np-239	1.11E-08	9.93E-10	5.61E-10	0.00E+00	1.98E-09	0.00E+00	2.87E-05

References:

Dose Factors for Co-57, Zn-69m, Br-82, Nb-97, Sb-124 and Sb-125 are from NUREG-0172 Age Specific Radiation Dose Commitment Factors for a One Year Chronic Intake, November, 1977, Table 1.

All others:

Regulatory Guide 1.109, Table E-14.

NOTE: The tritium dose factor for bone is assumed to be equal to the total body dose factor.

Table 6.5
BIOACCUMULATION FACTORS FOR FRESHWATER FISH
(pCi/kg per pCi/L)

H-3	9.0E-01	Tc-99m	1.5E+01
C-14	4.6E+03	Tc-101	1.5E+01
Na-24	1.0E+02	Ru-103	1.0E+01
P-32	1.0E+05	Ru-105	1.0E+01
Cr-51	2.0E+02	Ru-106	1.0E+01
Mn-54	4.0E+02	Ag-110m	0.0E+00
Mn-56	4.0E+02	Sb-124	1.0E+00
Fe-55	1.0E+02	Sb-125	1.0E+00
Fe-59	1.0E+02	Te-125m	4.0E+02
Co-57	5.0E+01	Te-127m	4.0E+02
Co-58	5.0E+01	Te-127	4.0E+02
Co-60	5.0E+01	Te-129m	4.0E+02
Ni-63	1.0E+02	Te-129	4.0E+02
Ni-65	1.0E+02	Te-131m	4.0E+02
Cu-64	5.0E+01	Te-131	4.0E+02
Zn-65	2.0E+03	Te-132	4.0E+02
Zn-69	2.0E+03	I-130	4.0E+01
Zn-69m	2.0E+03	I-131	4.0E+01
Br-82	4.2E+02	I-132	4.0E+01
Br-83	4.2E+02	I-133	4.0E+01
Br-84	4.2E+02	I-134	4.0E+01
Br-85	4.2E+02	I-135	4.0E+01
Rb-86	2.0E+03	Cs-134	1.9E+03
Rb-88	2.0E+03	Cs-136	1.9E+03
Rb-89	2.0E+03	Cs-137	1.9E+03
Sr-89	5.6E+01	Cs-138	1.9E+03
Sr-90	5.6E+01	Ba-139	4.0E+00
Sr-91	5.6E+01	Ba-140	4.0E+00
Sr-92	5.6E+01	Ba-141	4.0E+00
Y-90	2.5E+01	Ba-142	4.0E+00
Y-91m	2.5E+01	La-140	2.5E+01
Y-91	2.5E+01	La-142	2.5E+01
Y-92	2.5E+01	Ce-141	1.0E+00
Y-93	2.5E+01	Ce-143	1.0E+00
Zr-95	3.3E+00	Ce-144	1.0E+00
Zr-97	3.3E+00	Pr-143	2.5E+01
Nb-95	3.0E+04	Pr-144	2.5E+01
Nb-97	3.0E+04	Nd-147	2.5E+01
Mo-99	1.0E+01	W-187	1.2E+03
		Np-239	1.0E+01

References:

Bioaccumulation factors for Antimony nuclides are from ORNL-4992, "A Methodology for Calculating Radiation Doses from Radioactivity Released to the Environment, March 1976, Table 4.12A.

Bioaccumulation factors for Iodine, Cesium, and Strontium nuclides are from NUREG/CR-1004, Table 3.2.4.

All other nuclides' bioaccumulation factors are from Regulatory Guide 1.109, Table A-1.

Table 6.6 (1 of 2)
EXTERNAL DOSE FACTORS FOR STANDING ON CONTAMINATED GROUND
(mrem/h per pCi/m²)

Nuclide	Total Body	Skin
H-3	0.0	0.0
C-14	0.0	0.0
Na-24	2.50E-08	2.90E-08
P-32	0.0	0.0
Cr-51	2.20E-10	2.60E-10
Mn-54	5.80E-09	6.80E-09
Mn-56	1.10E-08	1.30E-08
Fe-55	0.0	0.0
Fe-59	8.00E-09	9.40E-09
Co-57	1.77E-09	2.21E-09
Co-58	7.00E-09	8.20E-09
Co-60	1.70E-08	2.00E-08
Ni-63	0.0	0.0
Ni-65	3.70E-09	4.30E-09
Cu-64	1.50E-09	1.70E-09
Zn-65	4.00E-09	4.60E-09
Zn-69	0.0	0.0
Zn-69m	5.50E-09	6.59E-09
Br-82	3.18E-08	3.90E-08
Br-83	6.40E-11	9.30E-11
Br-84	1.20E-08	1.40E-08
Br-85	0.0	0.0
Rb-86	6.30E-10	7.20E-10
Rb-88	3.50E-09	4.00E-09
Rb-89	1.50E-08	1.80E-08
Sr-89	5.60E-13	6.50E-13
Sr-91	7.10E-09	8.30E-09
Sr-92	9.00E-09	1.00E-08
Y-90	2.20E-12	2.60E-12
Y-91m	3.80E-09	4.40E-09
Y-91	2.40E-11	2.70E-11
Y-92	1.60E-09	1.90E-09
Y-93	5.70E-10	7.80E-10
Zr-95	5.00E-09	5.80E-09
Zr-97	5.50E-09	6.40E-09
Nb-95	5.10E-09	6.00E-09
Nb-97	8.11E-09	1.00E-08
Mo-99	1.90E-09	2.20E-09
Tc-99m	9.60E-10	1.10E-09
Tc-101	2.70E-09	3.00E-09
Ru-103	3.60E-09	4.20E-09
Ru-105	4.50E-09	5.10E-09
Ru-106	1.50E-09	1.80E-09
Ag-110m	1.80E-08	2.10E-08
Sb-124	2.17E-08	2.57E-08

Table 6.6 (2 of 2)
EXTERNAL DOSE FACTORS FOR STANDING ON CONTAMINATED GROUND
(mrem/h per pCi/m²)

Nuclide	Total Body	Skin
Sb-125	5.48E-09	6.80E-09
Te-125m	3.50E-11	4.80E-11
Te-127m	1.10E-12	1.30E-12
Te-127	1.00E-11	1.10E-11
Te-129m	7.70E-10	9.00E-10
Te-129	7.10E-10	8.40E-10
Te-131m	8.40E-09	9.90E-09
Te-131	2.20E-09	2.60E-06
Te-132	1.70E-09	2.00E-09
I-130	1.40E-08	1.70E-08
I-131	2.80E-09	3.40E-09
I-132	1.70E-08	2.00E-08
I-133	3.70E-09	4.50E-09
I-134	1.60E-08	1.90E-08
I-135	1.20E-08	1.40E-08
Cs-134	1.20E-08	1.40E-08
Cs-136	1.50E-08	1.70E-08
Cs-137	4.20E-09	4.90E-09
Cs-138	2.10E-08	2.40E-08
Ba-139	2.40E-09	2.70E-09
Ba-140	2.10E-09	2.40E-09
Ba-141	4.30E-09	4.90E-09
Ba-142	7.90E-09	9.00E-09
La-140	1.50E-08	1.70E-08
La-142	1.50E-08	1.80E-08
Ce-141	5.50E-10	6.20E-10
Ce-143	2.20E-09	2.50E-09
Ce-144	3.20E-10	3.70E-10
Pr-143	0.0	0.0
Pr-144	2.00E-10	2.30E-10
Nd-147	1.00E-09	1.20E-09
W-187	3.10E-09	3.60E-09
Np-239	9.50E-10	1.10E-09

References:

Dose Factors for Co-57, Zn-69m, Br-82, Nb-97, Sb-124 and Sb-125 are from Dose-Rate Conversion Factors for External Exposure to Photon and Electron Radiation from Radionuclides Occurring in Routine Releases from Nuclear Fuel Cycle Facilities, D. C. Kocher, Health Physics Volume 38, April 1980.

All Others:

Regulatory Guide 1.109, Table E-6.

Figure 6.1
LIQUID RELEASE POINTS


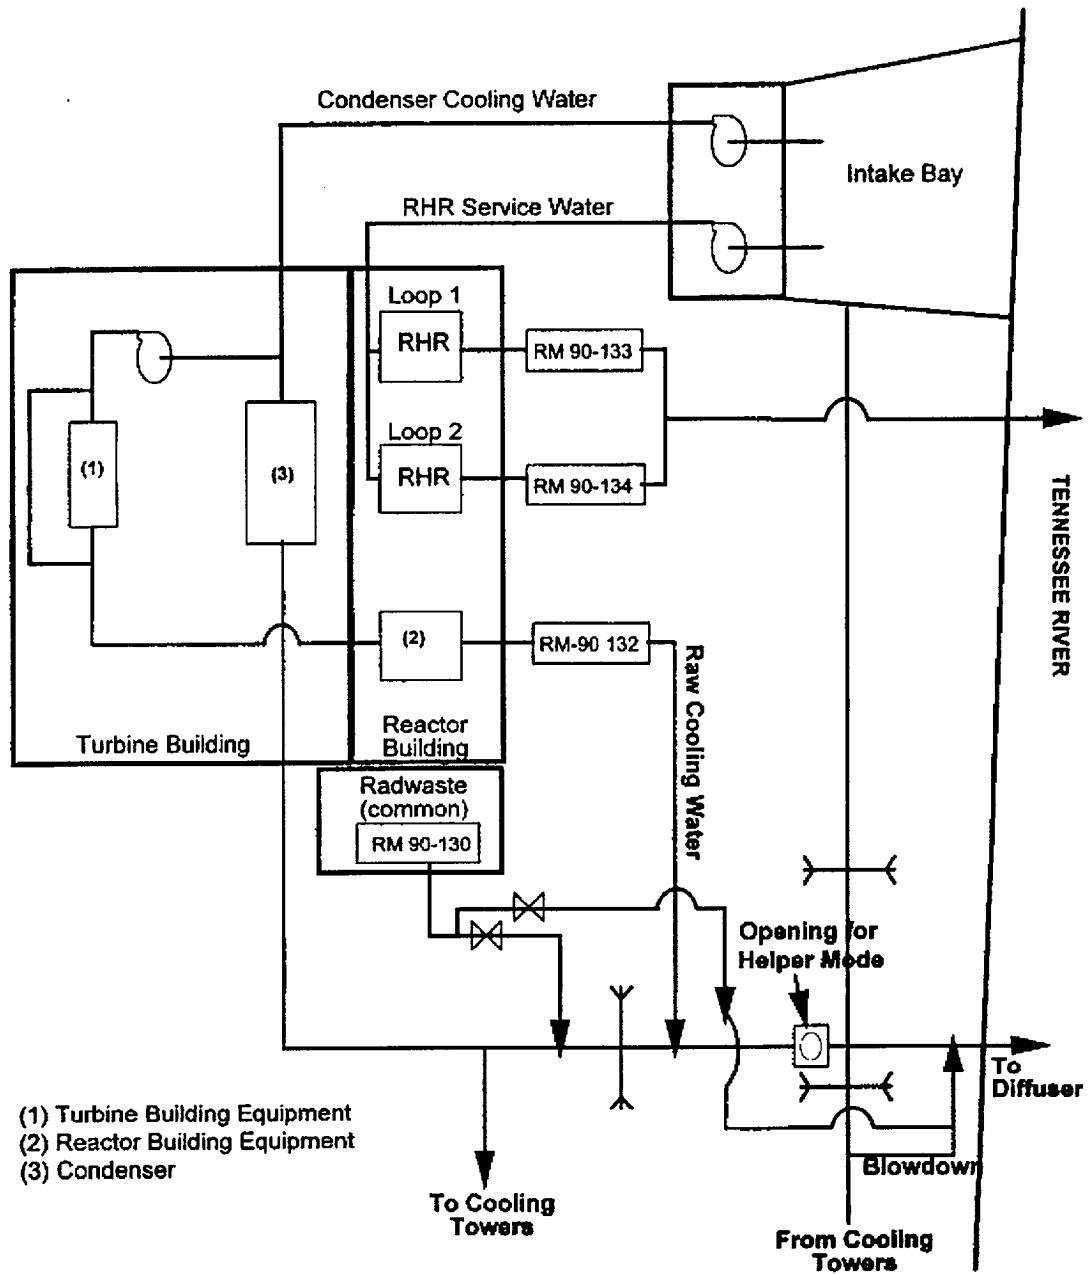


Figure 6.2
LIQUID RADWASTE SYSTEM

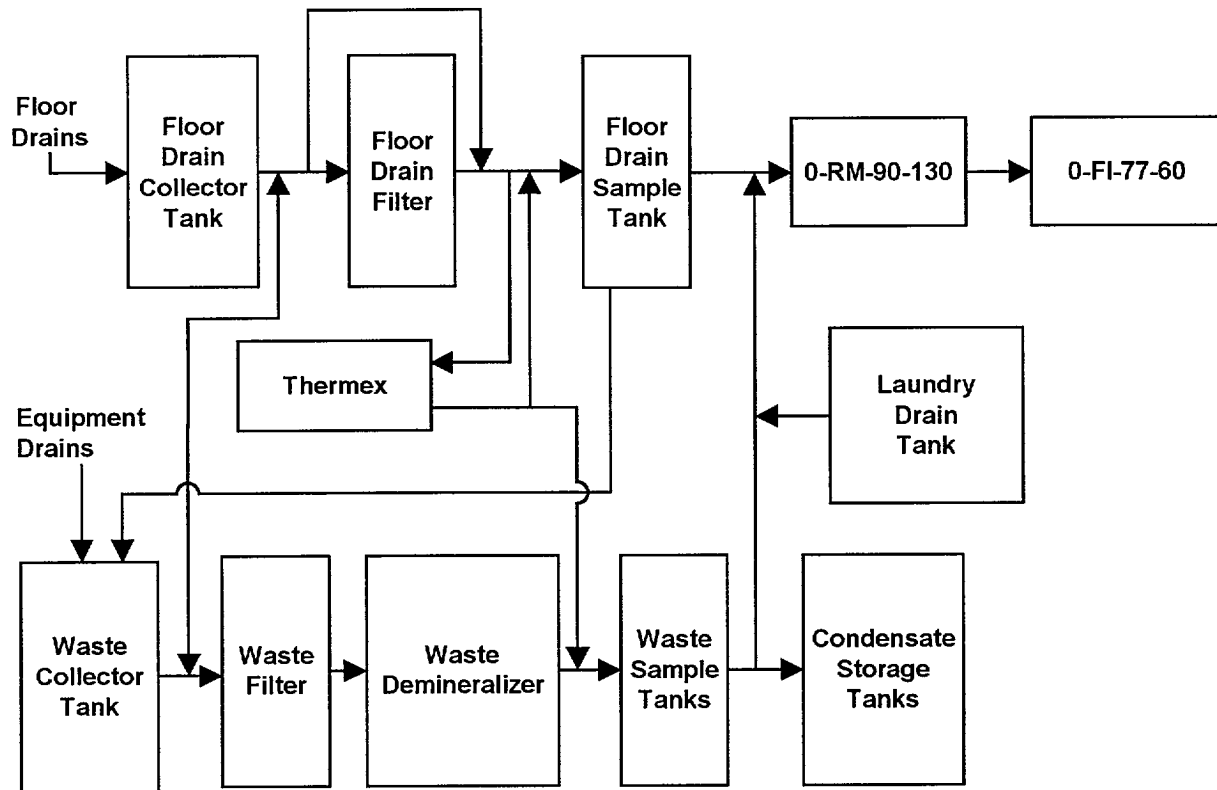

SECTION 7.0

GASEOUS EFFLUENTS

7.0 GASEOUS EFFLUENTS

RELEASE POINTS DESCRIPTION

There are eleven monitored discharge points at BFN: a Reactor Building Exhaust for each unit, the Radwaste Building Exhaust, two sets of Turbine Deck Roof Fans for each unit, and the Stack. The Reactor and Radwaste Exhausts are located on the roof of the reactor building.

The Reactor Building Exhausts include exhaust from the refuel floor of the reactor buildings, exhaust from the Primary Containment Purge System, and exhaust from the turbine buildings. These discharge points are monitored by radiation monitors 1-,2-,3-RM-90-250.

The Radwaste Building Exhaust includes exhaust from the common radwaste building. This discharge point is monitored by radiation monitor RM-90-252.

There are nine roof fans on the roof of each unit's turbine building to provide building ventilation. These are generally used in the warmer months to control building temperature. For each unit, there are two radiation monitors. One of these monitors the exhaust through four of the fans (1-,2-RM-90-249 and 3-RM-90-251). The other monitors the exhaust through the remaining five fans (1-,2-RM-90-251 and 3-RM-90-249).

The common 600 foot plant stack receives the Condenser Offgas exhaust, the Filter Cubicle exhaust, the Steam Packing and Mechanical Vacuum exhaust, and the Standby Gas Treatment System (SBGTS) exhaust. The stack effluents are monitored by radiation monitors RM-90-147 and 148.

Figures 7.1 and 7.2 show the Offgas System, the Standby Gas Treatment System and normal building ventilation with effluent monitor locations.

7.1 GASEOUS EFFLUENT MONITOR INSTRUMENT SETPOINTS

ODCM Control 1.1.2 requires that gaseous effluent monitors have alarm/trip setpoints to ensure that ODCM dose rate limits are not exceeded. This section of the ODCM describes the methodology that is used to determine the allowable values which are used to calculate the physical settings on the monitors. The monitor setpoints are calculated in the applicable Scaling and Setpoint Document. Figures 7.1 and 7.2 show the Offgas System, the Standby Gas Treatment System and normal building ventilation with the effluent monitor locations.

All gaseous releases from BFN are continuous, so allowable values are calculated for each of the monitors as a part of a release permit package per sampling requirements of Table 2.2-2. Using the actual radionuclide mix as measured in a sample, a maximum allowable value is calculated (as described below) and compared to a default allowable value assigned to that monitor. The default allowable values are described in Section 7.1.2. The lower of the two values is the recommended setpoint for that release point. If the release point is one of several leading into a common discharge point, all current releases into that discharge point are used in the calculation of the discharge point monitor allowable value (e.g., the stack).

7.1.1 Maximum Allowable Value

An expected monitor response is calculated from the sample results:

$$R = B + \sum_i E_i C_i \quad (7.1)$$

where:

- B = monitor background, cpm or cps.
- E_i = efficiency factor for the monitor for nuclide i , cpm per $\mu\text{Ci/cc}$ or cps per $\mu\text{Ci/cc}$.
- C_i = measured concentration of nuclide i , $\mu\text{Ci/cc}$.

The expected response is then used to determine the calculated maximum allowable value, S_{max} in cpm or cps. This value corresponds to the dose rate limit for the measured radionuclide mix and is determined using the following equation:

$$S_{\text{max}} = (A SF \left(\frac{DR_{\text{lim}}}{DR} (R - B) \right)) + B \quad (7.2)$$

where:

- A = dose rate allocation factor for the release/discharge point, dimensionless. The dose rate allocation factor for the stack is 0.1, the building vent allocation factors are equal to 0.9 times the fraction of the total building flow assigned to that particular vent.

- SF = safety factor for the monitor, dimensionless.
DR_{lim} = the dose rate limit, mrem/y.
= 500 mrem/y to the total body for noble gases,
= 3000 mrem/y to the skin for noble gases, and
DR = the calculated dose rate for the release, mrem/y.
= DR_{TB} for total body (as described in Section 7.3.2.1),
= DR_S for skin (as described in Section 7.3.2.2), and
R = expected monitor response (as calculated above) cpm or cps.
B = the monitor background, cpm or cps.

7.1.2 Default Allowable Values

The methodology for determining the default alarm/trip allowable values is divided into two major parts. The first consists of backcalculating from a dose rate to a release rate limit, in $\mu\text{Ci/s}$, for each release point. The methodology for determining these release rate limits is given in Section 7.2. The second part consists of using the release rate limits to determine default allowable values for the monitors.

The default allowable values are calculated using the following equation.

$$\text{Allowable Value} \leq \frac{r f A}{F E} + B \quad (7.3)$$

where:

- r = release rate limit for stack or ground level, $\mu\text{Ci/s}$. The release rate limits used for the allowable value calculation are $1.44\text{E}+07$ $\mu\text{Ci/s}$ for the stack and $1.50\text{E}+05$ $\mu\text{Ci/s}$ for the building vents.
f = fraction of the limits r which is allowed for the release mode (elevated or ground level).
NOTE: The sum of the f values for elevated and ground levels must be less than or equal to 1. This lowers the limits to ensure that the site dose rate limit will not be exceeded if both the stack and the ground level release rate limits were reached simultaneously.
A = allocation factor. This is the portion of the release rate limit r which is assigned to the release point under consideration. This ensures that the ground level release rate limit will not be exceeded if all building vents were to reach their limit simultaneously. This is equal to 1 for the stack. The building vent release rate limit is divided among the ten vents based on the flow rates.
F = flow rate for the vent, cc/s. Maximum flow rates are used to ensure conservative setpoints.
E = efficiency of the monitor, $(\mu\text{Ci/cc})/\text{cpm}$ or $(\mu\text{Ci/cc})/\text{cps}$.
B = background of the monitor, cpm or cps.

The calculation of these setpoints are documented further in 0-TI-15 and the applicable Scaling and Setpoint Document, including the numerical values for each of the parameters described above.

7.2 RELEASE RATE LIMIT METHODOLOGY

A dose rate (D_{TB} , D_S or D_{TH}) is calculated based on the design objective source term mix used in the licensing of the plant. Dose rates are determined for (1) noble gases as described in Section 7.3.2 and (2) iodines and particulates as described in Section 7.3.3.

The dose rate limits of interest are:

$$\begin{aligned} \text{Total Body} &= 500 \text{ mrem/y} \\ \text{Skin} &= 3000 \text{ mrem/y} \\ \text{Maximum Organ} &= 1500 \text{ mrem/y} \end{aligned}$$

A release rate limit based on organ dose rates is not considered since iodine and particulate releases are not determined on a real time basis. The total body and skin dose rate limits are divided by the corresponding calculated dose rates described above:

$$R_{TB}(\text{vent or stack}) = \frac{\text{Total Body Dose Rate Limit}}{D_{TB}(\text{vent or stack})}$$

$$R_S(\text{vent or stack}) = \frac{\text{Skin Dose Rate Limit}}{D_S(\text{vent or stack})}$$

These ratios represent how far above or below the guidelines the dose rate calculations were.

A total release rate, Q , for each release level (building vent or stack) is calculated, using the source term data in Table 7.2. Thus, two total release rates are calculated:

$$\begin{aligned} Q_{ngv} &= \text{Total noble gas release rate from building exhaust vents, Ci/s.} \\ Q_{ngs} &= \text{Total noble gas release rate from main stack, Ci/s.} \end{aligned}$$

To obtain a release rate limit, r , for each release level, the total release rate, Q , for that release level is multiplied by the corresponding ratio, R :

For noble gases released from building vents:

$$\begin{aligned} r_{ngv} &= R_{TBv} Q_{ngv}, \quad \text{or} \\ &= R_{Sv} Q_{ngv} \end{aligned}$$

whichever is more restrictive, i.e., smaller.

where:

r_{ngv} = Calculated release rate limit for noble gases released from building vents.

R_{TBV} = Ratio of total body dose rate limit to total body dose rate for building vent releases, as calculated above.

Q_{ngv} = Total Table 7.2 noble gas release rate from building vents.

R_{SV} = Ratio of skin dose rate limit to skin dose rate for building vent releases, as calculated above.

For noble gases released from the stack:

$$r_{ngs} = R_{TBS} Q_{ngs}, \quad \text{or} \\ = R_{SS} Q_{ngs}$$

whichever is more restrictive, i.e., smaller.

where:

r_{ngs} = Calculated release rate limit for noble gases released from the stack.

R_{TBS} = Ratio of total body dose rate limit to total body dose rate for stack releases, as calculated above.

Q_{ngs} = Total Table 7.2 noble gas release rate from stack.

R_{SS} = Ratio of skin dose rate limit to skin dose rate for stack releases, as calculated above.

The release rate limits, r , calculated for BFN using this methodology are:

	<u>Noble Gas</u>
Stack	$r_{ngs} = 1.44E+01 \text{ Ci/s}$
Building Vents	$r_{ngv} = 1.50E-01 \text{ Ci/s}$

7.3 GASEOUS EFFLUENTS - DOSE RATES

7.3.1 RELEASE SAMPLING

As required by Table 2.2-2, a grab sample is taken and analyzed to determine the concentration, $\mu\text{Ci}/\text{cc}$, of each noble gas nuclide. On at least a weekly basis, filters are analyzed to determine the amount of iodines and particulates released. Composite samples are maintained (as required by Table 2.2-2) to determine the concentration of certain nuclides (e.g., Sr-89, Sr-90, and alpha emitters).

7.3.2 NOBLE GAS DOSE RATES

Dose rates are calculated in order to determine compliance with the requirements of ODCM Control 1.2.2.1. Dose rates are calculated for total body and skin due to noble gases using semi-infinite and finite cloud models as described in NUREG 0133. The release mode will determine the model used: turbine building releases are treated as ground level and use the semi-infinite model; reactor and radwaste building vents are treated as split-level (or mixed mode) and use the semi-infinite model; and stack releases are elevated and use the finite cloud model.

7.3.2.1 Total Body Dose Rate

The dose rate to the total body, DR_{TB} in mrem/y , is calculated using the following equation:

$$DR_{\text{TB}} = \sum_i [V_i Q_{is} + \text{DFB}_i ((\chi/Q)_g Q_{ig}) + \text{DFB}_i ((\chi/Q)_m Q_{im})] \quad (7.4)$$

where:

- V_i = the constant for each identified noble gas radionuclide accounting for the gamma radiation from the elevated finite plume, in mrem/y per $\mu\text{Ci}/\text{s}$, as given in Table 7.4
- Q_{is} = the release rate of radionuclide i , in gaseous effluents from the stack, $\mu\text{Ci}/\text{s}$.
- DFB_i = total body submersion dose factor due to gamma radiation for noble gas nuclide i , mrem/y per $\mu\text{Ci}/\text{m}^3$ (Table 7.4).
- χ/Q_g = for ground level releases, the highest calculated annual average relative concentration for any area at or beyond the unrestricted area boundary, s/m^3 (Table 7.1).
- Q_{ig} = the release rate of radionuclide i , in the gaseous effluents from all ground level releases, $\mu\text{Ci}/\text{s}$.
- χ/Q_m = for split-level releases, the highest calculated annual average relative concentration for any area at or beyond the unrestricted area boundary, s/m^3 (Table 7.1).
- Q_{im} = the release rate of radionuclide i , in gaseous effluents from all split level releases, $\mu\text{Ci}/\text{s}$.

7.3.2.2 Skin Dose Rate

The dose rate to the skin, DR_S in mrem/y, is calculated using the following equation:

$$DR_S = \sum_i [(DFS_i \chi/Q_S + 1.1 B_i) Q_{is} + ((DFS_i + 1.1 DF_{\gamma i}) \chi/Q_g Q_{ig}) + ((DFS_i + 1.1 DF_{\gamma i}) \chi/Q_m Q_{im})] \quad (7.5)$$

where:

- DFS_i = the skin dose factor due to beta emissions for each identified noble gas radionuclide, mrem/y per $\mu\text{Ci}/\text{m}^3$.
- χ/Q_S = for stack releases, the highest calculated annual average relative concentration for any area at or beyond the unrestricted area boundary, s/m^3 (Table 7.1).
- B_i = the constant for long term releases (greater than 500 h/y) for each identified noble gas radionuclide accounting for the gamma radiation from the elevated finite plume, mrad/y per $\mu\text{Ci}/\text{s}$ (Table 7.4).
- Q_{is} = the release rate of radionuclide i , in gaseous effluents from the stack, $\mu\text{Ci}/\text{s}$.
- $DF_{\gamma i}$ = the air dose factor due to gamma emissions for each identified noble gas radionuclide, mrad/y per $\mu\text{Ci}/\text{m}^3$ (unit conversion factor of 1.1 mrem/mrad converts air dose to skin dose) (Table 7.4).
- χ/Q_g = for ground level releases, the highest calculated annual average relative concentration for any area at or beyond the unrestricted area boundary, s/m^3 (Table 7.1).
- Q_{ig} = the release rate of radionuclide i , in gaseous effluents from all ground level releases, $\mu\text{Ci}/\text{s}$.
- χ/Q_m = for split level releases, the highest calculated annual average relative concentration for any area at or beyond the unrestricted area boundary, s/m^3 (Table 7.1).
- Q_{im} = the release rate of radionuclide i , in gaseous effluents from all split level releases, $\mu\text{Ci}/\text{s}$.

7.3.3 I-131, I-133, TRITIUM AND ALL RADIONUCLIDES IN PARTICULATE FORM WITH HALF-LIVES OF GREATER THAN 8 DAYS - ORGAN DOSE RATE

Organ dose rates due to I-131, I-133, Tritium and all radionuclides in particulate form with half-lives of greater than 8 days, DR_j in mrem/y, are calculated for all age groups (adult, teen, child, and infant) and all organs (bone, liver, total body, thyroid, kidney, lung, and GI Tract) using the following equation:

$$DR_j = \sum_D F_D [C_{TD}(\chi/Q)_D [R_{IT}+R_{CTP}] + \sum_i C_{iD} [(\chi/Q)_D R_{Ii} + (D/Q)_D [R_{Cpi}+R_{Gi}]]] \quad (7.6)$$

where:

- F_D = flowrate of effluent stream from discharge point D, cc/s.
- C_{TD} = concentration of tritium in effluent stream at discharge point D, $\mu\text{Ci/cc}$.
- χ/Q_D = the highest calculated annual average relative concentration for any area at or beyond the unrestricted area boundary for the release mode associated with the discharge point D, s/m^3 , (Table 7.1).
- R_{IT} = inhalation dose factor for tritium, mrem/y per $\mu\text{Ci/m}^3$. Dose factor is calculated as described in Section 7.8.13 (where: $R_{Ii} = R_{IT}$, i.e., $i=T$ for tritium).
- R_{CTP} = grass-cow-milk dose factor for tritium, mrem/y per $\mu\text{Ci/m}^3$. Dose factor is calculated as described in Section 7.8.7.
- C_{iD} = concentration of nuclide i in effluent stream at discharge point D, $\mu\text{Ci/cc}$.
- R_{Ii} = inhalation dose factor for each identified nuclide i, mrem/y per $\mu\text{Ci/m}^3$. Dose factors are calculated as described in Section 7.8.13.
- D/Q_D = the highest calculated annual average relative deposition for any area at or beyond the unrestricted area boundary for the release mode associated with discharge point D, m^{-2} , (Table 7.1).
- R_{Cpi} = grass-cow-milk dose factor for each identified nuclide i, $\text{m}^2\text{-mrem/y}$ per $\mu\text{Ci/s}$. Dose factors are calculated as described in Section 7.8.1.
- R_{Gi} = ground plane dose factor for each identified nuclide i, $\text{m}^2\text{-mrem/y}$ per $\mu\text{Ci/s}$. Dose factors are calculated as described in Section 7.8.14.

The organ dose rates for all pathways are summed to find the total site dose rate. The maximum organ dose rate is selected from among the dose rates calculated for all locations, organs, and age groups.

7.4 CUMULATIVE DOSE - NOBLE GASES

Doses to be calculated are gamma and beta air doses due to exposure to noble gases. For elevated releases (stack), a finite cloud model will be used for the gamma dose. All other releases will be calculated using a semi-infinite cloud model. The doses will be calculated at three locations: the land-site boundary locations with the highest annual-average split-level χ/Q ; the land-site boundary location with the highest ground-level annual-average χ/Q ; and the offsite location with the highest annual-average elevated-level χ/Q . The joint frequency distributions for the three levels of met data are given in Table 7.3. The locations, and their respective dispersion factors are listed in Table 7.1. Dispersion factors are calculated using the methodology described in Section 7.9.2

No credit is taken for radioactive decay.

7.4.1 Gamma Dose to Air

The gamma air dose, D_γ in mrad, is calculated for each release permit using one of the following equations:

For ground or split-level release/discharge points:

$$D_\gamma = 3.17E-08 T \sum_i [DF_{\gamma i} Q_i \chi/Q] \quad (7.7)$$

For elevated release/discharge points:

$$D_\gamma = 3.17E-08 T \sum_i [B_i Q_i] \quad (7.8)$$

where:

- 3.17E-08 = conversion factor, y/s.
- T = duration of release, s.
- $DF_{\gamma i}$ = dose conversion factor for external gamma for nuclide i (Table 7.4), mrad/y per $\mu\text{Ci}/\text{m}^3$.
- Q_i = the release rate of radionuclide i, $\mu\text{Ci}/\text{s}$.
- χ/Q = the highest calculated annual-average relative concentration for any area at or beyond the unrestricted area boundary for the release type under consideration (Table 7.1), s/m^3 .
- B_i = the constant for long term releases (greater than 500 h/y) for each identified noble gas radionuclide accounting for the gamma radiation from the elevated finite plume (Table 7.4), mrad/y per $\mu\text{Ci}/\text{s}$.

The location with the highest dose is selected as the critical receptor for each release. This receptor is used in the determination of the cumulative doses in Section 7.4.3.

7.4.2 Beta Dose to Air

The beta air dose, D_{β} in mrad, is calculated for each release permit using the following equation:

$$D_{\beta} = 3.17E-08 T \sum_i [DF_{\beta i} (Q_i \chi/Q)] \quad (7.9)$$

where:

- 3.17E-08 = conversion factor, y/s.
- T = duration of release, s.
- $DF_{\beta i}$ = dose conversion factor for external beta for nuclide i (Table 7.4), mrad/y per $\mu\text{Ci}/\text{m}^3$.
- Q_i = the release rate of radionuclide i from the release/discharge point under consideration, $\mu\text{Ci}/\text{s}$.
- χ/Q = the highest calculated annual average relative concentration for any area at or beyond the unrestricted area boundary for the release/discharge point under consideration (Table 7.1), s/m^3 .

The beta-air dose calculated by this method will be used in the cumulative dose calculations discussed in Section 7.4.3.

7.4.3 Cumulative Dose - Noble Gas

Quarterly and annual sums of all doses are calculated for each release as described below to compare to the limits listed in ODCM Control 1.2.2.2.

For noble gases, cumulative doses are calculated for gamma and beta air doses. Doses due to each release are summed with the doses for all previous release in the quarter or year to obtain cumulative quarterly and annual doses.

7.4.4 Comparison to Limits

The cumulative calendar quarter and calendar year doses are compared to their respective limits for each release to determine compliance.

7.5 CUMULATIVE DOSE - I-131, I-133, TRITIUM AND RADIONUCLIDES IN PARTICULATE FORM WITH HALF-LIVES GREATER THAN 8 DAYS

7.5.1 Organ Dose Calculation

Organ dose due to I-131, I-133, tritium and all radionuclides in particulate form with half-lives of greater than 8 days are calculated for each release permit for the critical receptor. The critical receptor is defined as the receptor with the highest calculated dose of all the receptors defined in Table 7.1. Annual average χ/Q and D/Q are calculated using the methodology in Sections 7.9.2 and 7.9.3 using the historical 1977-88 meteorological data (Table 7.2). Pathways considered to exist at these locations are inhalation, ground plane exposure, grass-cow-milk ingestion, grass-cow-beef ingestion and fresh leafy and stored vegetable ingestion. All age groups are considered (adult, teen, child and infant). Dose factors for these age groups and pathways are calculated as described in Section 7.8. For the ground exposure pathway, which has no age or organ specific dose factors, the total body dose will be added to the internal organ doses for all age groups. No credit is taken for radioactive decay.

The general equation for the calculation of organ dose is:

$$D_{org} = 3.17E-08 \sum_i \sum_P T R_{pi} [W_p Q_i] \quad (7.10)$$

where:

- 3.17E-08 = conversion factor, y/s.
- T = duration of release from release/discharge point under consideration, s.
- R_{pi} = dose factor for pathway P for each identified nuclide i, m^2 -mrem/y per $\mu Ci/s$ for ground plane, grass-cow-milk, grass-cow-meat, and vegetation pathways, and mrem/y per $\mu Ci/m^3$ for inhalation and tritium ingestion pathways. Equations for calculating these dose factors are given in Section 7.8.
- W_p = dispersion factor for the release/discharge point under consideration and pathway P (Table 7.1).
= χ/Q for the inhalation and tritium ingestion pathways,
= D/Q for the food and ground plane pathways,
- Q_i = release rate for radionuclide i from release/discharge point under consideration, $\mu Ci/s$.

The receptor with the highest dose of all locations, age groups and organs is selected as the critical receptor. The age group with the highest dose for that receptor is selected as the critical age group. The organ dose for the critical age group will be used in the cumulative doses discussed in Section 7.5.2.

7.5.2 Cumulative Doses

Quarterly and annual sums of all doses are calculated for each release as described below to compare to the limits listed in ODCM Control 1.2.2.3.

For maximum organ dose, cumulative quarterly and annual doses are maintained for each of the eight organs considered. The cumulative dose is obtained by summing the doses for each organ of the critical age group (as calculated in Section 7.5.1) as determined for each release with the organ doses for all previous releases in the quarter or year to obtain the cumulative quarterly and annual doses. Thus, the cumulative organ doses will be conservative values, consisting of doses belonging to various age groups depending on the mix of radionuclides. The highest of these cumulative organ doses is used for the comparison to the limits described in ODCM Control 1.2.2.3.

7.5.3 Comparison to Limits

The cumulative calendar quarter and calendar year doses are compared to their respective limits for each release to determine compliance.

7.6 GASEOUS RADWASTE TREATMENT

7.6.1 DOSE PROJECTIONS

Dose projections will be performed by averaging the calculated dose for the most recent month and the calculated dose for the previous month and assigning that average dose as the projection for the current month.

If the results of the dose projection indicate potential doses in excess of the monthly fraction of the annual dose limit, efforts will be made to minimize future releases.

7.6.2 SYSTEM DESCRIPTION

Figure 7.1 shows major elements of the Gaseous Radwaste Treatment System. The system includes the subsystems that process and dispose of the gases from the main condenser air ejectors, the startup vacuum pumps, and the gland seal condensers. One gaseous radwaste treatment system is provided for each unit. The processed gases from each unit are routed to the plant stack for dilution and elevated release to the atmosphere. The air-ejector off-gas line of each unit and the stack are continuously monitored by radiation monitors.

7.7 DOSE CALCULATIONS FOR REPORTING PURPOSES

A complete dose analysis utilizing the total estimated gaseous releases for each calendar quarter will be performed and reported as required in ODCM Administrative Control 5.2. Methodology for this analysis is that which is described below, using the quarterly release values. For iodine releases, it will be assumed that half the iodines released are organic iodines, which contribute only to the inhalation dose. All real pathways and receptor locations (as identified in the most recent land use survey) are considered. In addition, actual meteorological data representative of each corresponding calendar quarter will be used to calculate dispersion factors as described in Section 7.9. Stack releases will be considered elevated releases. Radwaste and reactor building releases will be considered split-level releases. Turbine building releases will be treated as ground level.

7.7.1 Noble Gas Dose

All measured radionuclides are used to calculate gamma and beta air doses. The dose is evaluated at the nearest SITE BOUNDARY point in each sector and at other locations expected to be maximum exposure points using a semi-infinite cloud model. The use of a finite cloud model would result in calculated doses of 0 to 10 percent higher than those calculations using the semi-infinite cloud model for BFN.

Radioactive decay is considered in this calculation. The quarterly release is averaged over one year to obtain an average release rate.

7.7.1.1 Gamma Dose to Air

$$D_{\gamma n} = \sum_i \chi_{ni} DF_{\gamma i} \quad (7.12)$$

where:

- $D_{\gamma n}$ = gamma dose to air for sector n, mrad.
 χ_{ni} = air concentration of radionuclide i in sector n, $\mu\text{Ci-y}/\text{m}^3$. Air concentrations are calculated as described by Equation 7.16.
 $DF_{\gamma i}$ = gamma-to-air dose factor for radionuclide i, mrad/y per $\mu\text{Ci}/\text{m}^3$ (Table 7.4).

7.7.1.2 Beta Dose to Air

$$D_{\beta n} = \sum_i \chi_{ni} DF_{\beta i} \quad (7.13)$$

where:

- $D_{\beta n}$ = beta dose to air for sector n, mrad.
 χ_{ni} = air concentration of radionuclide i in sector n, $\mu\text{Ci-y}/\text{m}^3$. Air concentrations are calculated as described by Equation 7.16.
 $DF_{\beta i}$ = beta-to-air dose factor for radionuclide i, mrad/y per $\mu\text{Ci}/\text{m}^3$ (Table 7.4).

7.7.2 Radioiodine, Particulate and Tritium - Maximum Organ Dose

Organ doses due to radioiodine, particulate and tritium releases are calculated using the following equation:

$$D_{org} = 3.17E-08 \left[\sum_i (D/Q \sum_P R_{Pi} + D/Q R_{Gi} + \chi/Q R_{Ii}) Q_i + \sum_P (\chi/Q R_{PT}) Q_T \right] \quad (7.14)$$

where:

D_{org} = Organ dose, mrem.

$3.17E-08$ = conversion factor, y/s.

χ/Q = Relative concentration for location under consideration, s/m³.
Relative concentrations are calculated as described by Equation 7.17.

R_{Pi} = ingestion dose factor for pathway P for each identified nuclide i (except tritium), m²-mrem/y per μ Ci/s. Ingestion pathways available for consideration include:
pasture grass-cow-milk ingestion
stored feed-cow-milk ingestion
pasture grass-goat-milk ingestion
stored feed-goat-milk ingestion
pasture grass-beef ingestion
stored feed-beef ingestion
fresh leafy vegetable ingestion
stored vegetable ingestion

Equations for calculating these ingestion dose factors are given in Sections 7.8.1 through 7.8.6.

D/Q = Relative deposition for location under consideration, m⁻².
Relative deposition is calculated as described in Equation 7.18.

R_{Gi} = Dose factor for standing on contaminated ground, m²-mrem/y per μ Ci/s. The equation for calculating the ground plane dose factor is given in Section 7.8.14.

R_{Ii} = Inhalation dose factor, mrem/y per μ Ci/m³. The equation for calculating the inhalation dose factor is given in Section 7.8.13.

Q_i = adjusted release for nuclide i for location under consideration, μCi .
The initial release is adjusted to account for decay between the release point and the location, depending on the frequency of wind speeds applicable to that sector. Hence, the adjusted release is equal to the actual release decayed for an average travel time during the period.

$$= Q_{i0} \sum_{j=1}^9 f_j \exp(-\lambda_i x/u_j)$$

where:

Q_{i0} = initial average release for nuclide i over the period, μCi .

f_j = joint relative frequency of occurrence of winds in windspeed class j blowing toward this exposure point, expressed as a fraction.

λ_i = radiological decay constant for nuclide i , s^{-1} .

x = downwind distance, meters.

u_j = midpoint value of wind speed class interval j , m/s .

R_{PT} = ingestion dose factor for pathway P for tritium, $\text{mrem/y per } \mu\text{Ci/m}^3$.
Ingestion pathways available for consideration are the same as those listed above for R_{Pi} . Equations for calculating ingestion dose factors for tritium are given in Sections 7.8.7 through 7.8.12.

Q_T = adjusted release for tritium for location under consideration, μCi .
Calculated in the same manner as Q_i above.

7.7.3 Population Doses

For determining population doses to the 50-mile population around the plant, each compass sector is broken down into elements. These elements are defined in Table 7.5. For each of these sector elements, an average dose is calculated, and then multiplied by the population in that sector element. Dispersion factors are calculated for the midpoint of each sector element (see Table 7.5) using the methodology described in Section 7.9. For population doses resulting from ingestion, it is conservatively assumed that all food eaten by the average individual is grown locally.

The general equation used for calculating the population dose in a given sector element is:

$$\text{Dose}_{\text{pop}} = \sum_P \text{RATIO}_P * \text{POP}_N * \text{AGE} * 0.001 * \text{DOSE}_P \quad (7.15)$$

where:

RATIO_P = ratio of average to maximum dose for pathway P. (Average ingestion rates are obtained from Regulatory Guide 1.109, Table E-4.)
= 0.5 for submersion and ground exposure pathways, a shielding/occupancy factor.
= 1.0 for the inhalation pathway.
= 0.515, 0.515, 0.5, and 0.355 for milk, for infant, child, teen and adult, respectively. (It is assumed that the ratio of average to maximum infant milk ingestion rates is the same as that for child.)
= 1.0, 0.90, 0.91, 0.86 for beef ingestion, for infant, child, teen and adult, respectively.
= 1.0, 0.38, 0.38, 0.37 for vegetable ingestion, for infant, child, teen and adult, respectively. (It is assumed that the average individual eats no fresh vegetables, only stored vegetables.)

POP_N = the population of the sector element, persons (Table 7.6).

AGE = fraction of the population belonging to each age group.
= 0.015, 0.168, 0.153, 0.665 for infant, child, teen and adult, respectively (fractions taken from NUREG/CR-1004, Table 3.39).

0.001 = conversion from mrem to rem.

DOSE_P = the dose for pathway P to the maximum individual at the location under consideration, mrem. For ingestion pathways, this dose is multiplied by an average decay correction to account for decay as the food is moved through the food distribution cycle. This average decay correction, ADC, is defined as:

$$\text{ADC} = \exp(-\lambda_i t), \quad \text{for milk and vegetables,}$$

where:

λ_i = decay constant for nuclide i, s.
t = distribution time for food product under consideration (from Regulatory Guide 1.109, Table D-1).
= 1.21E+06 s (14 d) for vegetables.
= 3.46E+05 s (4 d) for milk.

$$\text{ADC} = \frac{\exp(-\lambda_i t) \lambda_i t_{cb}}{1 - \exp(-\lambda_i t_{cb})}, \text{ for meat,}$$

where:

λ_i = decay constant for nuclide i , s.

t = additional distribution time for meat, over and above the time for slaughter to consumption described in Section 7.8.3, 7d (from Regulatory Guide 1.109, Table D-2).

t_{cb} = time to consume a whole beef, as described in Section 7.8.3.

For beef ingestion, the additional factors in the calculation of ADC negate the integration of the dose term over the period during which a whole beef is consumed, for the calculation of population dose. This assumes that the maximum individual freezes and eats a whole beef, but the average individual buys smaller portions at a time.

Population doses are summed over all sector elements to obtain a total population dose for the 50-mile population.

7.7.4 Reporting of Doses

The calculated quarterly doses and calculated population doses described in this section are reported in the Annual Radioactive Effluent Release Report as described in ODCM Administrative Control 5.2

7.7.5 Dose to a MEMBER OF THE PUBLIC Inside the SITE BOUNDARY

The Basis for ODCM Control 1.2.2.1 states that for MEMBERS OF THE PUBLIC who may at times be within the SITE BOUNDARY, the occupancy factor of that MEMBER OF THE PUBLIC will usually be sufficiently low to compensate for any increase in the atmospheric dispersion factor above that for the SITE BOUNDARY.

The highest dose to a MEMBER OF THE PUBLIC will consider the effects of effluent pathways (onsite and offsite) and direct radiation from plant operating activities.

The dose to this hypothetical MEMBER OF THE PUBLIC will be determined on an annual basis (using the methodology above) to ensure that the actual exposure to any individual is less than 100 mrem/year. The results of this review will be included in the Annual Radiological Effluent Report pursuant to ODCM Administrative Control 5.2.

7.8 GASEOUS DOSE FACTOR EQUATIONS

7.8.1 Pasture Grass-Cow/Goat-Milk Ingestion Dose Factors (m²-mrem/y per μCi/s)

$$RC_{Pi} = 10^6 DFL_{iaj} U_{ap} F_{mi} Q_f \exp(-\lambda_i t_{fm}) f_{pc} \left\{ \frac{r(1-\exp(-\lambda_E t_{em}))}{Y_p \lambda_E} + \frac{B_{iv}(1-\exp(-\lambda_i t_b))}{P \lambda_i} \right\}$$

where:

- 10⁶ = conversion factor, pCi/μCi.
- DFL_{iaj} = ingestion dose conversion factor for nuclide i, age group a, organ j, mrem/pCi (Table 6.4).
- U_{ap} = milk ingestion rate for age group a, L/y.
- F_{mi} = transfer factor for nuclide i from animal's feed to milk, d/L (Table 6.2).
- Q_f = animal's consumption rate, kg/d.
- λ_i = decay constant for nuclide i, s⁻¹ (Table 6.2).
- t_{fm} = transport time from milking to receptor, s.
- f_{pc} = fraction of time animal spends on pasture, dimensionless.
- r = fraction of activity retained on pasture grass, dimensionless.
- λ_E = the effective decay constant, due to radioactive decay and weathering, s⁻¹, equal to λ_i + λ_w.
- λ_w = weathering decay constant for leaf and plant surfaces, s⁻¹.
- t_{em} = time pasture is exposed to deposition, s.
- Y_p = agricultural productivity by unit area of pasture grass, kg/m².
- B_{iv} = transfer factor for nuclide i from soil to vegetation, pCi/kg (wet weight of vegetation) per pCi/kg (dry soil).
- t_b = time period over which accumulation on the ground is evaluated, s.
- P = effective surface density of soil, kg/m².

NOTE: Factors defined above which do not reference a table for their numerical values, are listed in Table 6.3.

7.8.2 Stored Feed-Cow/Goat-Milk Ingestion Dose Factors
(m²-mrem/y per μCi/s)

$$RCS_i = 10^6 DFL_{iaj} U_{ap} F_{mi} Q_f f_{sc} \exp(-\lambda_i t_{mc}) \frac{(1 - \exp(-\lambda_i t_{csf}))}{t_{csf} \lambda_i} \left\{ \frac{r(1 - \exp(-\lambda_E t_{esf}))}{Y_s \lambda_E} + \frac{B_{iv}(1 - \exp(-\lambda_i t_b))}{P \lambda_i} \right\}$$

where:

- 10⁶ = conversion factor, pCi/μCi.
- DFL_{iaj} = ingestion dose conversion factor for nuclide i, age group a, organ j, mrem/pCi (Table 6.4).
- U_{ap} = milk ingestion rate for age group a, L/y.
- F_{mi} = transfer factor for nuclide i from animal's feed to milk, d/L (Table 6.2).
- Q_f = animal's consumption rate, kg/d.
- f_{sc} = fraction of time animal spends on stored feed, dimensionless.
- λ_i = decay constant for nuclide i, s⁻¹ (Table 6.2).
- t_{mc} = transport time from milking to receptor, s.
- t_{csf} = time between harvest of stored feed and consumption by animal, s.
- r = fraction of activity retained on pasture grass, dimensionless.
- λ_E = the effective decay constant, due to radioactive decay and weathering, s⁻¹, equal to λ_i + λ_w.
- λ_w = weathering decay constant for leaf and plant surfaces, s⁻¹.
- t_{esf} = time stored feed is exposed to deposition, s.
- Y_s = agricultural productivity by unit area of stored feed, kg/m².
- B_{iv} = transfer factor for nuclide i from soil to vegetation, pCi/kg (wet weight of vegetation) per pCi/kg (dry soil).
- t_b = time period over which accumulation on the ground is evaluated, s.
- P = effective surface density of soil, kg/m².

NOTE: Factors defined above which do not reference a table for their numerical values, are listed in Table 6.3.

7.8.3 Pasture Grass-Beef Ingestion Dose Factors
(m²-mrem/y per μCi/s)

$$R_{MPi} = 10^6 \text{ DFL}_{iaj} U_{am} F_{fi} Q_f \frac{(1 - \exp(-\lambda_i t_{cb})) \exp(-\lambda_i t_s) f_p}{\lambda_i t_{cb}} \left(\frac{r(1 - \exp(-\lambda_E t_{em}))}{Y_p \lambda_E} + \frac{B_{iv}(1 - \exp(-\lambda_i t_b))}{P \lambda_i} \right)$$

where:

- 10⁶ = conversion factor, pCi/μCi.
DFL_{iaj} = ingestion dose conversion factor for nuclide i, age group a, organ j, mrem/pCi (Table 6.4).
U_{am} = meat ingestion rate for age group a, kg/y.
F_{fi} = transfer factor for nuclide i from cow's feed to meat, d/kg (Table 6.2).
Q_f = cow's consumption rate, kg/d.
λ_i = decay constant for nuclide i, s⁻¹ (Table 6.2).
t_{cb} = time for receptor to consume a whole beef, s.
t_s = transport time from slaughter to consumer, s.
f_p = fraction of time cow spends on pasture, dimensionless.
r = fraction of activity retained on pasture grass, dimensionless.
λ_E = the effective decay constant, due to radioactive decay and weathering, s⁻¹, equal to λ_i + λ_w.
λ_w = weathering decay constant for leaf and plant surfaces, s⁻¹.
t_{em} = time pasture is exposed to deposition, s.
Y_p = agricultural productivity by unit area of pasture grass, kg/m².
B_{iv} = transfer factor for nuclide i from soil to vegetation, pCi/kg (wet weight of vegetation) per pCi/kg (dry soil).
t_b = time over which accumulation on the ground is evaluated, s.
P = effective surface density of soil, kg/m².

NOTE: Factors defined above which do not reference a table for their numerical values, are listed in Table 6.3.

7.8.4 Stored Feed-Beef Ingestion Dose Factors
(m²-mrem/y per μCi/s)

$$RMS_i = 10^6 DFL_{iaj} U_{am} F_{fi} Q_f \frac{(1 - \exp(-\lambda_i t_{cb}))}{\lambda_i t_{cb}} \exp(-\lambda_i t_s) \\
f_s \left\{ \frac{(1 - \exp(-\lambda_i t_{csf}))}{\lambda_i t_{csf}} \left(\frac{r(1 - \exp(-\lambda_E t_{esf}))}{Y_{sf} \lambda_E} + \frac{B_{iv}(1 - \exp(-\lambda_i t_b))}{P \lambda_i} \right) \right\}$$

where:

- 10⁶ = conversion factor, pCi/μCi.
DFL_{iaj} = ingestion dose conversion factor for nuclide i, age group a, organ j, mrem/pCi (Table 6.4).
U_{am} = meat ingestion rate for age group a, kg/y.
F_{fi} = transfer factor for nuclide i from cow's feed to meat, d/kg (Table 6.2).
Q_f = cow's consumption rate, kg/d.
λ_i = decay constant for nuclide i, s⁻¹ (Table 6.2).
t_{cb} = time for receptor to consume a whole beef, s.
t_s = transport time from slaughter to consumer, s.
f_s = fraction of time cow spends on stored feed, dimensionless.
t_{csf} = time between harvest of stored feed and consumption by cow, s.
r = fraction of activity retained on pasture grass, dimensionless.
t_{esf} = time stored feed is exposed to deposition, s.
Y_{sf} = agricultural productivity by unit area of stored feed, kg/m².
λ_E = the effective decay constant, due to radioactive decay and weathering, s⁻¹, equal to λ_i + λ_w.
λ_w = weathering decay constant for leaf and plant surfaces, s⁻¹.
B_{iv} = transfer factor for nuclide i from soil to vegetation, pCi/kg (wet weight of vegetation) per pCi/kg (dry soil).
t_b = time over which accumulation on the ground is evaluated, s.
P = effective surface density of soil, kg/m².

NOTE: Factors defined above which do not reference a table for their numerical values, are listed in Table 6.3.

7.8.5 Fresh Leafy Vegetable Ingestion Dose Factors
(m²-mrem/y per μCi/s)

$$R_{VFi} = 10^6 \text{ DFL}_{iaj} \exp(-\lambda_i t_{hc}) U_{FLa} f_L \left\{ \frac{r(1-\exp(-\lambda_E t_e))}{Y_f \lambda_E} + \frac{B_{iv}(1-\exp(-\lambda_i t_b))}{P \lambda_i} \right\}$$

where:

- 10⁶ = conversion factor, pCi/μCi.
- DFL_{iaj} = ingestion dose conversion factor for nuclide i, age group a, organ j, mrem/pCi (Table 6.4).
- λ_i = decay constant for nuclide i, s⁻¹ (Table 6.2).
- t_{hc} = average time between harvest of vegetables and their consumption and/or storage, s.
- U_{FLa} = consumption rate of fresh leafy vegetables by the receptor in age group a, kg/y.
- f_L = fraction of fresh leafy vegetables grown locally, dimensionless.
- r = fraction of deposited activity retained on vegetables, dimensionless.
- λ_E = the effective decay constant, due to radioactive decay and weathering, s⁻¹.
= λ_i + λ_w
- λ_w = decay constant for removal of activity on leaf and plant surfaces by weathering, s⁻¹.
- t_e = exposure time in garden for fresh leafy and/or stored vegetables, s.
- Y_f = vegetation areal density for fresh leafy vegetables, kg/m².
- B_{iv} = transfer factor for nuclide i from soil to vegetables, pCi/kg (wet weight of vegetation) per pCi/kg (dry soil).
- t_b = time period over which accumulation on the ground is evaluated, s.
- P = effective surface density of soil, kg/m².

NOTE: Factors defined above which do not reference a table for their numerical values, are listed in Table 6.3.

7.8.6 Stored Vegetable Ingestion Dose Factors
(m²-mrem/y per μCi/s)

$$R_{VSi} = 10^6 \text{ DFL}_{iaj} \exp(-\lambda_i t_{hc}) U_{sa} f_g \frac{(1 - \exp(-\lambda_i t_{sv}))}{\lambda_i t_{sv}} \left\{ \frac{r(1 - \exp(-\lambda_E t_e))}{Y_{sv} \lambda_E} + \frac{B_{iv}(1 - \exp(-\lambda_i t_b))}{P \lambda_i} \right\}$$

where:

- 10⁶ = conversion factor, pCi/μCi.
- DFL_{iaj} = ingestion dose conversion factor for nuclide i, age group a, organ j, mrem/pCi (Table 6.4).
- λ_i = decay constant for nuclide i, s⁻¹ (Table 6.2).
- t_{hc} = average time between harvest of vegetables and their consumption and/or storage, s.
- U_{sa} = consumption rate of stored vegetables by the receptor in age group a, kg/y.
- f_g = fraction of stored vegetables grown locally, dimensionless.
- t_{sv} = time between storage of vegetables and their consumption, s.
- r = fraction of deposited activity retained on vegetables, dimensionless.
- λ_E = the effective decay constant, due to radioactive decay and weathering, s⁻¹.
= λ_i + λ_w
- λ_w = decay constant for removal of activity on leaf and plant surfaces by weathering, s⁻¹.
- t_e = exposure time in garden for fresh leafy and/or stored vegetables, s.
- Y_{sv} = vegetation areal density for stored vegetables, kg/m².
- B_{iv} = transfer factor for nuclide i from soil to vegetables, pCi/kg (wet weight of vegetation) per pCi/kg (dry soil).
- t_b = time period over which accumulation on the ground is evaluated, s.
- P = effective surface density of soil, kg/m².

NOTE: Factors defined above which do not reference a table for their numerical values, are listed in Table 6.3.

7.8.7 Tritium-Pasture Grass-Cow/Goat-Milk Dose Factor
(mrem/y per $\mu\text{Ci}/\text{m}^3$)

$$R_{\text{CTP}} = 10^3 10^6 \text{DFL}_{\text{Taj}} F_{\text{mT}} Q_f U_{\text{ap}} [0.75(0.5/H)] f_p \exp(-\lambda_{\text{T}} t_{\text{fm}})$$

where:

- 10^3 = conversion factor, g/kg.
- 10^6 = conversion factor, pCi/ μCi .
- DFL_{Taj} = ingestion dose conversion factor for tritium for age group a, organ j, mrem/pCi (Table 6.4).
- F_{mT} = transfer factor for tritium from animal's feed to milk, d/L (Table 6.2).
- Q_f = animal's consumption rate, kg/d.
- U_{ap} = milk ingestion rate for age group a, L/y.
- 0.75 = the fraction of total feed that is water.
- 0.5 = the ratio of the specific activity of the feed grass water to the atmospheric water.
- H = absolute humidity of the atmosphere, g/m^3 .
- f_p = fraction of time animal spends on pasture, dimensionless.
- λ_{T} = decay constant for tritium, s^{-1} (Table 6.2).
- t_{fm} = transport time from milking to receptor, s.

NOTE: Factors defined above which do not reference a table for their numerical values, are listed in Table 6.3.

7.8.8 Tritium-Stored Feed-Cow/Goat-Milk Dose Factor
(mrem/y per $\mu\text{Ci}/\text{m}^3$)

$$R_{\text{CTS}} = 10^3 10^6 \text{DFL}_{\text{Taj}} F_{\text{mT}} Q_f U_{\text{ap}} [0.75(0.5/H)] f_s \frac{(1-\exp(-\lambda_{\text{T}}t_{\text{CSf}}))}{\lambda_{\text{T}} t_{\text{CSf}}} \exp(-\lambda_{\text{T}}t_{\text{fm}})$$

where:

- 10^3 = conversion factor, g/kg.
- 10^6 = conversion factor, pCi/ μCi .
- DFL_{Taj} = ingestion dose conversion factor for tritium for age group a, organ j, mrem/pCi (Table 6.4).
- F_{mT} = transfer factor for tritium from animal's feed to milk, d/L (Table 6.2).
- Q_f = animal's consumption rate, kg/d.
- U_{ap} = milk ingestion rate for age group a, L/y.
- 0.75 = the fraction of total feed that is water.
- 0.5 = the ratio of the specific activity of the feed grass water to the atmospheric water.
- H = absolute humidity of the atmosphere, g/ m^3 .
- f_s = fraction of time animal spends on stored feed, dimensionless.
- λ_{T} = decay constant for tritium, s^{-1} (Table 6.2).
- t_{CSf} = time between harvest of stored feed and consumption by animal, s.
- t_{fm} = transport time from milking to receptor, s.

NOTE: Factors defined above which do not reference a table for their numerical values, are listed in Table 6.3.

7.8.9 Tritium-Pasture Grass-Beef Dose Factor
(mrem/y per $\mu\text{Ci}/\text{m}^3$)

$$R_{MT} = 10^3 10^6 \text{DFL}_{Taj} F_{fT} Q_f U_{am} [0.75(0.5/H)] f_p \exp(-\lambda_T t_s) \frac{(1-\exp(-\lambda_T t_{ep}))}{\lambda_T t_{ep}} \frac{(1-\exp(-\lambda_T t_{cb}))}{\lambda_T t_{cb}}$$

where:

- 10^3 = conversion factor, g/kg.
- 10^6 = conversion factor, pCi/ μCi .
- DFL_{Taj} = ingestion dose conversion factor for tritium for age group a, organ j, mrem/pCi (Table 6.4).
- F_{fT} = transfer factor for tritium from cow's feed to meat, d/kg (Table 6.2).
- Q_f = cow's consumption rate, kg/d.
- U_{am} = meat ingestion rate for age group a, kg/y.
- 0.75 = the fraction of total feed that is water.
- 0.5 = the ratio of the specific activity of the feed grass water to the atmospheric water.
- H = absolute humidity of the atmosphere, g/m^3 .
- f_p = fraction of time cow spends on pasture, dimensionless.
- λ_T = decay constant for tritium, s^{-1} (Table 6.2).
- t_s = transport time from slaughter to consumer, s.
- t_{ep} = time pasture is exposed to deposition, s.
- t_{cb} = time for receptor to consume a whole beef, s.

NOTE: Factors defined above which do not reference a table for their numerical values, are listed in Table 6.3.

7.8.10 Tritium-Stored Feed-Beef Dose Factor
(mrem/y per $\mu\text{Ci}/\text{m}^3$)

$$R_{\text{MTS}} = 10^3 10^6 \text{DFL}_{\text{Taj}} F_{\text{fT}} Q_{\text{f}} U_{\text{am}} [0.75(0.5/H)] f_{\text{s}} \exp(-\lambda_{\text{T}}t_{\text{s}}) \frac{(1-\exp(-\lambda_{\text{T}}t_{\text{csf}}))}{\lambda_{\text{T}} t_{\text{csf}}} \frac{(1-\exp(-\lambda_{\text{T}}t_{\text{cb}}))}{\lambda_{\text{T}} t_{\text{cb}}}$$

where:

- 10^3 = conversion factor, g/kg.
- 10^6 = conversion factor, pCi/ μCi .
- DFL_{Taj} = ingestion dose conversion factor for tritium for age group a, organ j, mrem/pCi (Table 6.4).
- F_{fT} = transfer factor for tritium from cow's feed to meat, d/kg (Table 6.2).
- Q_{f} = cow's consumption rate, kg/d.
- U_{am} = meat ingestion rate for age group a, kg/y.
- 0.75 = the fraction of total feed that is water.
- 0.5 = the ratio of the specific activity of the feed grass water to the atmospheric water.
- H = absolute humidity of the atmosphere, g/m^3 .
- f_{s} = fraction of time cow spends on stored feed, dimensionless.
- λ_{T} = decay constant for tritium, s^{-1} (Table 6.2).
- t_{s} = transport time from slaughter to consumer, s.
- t_{csf} = time between harvest of stored feed and consumption by animal, s.
- t_{cb} = time for receptor to consume a whole beef, s.

NOTE: Factors defined above which do not reference a table for their numerical values, are listed in Table 6.3.

7.8.11 Tritium-Fresh Leafy Vegetable Dose Factor
(mrem/y per $\mu\text{Ci}/\text{m}^3$)

$$R_{\text{VTF}} = 10^3 10^6 \text{DFL}_{\text{Taj}} [0.75(0.5/H)] U_{\text{FLa}} f_{\text{L}} \exp(-\lambda_{\text{T}} t_{\text{hc}})$$

where:

- 10^3 = conversion factor, g/kg.
- 10^6 = conversion factor, pCi/ μCi .
- DFL_{Taj} = ingestion dose conversion factor for tritium for age group a, organ j, mrem/pCi (Table 6.4).
- 0.75 = the fraction of total vegetation that is water.
- 0.5 = the ratio of the specific activity of the vegetables water to the atmospheric water.
- H = absolute humidity of the atmosphere, g/m^3 .
- U_{FLa} = consumption rate of fresh leafy vegetables by the receptor in age group a, kg/y.
- f_{L} = fraction of fresh leafy vegetables grown locally, dimensionless.
- λ_{T} = decay constant for tritium, s^{-1} (Table 6.2).
- t_{hc} = time between harvest of vegetables and their consumption and/or storage, s.

NOTE: Factors defined above which do not reference a table for their numerical values, are listed in Table 6.3.

7.8.12 Tritium-Stored Vegetables Dose Factor
(mrem/y per $\mu\text{Ci}/\text{m}^3$)

$$R_{\text{VTS}} = 10^3 10^6 \text{DFL}_{\text{Taj}} [0.75(0.5/H)] U_{\text{Safg}} \frac{(1-\exp(-\lambda_{\text{T}}t_{\text{sv}}))}{\lambda_{\text{T}} t_{\text{sv}}} \exp(-\lambda_{\text{T}}t_{\text{hc}})$$

where:

- 10^3 = conversion factor, g/kg.
- 10^6 = conversion factor, pCi/ μCi .
- DFL_{Taj} = ingestion dose conversion factor for tritium for age group a, organ j, mrem/pCi (Table 6.4).
- 0.75 = the fraction of total vegetation that is water.
- 0.5 = the ratio of the specific activity of the vegetation water to the atmospheric water.
- H = absolute humidity of the atmosphere, g/m^3 .
- U_{Sa} = consumption rate of stored vegetables by the receptor in age group a, kg/y.
- f_{g} = fraction of stored vegetables grown locally, dimensionless.
- λ_{T} = decay constant for tritium, s^{-1} (Table 6.2).
- t_{sv} = time between harvest of stored vegetables and their consumption and/or storage, s.
- t_{hc} = time between harvest of vegetables and their storage, s.

NOTE: Factors defined above which do not reference a table for their numerical values, are listed in Table 6.3.

7.8.13 Inhalation Dose Factors
(mrem/y per $\mu\text{Ci}/\text{m}^3$)

$$R_{Ii} = \text{DFA}_{iaj} \text{BR}_a 10^6$$

where:

DFA_{iaj} = inhalation dose conversion factor for nuclide i, age group a and organ j, mrem/pCi (Table 7.7).

BR_a = breathing rate for age group a, m^3/y (Table 6.3).

10^6 = conversion factor, pCi/ μCi .

7.8.14 Ground Plane Dose Factors
(m^2 -mrem/y per $\mu\text{Ci}/\text{s}$)

$$R_{Gi} = \text{DF}_{Gij} (1/\lambda_i) 10^6 8760 [1 - \exp(-\lambda_i t_b)]$$

where:

DF_{Gij} = dose conversion factor for standing on contaminated ground for nuclide i and organ j (total body and skin), mrem/h per pCi/ m^2 (Table 6.6).

λ_i = decay constant of nuclide i, s^{-1} (Table 6.2).

10^6 = conversion factor, pCi/ μCi .

8760 = conversion factor, h/y.

t_b = time period over which the ground accumulation is evaluated, s (Table 6.3).

7.9 DISPERSION METHODOLOGY

Dispersion factors are calculated for radioactive effluent releases using hourly average meteorological data collected onsite.

Meteorological data for ground level releases consist of windspeed and direction measurements at 10m and temperature measurements of 10m and 45 m.

Hourly average meteorological data for the ground level portion of a split level release consist of wind speeds and directions measured at the 10m level and temperature measurements at 10m and 45m. The elevated portion of the split level release uses wind speeds and directions measured at the 46m level and temperature measurements at 45m and 90m.

Hourly average meteorological data for the elevated releases consist of windspeed and directions measured at 93m. Stability class D is assumed to persist during the entire period for elevated releases, except for the dose calculations described in Section 7.7 when all stability classes will be used to evaluate the elevated results.

Meteorological data are expressed as a joint-frequency distribution of wind speed, wind direction, and atmospheric stability for each release level (ground, split and elevated). The joint-frequency distributions which represent the historical meteorological data for the period January 1977 to December 1988 are given in Table 7.3.

The wind speed classes that are used are as follows:

<u>Number</u>	<u>Range (m/s)</u>	<u>Midpoint (m/s)</u>
1	<0.3	0.13
2	0.3-0.6	0.45
3	0.7-1.5	1.10
4	1.6-2.4	1.99
5	2.5-3.3	2.88
6	3.4-5.5	4.45
7	5.6-8.2	6.91
8	8.3-10.9	9.59
9	>10.9	10.95

The stability classes that will be used are the standard Pasquill A through G classifications. The stability classes 1-7 will correspond to A=1, B=2, ..., G=7.

A sector-average dispersion equation consistent with Regulatory Guide 1.111 is used. The dispersion model considers plume depletion (using information from Figure 7.3), and building wake effects. Terrain effects on dispersion are not considered except for reducing the effective height of an elevated release by the terrain height.

7.9.1 Annual Average Air Concentration

$$\chi \text{ (}\mu\text{Ci-y/m}^3\text{)}$$

Air concentrations of nuclides at downwind locations are calculated using the following equation:

$$\chi_i = \sum_{j=1}^9 \sum_{k=1}^7 \frac{f_{jk} Q_i p}{\sum_{zk} u_j (2\pi x/n)} \exp(-\lambda_i x/u_j) \exp(-h_e^2/2\sigma_{zk}^2) 10^6 3.17E-08 \quad (7.16)$$

where:

f_{jk} = joint relative frequency of occurrence of winds in windspeed class j , stability class k , blowing toward this exposure point, expressed as a fraction.

Q_i = amount released of radionuclide i , C_i .

p = fraction of radionuclide remaining in plume (Figure 7.3).

Σ_{zk} = vertical dispersion coefficient for stability class k which includes a building wake adjustment,
= $(\sigma_{zk}^2 + cA/\pi)^{1/2}$,

or = $\sqrt{3} \sigma_{zk}$, whichever is smaller (for ground level releases).

where:

σ_{zk} is the vertical dispersion coefficient for stability class k , m (Figure 7.4),

c is a building shape factor ($c=0.5$),

A is the minimum building cross-sectional area, 2400 m^2 .

u_j = midpoint value of wind speed class interval j , m/s .

x = downwind distance, m .

n = number of sectors, 16.

λ_i = radioactive decay coefficient of radionuclide i , s^{-1}

$2\pi x/n$ = sector width at point of interest, m .

h_e = effective release height, m . The effective release height is calculated as described in Section 7.9.4.

10^6 = conversion factor, μCi per C_i .

$3.17E-08$ = conversion factor, y/s .

7.9.2 Relative Concentration

$$\chi/Q \text{ (s/m}^3\text{)}$$

Relative concentrations of nuclides at downwind locations are calculated using the following equation:

$$\chi/Q = \sum_{j=1}^9 \sum_{k=1}^7 (2/\pi)^{1/2} \frac{f_{jk}}{\Sigma_{zk} u_j (2\pi x/n)} \exp(-h_e^2/2\sigma_{zk}^2) \quad (7.17)$$

where:

f_{jk} = joint relative frequency of occurrence of winds in windspeed class j , stability class k , blowing toward this exposure point, expressed as a fraction.

Σ_{zk} = vertical dispersion coefficient for stability class k which includes a building wake adjustment,
 $= (\sigma_{zk}^2 + cA/\pi)^{1/2}$,

or $= \sqrt{3} \Sigma_{zk}$, whichever is smaller (for ground level releases).

where:

σ_{zk} is the vertical dispersion coefficient for stability class k , m (Figure 7.4),

c is a building shape factor ($c=0.5$),

A is the minimum building cross-sectional area, 2400 m².

u_j = midpoint value of wind speed class interval j , m/s.

x = downwind distance, m.

n = number of sectors, 16.

$2\pi x/n$ = sector width at point of interest, m.

h_e = effective release height, m. The effective release height is calculated as described in Section 7.9.4.

7.9.3 Relative Deposition

$$D/Q \text{ (m}^{-2}\text{)}$$

Relative deposition of nuclides at downwind locations is calculated using the following equation:

$$D/Q = \sum_{j=1}^9 \sum_{k=1}^7 \frac{f_{jk} DR}{(2\pi x/n)} \quad (7.18)$$

where:

f_{jk} = joint relative frequency of occurrence of winds in windspeed class j and stability class k , blowing toward this exposure point, expressed as a fraction.

DR = relative deposition rate, m⁻¹ (from Figure 7.5). The choice of figures is governed by the effective release height calculation described in Section 7.9.4. A linear interpolation is used for effluent release heights that fall in between the given curves.

x = downwind distance, m.

n = number of sectors, 16.

$2\pi x/n$ = sector width at point of interest, m.

7.9.4 Effective Release Height

For effluents exhausted from release points that are higher than twice the height of adjacent structures (elevated releases) the effective release height is determined by the following equation, consistent with Regulatory Guide 1.111

$$h_e = h_s + h_{pr} - h_t - c$$

where:

c = downwash correction factor for low relative exit velocity,
 $= 3(1.5 - W_o/u)d$,

where:

W_o = the vertical plume exit velocity, m/s.

u = mean wind speed at 93m, m/s.

d = inside diameter of the release point, m.

NOTE: If c is less than zero, it is set equal to zero.

h_{pr} = plume rise above the release point, m.

h_s = physical height of release point, m.

h_t = maximum terrain height between release point and receptor location,
m.

For effluents released from points less than the height of adjacent structures, a ground level release is assumed ($h_e = 0$).

For effluents released from points at the level of or above adjacent structures, but lower than elevated release points, releases are treated as split-level as follows:

Case 1 - elevated if $W_o/u \geq 5$.

Case 2 - ground level ($h_e = 0$) if $W_o/u \leq 1$.

Case 3 - mixed mode if $1 < W_o/u < 5$.

where:

u = mean wind speed at 46m, m/s.

Under the split-level dispersion approach, a model that requires two JFDs (one for elevated releases and one for ground level releases) is used. The summation of the elevated and ground level JFDs account for the total period of record. For Case 3 (mixed-mode), releases are considered to be elevated $100(1 - E_t)$ percent of the time and ground level $100 E_t$ percent of the time where the entrainment coefficient, E_t , is defined by

$$E_t = 2.58 - 1.58(W_o/u) \text{ for } 1 < W_o/u \leq 1.5$$

$$E_t = 0.3 - 0.06(W_o/u) \text{ for } 1.5 < W_o/u \leq 5$$

Table 7.1
BFN - OFFSITE RECEPTOR LOCATION DATA

Dir./	Dist.	Elev. above plant grade (m)	Ground Vent		Mixed Vent		Elevated Vent	
			χ/Q (s/m ³)	D/Q (1/m ²)	χ/Q (s/m ³)	D/Q (1/m ²)	χ/Q (s/m ³)	D/Q (1/m ²)
N	1525	7	1.91E-06	5.77E-09	3.88E-07	2.19E-09	4.46E-10	4.99E-10
NNE	1300	4	1.06E-06	2.69E-09	1.65E-07	1.12E-09	3.99E-10	3.17E-10
NE	1250	7	7.13E-07	1.89E-09	1.35E-07	8.90E-10	1.64E-09	3.65E-10
ENE	1450	0	9.08E-07	3.15E-09	1.20E-07	9.36E-10	1.22E-09	3.37E-10
E	1375	0	9.21E-07	3.81E-09	1.50E-07	1.37E-09	8.36E-10	4.25E-10
ESE	1575	0	5.19E-07	3.09E-09	1.25E-07	1.43E-09	4.84E-10	4.78E-10
SE	5600	-6	9.61E-08	3.50E-10	4.30E-08	2.69E-10	5.15E-09	2.14E-10
SSE	2875	-6	5.20E-07	1.57E-09	9.78E-08	7.40E-10	1.13E-09	3.96E-10
S	2250	-6	1.21E-06	2.93E-09	1.54E-07	1.14E-09	4.39E-10	5.11E-10
SSW	2425	-6	1.28E-06	2.88E-09	1.74E-07	1.10E-09	6.10E-10	4.29E-10
SW	2300	-6	8.33E-07	1.71E-09	1.02E-07	5.22E-10	2.55E-10	2.21E-10
WSW	2500	-6	8.17E-07	1.21E-09	7.00E-08	2.15E-10	2.61E-10	1.14E-10
W	2550	-6	8.51E-07	1.43E-09	6.95E-08	2.40E-10	2.63E-10	1.18E-10
WNW	3325	-6	4.14E-07	7.87E-10	1.04E-07	3.33E-10	1.75E-09	2.50E-10
NW	2275	-6	1.90E-06	4.65E-09	3.22E-07	1.53E-09	1.83E-09	6.17E-10
NNW	1650	-6	2.26E-06	5.42E-09	3.63E-07	2.12E-09	8.93E-10	5.54E-10
NW	8500	-6	3.04E-07	4.60E-10	9.90E-08	2.05E-10	8.93E-09	1.37E-10

NOTE: For quarterly dose calculations, doses will also be calculated for all locations identified in the most recent land use census, and for any additional points deemed necessary.

Table 7.2
EXPECTED ANNUAL ROUTINE ATMOSPHERIC RELEASES FROM ONE UNIT AT BFN

Isotope	Building Vents (Ci/y/Unit)			Stack (Ci/y/Unit)	
	Reactor Complex Vent	Radwaste Building Vent	Turbine Building Vent	Gland Seal and Offgas	MVP
Kr-85m	6E+0	< 1	2E+0	1.66E+4	0.0E+0
Kr-85	-	-	-	6.3E+2	-
Kr-87	6E+0	< 1	9.5E+1	7.47E+2	0.0E+0
Kr-88	9E+0	< 1	1.02E+2	1.35E+4	0.0E+0
Kr-89	1E+0	3.4E+1	5.03E+2	4.10E+3	0.0E+0
Xe-131m	-	-	-	3.09E+2	0.0E+0
Xe-133m	0E+0	6.0E+1	0E+0	8.51E+2	0.0E+0
Xe-133	1.03E+2	2.94E+2	5.81E+2	9.47E+4	3.0E+2
Xe-135m	1.11E+2	6.67E+2	4.64E+2	9.17E+2	0.0E+0
Xe-135	1.73E+2	3.28E+2	6.72E+2	5.99E+2	2.0E+2
Xe-137	7.8E+1	1.13E+2	3.86E+2	5.04E+3	0.0E+0
Xe-138	1.2E+1	2E+0	1.18E+3	3.15E+3	0.0E+0
I-131 I	5.94E-2	5.0E-3	1.56E-2	4.1E-3	8.5E-3
I-132 I	5.94E-1	5.0E-2	1.79E-1	4.69E-2	9.73E-2
I-133 I	2.97E-1	2.5E-2	1.23E-1	3.23E-2	6.71E-2
I-134 I	1.49E+0	1.25E-1	2.67E-2	7.0E-3	1.45E-2
I-135 I	5.94E-1	5.0E-2	1.23E-1	3.23E-2	6.71E-2
I-131 O	3.16E-2	2.9E-2	6.5E-3	3.32E-2	2.74E-1
I-132 O	3.16E-1	2.9E-1	7.44E-2	3.80E-1	3.14E+0
I-133 O	1.58E-1	1.45E-1	5.13E-2	2.62E-1	2.16E+0
I-134 O	7.90E-1	7.25E-1	1.11E-2	5.68E-2	4.69E-1
I-135 O	3.16E-1	2.90E-1	5.13E-2	2.61E-1	2.16E+0
Cr-51	3E-3	9E-4	1E-3	1E-4	0.0E+0
Mn-54	3E-3	5E-3	2E-3	4E-5	0.0E+0
Co-58	2E-3	4E-4	9E-5	2E-5	0.0E+0
Fe-59	1E-4	8E-4	4E-4	2E-4	0.0E+0
Co-60	3E-2	6E-3	3E-3	1E-5	0.0E+0
Zn-65	3E-3	2E-4	4E-4	9E-5	0.0E+0
Sr-89	1E-2	3E-1	*	*	0.0E+0
Sr-90	2E-3	4E-3	*	*	0.0E+0
Nb-95	3E-4	2E-4	9E-6	8E-5	0.0E+0
Zr-95	1E-4	1E-4	8E-6	8E-5	0.0E+0
Ru-103	3E-5	1E-4	2E-4	1E-4	0.0E+0
Ag-110m	7E-6	*	*	*	0.0E+0
Sb-124	3E-5	3E-4	6E-5	8E-5	0.0E+0
Cs-134	5E-3	3E-4	5E-4	2E-5	0.0E+0
Cs-136	2E-3	5E-5	1E-4	9E-8	0.0E+0
Cs-137	7E-3	4E-4	2E-3	7E-4	0.0E+0
Ba-140	4E-3	5E-4	2E-2	8E-3	0.0E+0
Ce-141	4E-4	2E-4	2E-3	2E-5	0.0E+0
Ce-144	5E-6	*	*	4E-6	0.0E+0
Ar-41	2.5E+1	0E+0	0E+0	0E+0	0.0E+0
C-14	0E+0	0E+0	0E+0	9.5E+0	0.0E+0
H-3	0E+0	9.5E+0	0E+0	0E+0	0.0E+0

* Not available.

I denotes nonorganic iodine (elemental, particulate, HIO)

O denotes organic iodine.

Table 7.3 (1 of 28)
JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION
Ground Level Releases
Stability Class A ($\Delta T \leq -1.9$ degrees C per 100 m)
BROWNS FERRY NUCLEAR PLANT
January 1, 1977 - December 31, 1988

WIND Dir	Calm	Wind Speed (mph)								Total
		0.6- 1.4	1.5- 3.4	3.5- 5.4	5.5- 7.4	7.5- 12.4	12.5- 18.4	18.5- 24.4	\geq 24.5	
N	0.0	0.0	0.0	0.010	0.026	0.281	0.122	0.005	0.0	0.444
NNE	0.0	0.0	0.001	0.009	0.038	0.284	0.109	0.001	0.0	0.443
NE	0.0	0.0	0.001	0.007	0.024	0.075	0.015	0.0	0.0	0.122
ENE	0.0	0.0	0.001	0.003	0.006	0.004	0.0	0.0	0.0	0.014
E	0.0	0.0	0.001	0.004	0.007	0.006	0.0	0.0	0.0	0.018
ESE	0.0	0.0	0.006	0.061	0.093	0.014	0.0	0.0	0.0	0.173
SE	0.0	0.001	0.106	1.205	0.366	0.044	0.0	0.0	0.0	1.721
SSE	0.0	0.0	0.132	0.672	0.115	0.015	0.0	0.0	0.0	0.934
S	0.0	0.0	0.069	0.557	0.112	0.033	0.0	0.0	0.0	0.772
SSW	0.0	0.0	0.018	0.142	0.057	0.011	0.0	0.0	0.0	0.227
SW	0.0	0.0	0.008	0.097	0.042	0.005	0.0	0.0	0.0	0.152
WSW	0.0	0.0	0.0	0.055	0.084	0.050	0.004	0.0	0.0	0.193
W	0.0	0.0	0.001	0.014	0.046	0.065	0.007	0.001	0.0	0.133
WNW	0.0	0.0	0.0	0.020	0.037	0.115	0.067	0.007	0.0	0.246
NW	0.0	0.0	0.0	0.005	0.032	0.191	0.144	0.004	0.0	0.375
NNW	0.0	0.0	0.0	0.007	0.012	0.107	0.102	0.019	0.0	0.245
Sub total	0.0	0.001	0.343	2.865	1.098	1.298	0.570	0.036	0.0	6.211

Total hours of valid stability observations - 103468
Total hours of stability class A - 6379
Total hours of valid wind direction-wind speed-stability class A - 6354
Total hours of valid wind direction-wind speed-stability observations - 102303

Meteorological facility: located 1.3 km ESE of BFN
Stability based on ΔT measured between 10.03 and 45.30 meters
Wind speed and direction measured at the 10.42 meter level

Mean wind speed = 6.81 mph

Table 7.3 (2 of 28)
JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION
Ground Level Releases
Stability Class B ($-1.9 < \Delta T \leq -1.7$ degrees C per 100 m)
BROWNS FERRY NUCLEAR PLANT
January 1, 1977 - December 31, 1988

WIND Dir	Calm	Wind Speed (mph)								Total
		0.6- 1.4	1.5- 3.4	3.5- 5.4	5.5- 7.4	7.5- 12.4	12.5- 18.4	18.5- 24.4	\geq 24.5	
N	0.0	0.0	0.002	0.021	0.072	0.212	0.044	0.002	0.0	0.353
NNE	0.0	0.0	0.001	0.030	0.093	0.237	0.047	0.0	0.0	0.408
NE	0.0	0.0	0.002	0.024	0.034	0.080	0.007	0.0	0.0	0.148
ENE	0.0	0.0	0.002	0.010	0.008	0.008	0.0	0.0	0.0	0.027
E	0.0	0.0	0.002	0.011	0.007	0.001	0.001	0.0	0.0	0.022
ESE	0.0	0.0	0.013	0.052	0.021	0.011	0.0	0.0	0.0	0.096
SE	0.0	0.0	0.153	0.445	0.053	0.015	0.0	0.0	0.0	0.666
SSE	0.0	0.0	0.130	0.216	0.023	0.012	0.0	0.0	0.0	0.381
S	0.0	0.0	0.072	0.264	0.039	0.012	0.0	0.0	0.0	0.387
SSW	0.0	0.0	0.027	0.104	0.016	0.002	0.002	0.0	0.0	0.151
SW	0.0	0.0	0.013	0.125	0.025	0.007	0.0	0.0	0.0	0.170
WSW	0.0	0.0	0.005	0.088	0.087	0.044	0.008	0.0	0.0	0.232
W	0.0	0.0	0.005	0.024	0.090	0.082	0.016	0.001	0.0	0.218
WNW	0.0	0.0	0.002	0.044	0.075	0.164	0.071	0.018	0.0	0.374
NW	0.0	0.0	0.001	0.014	0.055	0.236	0.087	0.006	0.0	0.398
NNW	0.0	0.0	0.0	0.007	0.036	0.171	0.058	0.003	0.0	0.275
Sub										
total	0.0	0.0	0.430	1.478	0.734	1.292	0.340	0.029	0.0	4.304

Total hours of valid stability observations - 103468
Total hours of stability class B - 4424
Total hours of valid wind direction-wind speed-stability class B - 4403
Total hours of valid wind direction-wind speed-stability observations - 102303

Meteorological facility: located 1.3 km ESE of BFN
Stability based on ΔT measured between 10.03 and 45.30 meters
Wind speed and direction measured at the 10.42 meter level

Mean wind speed = 7.04 mph

Table 7.3 (3 of 28)
JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION
Ground Level Releases
Stability Class C ($-1.7 < \Delta T \leq -1.5$ degrees C per 100 m)
BROWNS FERRY NUCLEAR PLANT
January 1, 1977 - December 31, 1988

WIND Dir	Calm	Wind Speed (mph)								Total
		0.6- 1.4	1.5- 3.4	3.5- 5.4	5.5- 7.4	7.5- 12.4	12.5- 18.4	18.5- 24.4	\geq 24.5	
N	0.0	0.0	0.011	0.055	0.122	0.231	0.030	0.002	0.0	0.451
NNE	0.0	0.0	0.008	0.062	0.115	0.202	0.027	0.0	0.0	0.414
NE	0.0	0.0	0.002	0.042	0.080	0.086	0.007	0.0	0.0	0.217
ENE	0.0	0.0	0.004	0.021	0.011	0.011	0.0	0.0	0.0	0.046
E	0.0	0.0	0.004	0.020	0.016	0.003	0.001	0.0	0.0	0.043
ESE	0.0	0.0	0.008	0.048	0.018	0.004	0.0	0.0	0.0	0.077
SE	0.0	0.001	0.213	0.313	0.057	0.013	0.002	0.0	0.0	0.598
SSE	0.0	0.0	0.188	0.166	0.022	0.009	0.0	0.0	0.0	0.385
S	0.0	0.0	0.146	0.232	0.044	0.013	0.0	0.0	0.0	0.434
SSW	0.0	0.0	0.042	0.109	0.014	0.002	0.0	0.0	0.0	0.167
SW	0.0	0.001	0.053	0.143	0.025	0.005	0.001	0.0	0.0	0.228
WSW	0.0	0.0	0.013	0.140	0.079	0.072	0.006	0.001	0.0	0.311
W	0.0	0.0	0.003	0.048	0.103	0.088	0.022	0.004	0.0	0.267
WNW	0.0	0.0	0.009	0.096	0.109	0.197	0.079	0.027	0.0	0.518
NW	0.0	0.0	0.002	0.054	0.108	0.211	0.067	0.004	0.001	0.447
NNW	0.0	0.0	0.003	0.016	0.058	0.182	0.055	0.002	0.0	0.315
Sub total	0.0	0.002	0.707	1.562	0.980	1.328	0.297	0.040	0.001	4.918

Total hours of valid stability observations - 103468
Total hours of stability class C - 5065
Total hours of valid wind direction-wind speed-stability class C - 5031
Total hours of valid wind direction-wind speed-stability observations - 102303

Meteorological facility: located 1.3 km ESE of BFN
Stability based on ΔT measured between 10.03 and 45.30 meters
Wind speed and direction measured at the 10.42 meter level

Mean wind speed = 6.67 mph

Table 7.3 (4 of 28)
JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION
Ground Level Releases
Stability Class D ($-1.5 < \Delta T \leq -0.5$ degrees C per 100 m)
BROWNS FERRY NUCLEAR PLANT
January 1, 1977 - December 31, 1988

WIND Dir	Calm	Wind Speed (mph)								Total
		0.6- 1.4	1.5- 3.4	3.5- 5.4	5.5- 7.4	7.5- 12.4	12.5- 18.4	18.5- 24.4	\geq 24.5	
N	0.0	0.016	0.212	0.471	0.584	1.151	0.368	0.029	0.001	2.832
NNE	0.0	0.013	0.227	0.519	0.647	1.156	0.190	0.009	0.0	2.761
NE	0.0	0.014	0.195	0.429	0.446	0.461	0.022	0.0	0.0	1.566
ENE	0.001	0.015	0.247	0.346	0.185	0.106	0.004	0.0	0.0	0.903
E	0.001	0.010	0.264	0.435	0.250	0.125	0.008	0.0	0.0	1.092
ESE	0.001	0.013	0.258	0.437	0.241	0.078	0.001	0.0	0.0	1.029
SE	0.003	0.051	1.498	1.203	0.648	0.294	0.005	0.0	0.0	3.702
SSE	0.003	0.031	1.300	0.823	0.228	0.105	0.004	0.0	0.0	2.493
S	0.002	0.029	1.132	1.031	0.290	0.152	0.016	0.001	0.0	2.653
SSW	0.001	0.030	0.624	0.421	0.097	0.053	0.002	0.0	0.0	1.228
SW	0.001	0.018	0.370	0.339	0.065	0.027	0.003	0.001	0.0	0.825
WSW	0.001	0.015	0.456	0.767	0.380	0.331	0.056	0.001	0.0	2.007
W	0.0	0.006	0.220	0.644	0.697	0.651	0.138	0.016	0.0	2.372
WNW	0.0	0.007	0.140	0.444	0.518	1.008	0.637	0.152	0.009	2.914
NW	0.0	0.008	0.090	0.316	0.436	0.815	0.617	0.093	0.011	2.385
NNW	0.0	0.005	0.134	0.363	0.480	1.196	0.568	0.033	0.001	2.780
Sub total	0.015	0.279	7.365	8.989	6.192	7.710	2.636	0.334	0.022	33.543

Total hours of valid stability observations - 103468

Total hours of stability class D - 34636

Total hours of valid wind direction-wind speed-stability class D - 34315

Total hours of valid wind direction-wind speed-stability observations - 102303

Meteorological facility: located 1.3 km ESE of BFN

Stability based on ΔT measured between 10.03 and 45.30 meters

Wind speed and direction measured at the 10.42 meter level

Mean wind speed = 6.51 mph

Table 7.3 (5 of 28)
JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION
Ground Level Releases
Stability Class E ($-0.5 < \Delta T \leq -1.5$ degrees C per 100 m)
BROWNS FERRY NUCLEAR PLANT
January 1, 1977 - December 31, 1988

WIND Dir	Calm	Wind Speed (mph)								Total
		0.6- 1.4	1.5- 3.4	3.5- 5.4	5.5- 7.4	7.5- 12.4	12.5- 18.4	18.5- 24.4	\geq 24.5	
N	0.005	0.075	0.430	0.529	0.404	0.371	0.062	0.003	0.0	1.879
NNE	0.006	0.084	0.506	0.580	0.497	0.413	0.031	0.002	0.0	2.119
NE	0.006	0.113	0.494	0.491	0.369	0.193	0.009	0.0	0.0	1.674
ENE	0.007	0.109	0.642	0.417	0.160	0.037	0.005	0.001	0.0	1.380
E	0.008	0.071	0.744	0.677	0.174	0.065	0.004	0.0	0.0	1.744
ESE	0.009	0.099	0.821	0.772	0.350	0.121	0.002	0.0	0.0	2.174
SE	0.022	0.268	1.942	1.323	0.679	0.328	0.017	0.0	0.0	4.579
SSE	0.013	0.197	1.120	0.695	0.367	0.251	0.030	0.001	0.0	2.675
S	0.012	0.161	1.016	0.688	0.494	0.559	0.084	0.003	0.0	3.016
SSW	0.007	0.114	0.547	0.221	0.098	0.101	0.005	0.0	0.0	1.093
SW	0.004	0.084	0.292	0.082	0.023	0.013	0.0	0.0	0.0	0.498
WSW	0.007	0.060	0.641	0.514	0.109	0.098	0.019	0.0	0.0	1.448
W	0.005	0.044	0.463	0.676	0.299	0.152	0.016	0.0	0.0	1.656
WNW	0.002	0.025	0.168	0.153	0.133	0.158	0.053	0.004	0.0	0.697
NW	0.002	0.037	0.183	0.259	0.176	0.271	0.080	0.006	0.0	1.014
NNW	0.004	0.060	0.392	0.508	0.459	0.530	0.085	0.004	0.001	2.044
Sub total	0.119	1.603	10.402	8.586	4.791	3.663	0.500	0.023	0.001	29.689

Total hours of valid stability observations - 103468
Total hours of stability class E - 30806
Total hours of valid wind direction-wind speed-stability class E - 30373
Total hours of valid wind direction-wind speed-stability observations - 102303

Meteorological facility: located 1.3 km ESE of BFN
Stability based on ΔT measured between 10.03 and 45.30 meters
Wind speed and direction measured at the 10.42 meter level

Mean wind speed = 4.61 mph

Table 7.3 (6 of 28)
JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION
Ground Level Releases
Stability Class F ($1.5 < \Delta\text{-T} \leq 4.0$ degrees C per 100 m)
BROWNS FERRY NUCLEAR PLANT
January 1, 1977 - December 31, 1988

WIND Dir	Calm	Wind Speed (mph)								Total
		0.6- 1.4	1.5- 3.4	3.5- 5.4	5.5- 7.4	7.5- 12.4	12.5- 18.4	18.5- 24.4	\geq 24.5	
N	0.012	0.113	0.450	0.449	0.240	0.056	0.0	0.0	0.0	1.319
NNE	0.013	0.144	0.499	0.572	0.324	0.094	0.0	0.0	0.0	1.646
NE	0.009	0.114	0.334	0.238	0.122	0.016	0.0	0.0	0.0	0.833
ENE	0.014	0.121	0.564	0.301	0.038	0.004	0.0	0.0	0.0	1.042
E	0.018	0.052	0.831	0.499	0.014	0.0	0.0	0.0	0.0	1.413
ESE	0.012	0.071	0.536	0.119	0.006	0.004	0.0	0.0	0.0	0.749
SE	0.025	0.209	1.021	0.359	0.146	0.066	0.003	0.001	0.0	1.831
SSE	0.014	0.123	0.573	0.309	0.173	0.184	0.018	0.002	0.0	1.395
S	0.008	0.077	0.315	0.218	0.224	0.223	0.013	0.001	0.0	1.078
SSW	0.003	0.052	0.108	0.027	0.008	0.007	0.0	0.0	0.0	0.205
SW	0.003	0.030	0.110	0.014	0.003	0.001	0.0	0.0	0.0	0.161
WSW	0.003	0.027	0.109	0.038	0.001	0.002	0.0	0.0	0.0	0.181
W	0.003	0.026	0.098	0.062	0.006	0.003	0.0	0.0	0.0	0.197
WNW	0.002	0.028	0.080	0.023	0.007	0.005	0.0	0.0	0.0	0.146
NW	0.003	0.033	0.109	0.042	0.022	0.009	0.0	0.0	0.0	0.218
NNW	0.008	0.072	0.302	0.276	0.164	0.044	0.0	0.0	0.0	0.866
Sub total	0.151	1.295	6.040	3.544	1.497	0.716	0.033	0.004	0.0	13.280

Total hours of valid stability observations - 103468

Total hours of stability class F - 13774

Total hours of valid wind direction-wind speed-stability class F - 13586

Total hours of valid wind direction-wind speed-stability observations - 102303

Meteorological facility: located 1.3 km ESE of BFN

Stability based on $\Delta\text{-T}$ measured between 10.03 and 45.30 meters

Wind speed and direction measured at the 10.42 meter level

Mean wind speed = 3.60 mph

Table 7.3 (7 of 28)
JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION
Ground Level Releases
Stability Class G (Delta-T > 4.0 degrees C per 100 m)
BROWNS FERRY NUCLEAR PLANT
January 1, 1977 - December 31, 1988

WIND Dir	Calm	Wind Speed (mph)								Total
		0.6- 1.4	1.5- 3.4	3.5- 5.4	5.5- 7.4	7.5- 12.4	12.5- 18.4	18.5- 24.4	\geq 24.5	
N	0.023	0.178	0.699	0.277	0.043	0.002	0.0	0.0	0.0	1.221
NNE	0.025	0.190	0.752	0.550	0.166	0.012	0.0	0.0	0.0	1.694
NE	0.013	0.118	0.369	0.073	0.021	0.001	0.0	0.0	0.0	0.594
ENE	0.015	0.084	0.492	0.168	0.013	0.001	0.0	0.0	0.0	0.773
E	0.013	0.029	0.471	0.280	0.001	0.0	0.0	0.0	0.0	0.794
ESE	0.004	0.020	0.121	0.005	0.0	0.0	0.0	0.0	0.0	0.149
SE	0.013	0.106	0.373	0.069	0.047	0.010	0.0	0.0	0.0	0.618
SSE	0.015	0.095	0.467	0.326	0.120	0.052	0.0	0.0	0.0	1.075
S	0.005	0.068	0.111	0.128	0.065	0.029	0.0	0.0	0.0	0.407
SSW	0.002	0.036	0.034	0.002	0.0	0.0	0.0	0.0	0.0	0.074
SW	0.001	0.025	0.015	0.003	0.0	0.0	0.0	0.0	0.0	0.044
WSW	0.001	0.012	0.016	0.002	0.0	0.0	0.0	0.0	0.0	0.030
W	0.001	0.012	0.019	0.003	0.0	0.0	0.0	0.0	0.0	0.034
WNW	0.001	0.020	0.028	0.001	0.0	0.0	0.0	0.0	0.0	0.050
NW	0.003	0.039	0.061	0.003	0.0	0.0	0.0	0.0	0.0	0.105
NNW	0.007	0.086	0.200	0.075	0.022	0.001	0.0	0.0	0.0	0.392
Sub total	0.140	1.117	4.228	1.966	0.498	0.108	0.0	0.0	0.0	8.055

Total hours of valid stability observations - 103468

Total hours of stability class G - 8384

Total hours of valid wind direction-wind speed-stability class G - 8241

Total hours of valid wind direction-wind speed-stability observations - 102303

Meteorological facility: located 1.3 km ESE of BFN

Stability based on Delta-T measured between 10.03 and 45.30 meters

Wind speed and direction measured at the 10.42 meter level

Mean wind speed = 2.95 mph

Table 7.3 (8 of 28)
JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION
Stack Releases
Stability Class A ($\Delta T \leq -1.9$ degrees C per 100 m)
BROWNS FERRY NUCLEAR PLANT
January 1, 1977 - December 31, 1988

WIND Dir	Calm	Wind Speed (mph)								Total
		0.6- 1.4	1.5- 3.4	3.5- 5.4	5.5- 7.4	7.5- 12.4	12.5- 18.4	18.5- 24.4	\geq 24.5	
N	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
NNE	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
NE	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
ENE	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
E	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
ESE	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
SE	0.0	0.0	0.001	0.0	0.0	0.0	0.0	0.0	0.0	0.001
SSE	0.0	0.0	0.002	0.002	0.0	0.0	0.001	0.0	0.0	0.005
S	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
SSW	0.0	0.0	0.0	0.001	0.0	0.0	0.0	0.0	0.0	0.001
SW	0.0	0.0	0.0	0.002	0.003	0.002	0.002	0.0	0.0	0.009
WSW	0.0	0.0	0.002	0.001	0.0	0.0	0.002	0.0	0.001	0.006
W	0.0	0.0	0.0	0.0	0.001	0.001	0.0	0.0	0.0	0.002
WNW	0.0	0.0	0.0	0.0	0.0	0.0	0.001	0.0	0.0	0.001
NW	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
NNW	0.0	0.0	0.0	0.0	0.0	0.001	0.0	0.0	0.0	0.001
Sub										
total	0.0	0.0	0.005	0.006	0.004	0.004	0.006	0.0	0.001	0.026

Total hours of valid stability observations - 103166

Total hours of stability class A - 27

Total hours of valid wind direction-wind speed-stability class A - 26

Total hours of valid wind direction-wind speed-stability observations - 101803

Meteorological facility: located 1.3 km ESE of BFN

Stability based on ΔT measured between 45.30 and 89.59 meters

Wind speed and direction measured at the 95.63 meter level

Mean wind speed = 8.66 mph

Table 7.3 (9 of 28)
JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION
Stack Releases
Stability Class B ($-1.9 < \Delta T \leq -1.7$ degrees C per 100 m)
BROWNS FERRY NUCLEAR PLANT
January 1, 1977 - December 31, 1988

WIND Dir	Calm	Wind Speed (mph)								Total
		0.6- 1.4	1.5- 3.4	3.5- 5.4	5.5- 7.4	7.5- 12.4	12.5- 18.4	18.5- 24.4	\geq 24.5	
N	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
NNE	0.0	0.0	0.0	0.001	0.0	0.001	0.0	0.0	0.0	0.002
NE	0.0	0.0	0.0	0.001	0.0	0.0	0.0	0.0	0.0	0.001
ENE	0.0	0.0	0.001	0.0	0.0	0.002	0.0	0.0	0.0	0.003
E	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
ESE	0.0	0.0	0.001	0.003	0.001	0.005	0.004	0.001	0.0	0.015
SE	0.0	0.0	0.008	0.007	0.002	0.002	0.001	0.0	0.0	0.020
SSE	0.0	0.0	0.008	0.005	0.002	0.0	0.0	0.0	0.0	0.015
S	0.0	0.0	0.001	0.002	0.002	0.0	0.0	0.0	0.0	0.005
SSW	0.0	0.0	0.001	0.005	0.001	0.004	0.0	0.0	0.0	0.011
SW	0.0	0.0	0.003	0.016	0.010	0.013	0.007	0.002	0.0	0.050
WSW	0.0	0.0	0.002	0.009	0.004	0.008	0.003	0.0	0.002	0.028
W	0.0	0.0	0.0	0.0	0.004	0.008	0.013	0.004	0.001	0.029
WNW	0.0	0.0	0.0	0.0	0.002	0.002	0.001	0.001	0.0	0.006
NW	0.0	0.0	0.0	0.0	0.000	0.001	0.0	0.0	0.0	0.001
NNW	0.0	0.0	0.0	0.0	0.000	0.0	0.0	0.0	0.0	0.0
Sub total	0.0	0.0	0.025	0.048	0.028	0.045	0.028	0.008	0.003	0.185

Total hours of valid stability observations - 103166

Total hours of stability class B - 190

Total hours of valid wind direction-wind speed-stability class B - 188

Total hours of valid wind direction-wind speed-stability observations - 101803

Meteorological facility: located 1.3 km ESE of BFN

Stability based on Delta-T measured between 45.30 and 89.59 meters

Wind speed and direction measured at the 92.63 meter level

Mean wind speed = 8.57 mph

Table 7.3 (10 of 28)
JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION
Stack Releases
Stability Class C ($-1.7 < \Delta-T \leq -1.5$ degrees C per 100 m)
BROWNS FERRY NUCLEAR PLANT
January 1, 1977 - December 31, 1988

WIND Dir	Calm	Wind Speed (mph)								Total
		0.6- 1.4	1.5- 3.4	3.5- 5.4	5.5- 7.4	7.5- 12.4	12.5- 18.4	18.5- 24.4	\geq 24.5	
N	0.0	0.0	0.0	0.0	0.0	0.0	0.001	0.001	0.0	0.002
NNE	0.0	0.0	0.0	0.0	0.002	0.0	0.002	0.001	0.0	0.005
NE	0.0	0.0	0.0	0.0	0.001	0.002	0.0	0.0	0.0	0.003
ENE	0.0	0.0	0.001	0.001	0.0	0.003	0.004	0.0	0.0	0.009
E	0.0	0.0	0.0	0.002	0.002	0.003	0.0	0.0	0.001	0.008
ESE	0.0	0.0	0.003	0.009	0.008	0.020	0.013	0.003	0.001	0.056
SE	0.0	0.0	0.018	0.056	0.022	0.015	0.004	0.0	0.0	0.114
SSE	0.0	0.001	0.018	0.027	0.010	0.005	0.0	0.0	0.0	0.060
S	0.0	0.0	0.011	0.013	0.007	0.002	0.0	0.0	0.0	0.032
SSW	0.0	0.0	0.010	0.008	0.004	0.011	0.002	0.0	0.0	0.034
SW	0.0	0.0	0.019	0.045	0.028	0.038	0.019	0.003	0.0	0.152
WSW	0.0	0.0	0.010	0.037	0.033	0.038	0.021	0.005	0.001	0.145
W	0.0	0.0	0.002	0.014	0.022	0.058	0.034	0.011	0.014	0.154
WNW	0.0	0.0	0.002	0.0	0.011	0.035	0.031	0.010	0.005	0.094
NW	0.0	0.0	0.0	0.001	0.001	0.001	0.017	0.001	0.001	0.022
NNW	0.0	0.0	0.0	0.0	0.0	0.001	0.001	0.0	0.0	0.002
Sub total	0.0	0.001	0.092	0.212	0.150	0.232	0.148	0.034	0.023	0.893

Total hours of valid stability observations - 103166
Total hours of stability class C - 916
Total hours of valid wind direction-wind speed-stability class C - 909
Total hours of valid wind direction-wind speed-stability observations - 101803

Meteorological facility: located 1.3 km ESE of BFN
Stability based on $\Delta-T$ measured between 45.30 and 89.59 meters
Wind speed and direction measured at the 92.63 meter level

Mean wind speed = 8.90 mph

Table 7.3 (11 of 28)
JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION
Stack Releases
Stability Class D (-1.5 < Delta-T ≤ 0.5 degrees C per 100 m)
BROWNS FERRY NUCLEAR PLANT
January 1, 1977 - December 31, 1988

WIND Dir	Calm	Wind Speed (mph)								Total
		0.6- 1.4	1.5- 3.4	3.5- 5.4	5.5- 7.4	7.5- 12.4	12.5- 18.4	18.5- 24.4	≥ 24.5	
N	0.001	0.010	0.100	0.270	0.468	1.721	1.698	0.468	0.062	4.797
NNE	0.001	0.020	0.098	0.258	0.455	1.685	1.334	0.211	0.020	4.081
NE	0.0	0.010	0.070	0.203	0.364	0.952	0.438	0.035	0.006	2.079
ENE	0.001	0.009	0.088	0.194	0.221	0.396	0.134	0.023	0.009	1.074
E	0.001	0.009	0.122	0.202	0.206	0.339	0.190	0.042	0.013	1.123
ESE	0.001	0.009	0.173	0.336	0.374	0.844	0.691	0.239	0.058	2.724
SE	0.001	0.015	0.265	0.729	0.712	1.364	1.288	0.804	0.337	5.516
SSE	0.002	0.018	0.319	0.581	0.568	1.442	1.293	0.551	0.249	5.021
S	0.001	0.009	0.277	0.491	0.463	1.321	1.336	0.738	0.300	4.936
SSW	0.001	0.015	0.222	0.348	0.344	0.935	0.914	0.423	0.166	3.368
SW	0.001	0.013	0.254	0.453	0.340	0.760	0.712	0.219	0.091	2.844
WSW	0.001	0.009	0.194	0.556	0.397	0.641	0.541	0.246	0.093	2.679
W	0.001	0.008	0.129	0.525	0.630	1.103	0.759	0.316	0.173	3.643
WNW	0.001	0.004	0.108	0.262	0.497	1.481	1.124	0.608	0.260	4.345
NW	0.001	0.012	0.121	0.298	0.458	1.244	1.380	0.842	0.219	4.573
NNW	0.001	0.010	0.098	0.201	0.312	1.184	1.467	0.534	0.117	3.924
Sub total	0.015	0.177	2.639	5.907	6.808	17.412	15.297	6.299	2.172	56.727

Total hours of valid stability observations - 103166
Total hours of stability class D - 58662
Total hours of valid wind direction-wind speed-stability class D - 57750
Total hours of valid wind direction-wind speed-stability observations - 101803

Meteorological facility: located 1.3 km ESE of BFN
Stability based on Delta-T measured between 45.30 and 89.59 meters
Wind speed and direction measured at the 92.63 meter level

Mean wind speed = 11.90 mph

Table 7.3 (12 of 28)
JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION
Stack Releases
Stability Class E ($0.5 < \Delta\text{-T} \leq 1.5$ degrees C per 100 m)
BROWNS FERRY NUCLEAR PLANT
January 1, 1977 - December 31, 1988

WIND Dir	Calm	Wind Speed (mph)								Total
		0.6- 1.4	1.5- 3.4	3.5- 5.4	5.5- 7.4	7.5- 12.4	12.5- 18.4	18.5- 24.4	\geq 24.5	
N	0.001	0.013	0.066	0.099	0.149	0.537	0.735	0.139	0.005	1.744
NNE	0.001	0.007	0.061	0.080	0.134	0.614	0.836	0.202	0.002	1.936
NE	0.002	0.011	0.075	0.107	0.161	0.640	0.686	0.176	0.001	1.858
ENE	0.001	0.006	0.063	0.103	0.122	0.443	0.328	0.071	0.005	1.142
E	0.002	0.010	0.097	0.162	0.199	0.461	0.173	0.026	0.003	1.133
ESE	0.003	0.014	0.129	0.179	0.252	0.671	0.696	0.173	0.027	2.143
SE	0.003	0.009	0.152	0.381	0.429	1.259	1.286	0.609	0.282	4.411
SSE	0.003	0.019	0.150	0.369	0.465	1.114	1.080	0.550	0.256	4.006
S	0.003	0.015	0.143	0.293	0.365	0.927	0.975	0.369	0.108	3.199
SSW	0.002	0.014	0.116	0.155	0.188	0.595	0.712	0.215	0.024	2.021
SW	0.002	0.008	0.083	0.139	0.193	0.606	0.631	0.117	0.022	1.799
WSW	0.002	0.006	0.086	0.135	0.169	0.493	0.359	0.047	0.014	1.310
W	0.001	0.007	0.071	0.132	0.190	0.469	0.271	0.041	0.003	1.184
WNW	0.002	0.013	0.079	0.143	0.184	0.474	0.206	0.033	0.002	1.136
NW	0.002	0.012	0.084	0.159	0.162	0.378	0.282	0.089	0.004	1.173
NNW	0.002	0.009	0.079	0.099	0.165	0.372	0.443	0.092	0.001	1.202
Sub total	0.032	0.170	1.533	2.736	3.466	10.055	9.698	2.950	0.757	31.398

Total hours of valid stability observations - 103166
Total hours of stability class E - 32314
Total hours of valid wind direction-wind speed-stability class E - 31964
Total hours of valid wind direction-wind speed-stability observations - 101803

Meteorological facility: located 1.3 km ESE of BFN
Stability based on $\Delta\text{-T}$ measured between 45.30 and 89.59 meters
Wind speed and direction measured at the 92.63 meter level

Mean wind speed = 11.74 mph

Table 7.3 (13 of 28)
JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION
Stack Releases
Stability Class F ($1.5 < \Delta\text{-T} \leq 4.0$ degrees C per 100 m)
BROWNS FERRY NUCLEAR PLANT
January 1, 1977 - December 31, 1988

WIND Dir	Calm	Wind Speed (mph)								Total
		0.6- 1.4	1.5- 3.4	3.5- 5.4	5.5- 7.4	7.5- 12.4	12.5- 18.4	18.5- 24.4	\geq 24.5	
N	0.001	0.004	0.010	0.026	0.032	0.099	0.181	0.063	0.0	0.415
NNE	0.001	0.003	0.014	0.024	0.019	0.129	0.342	0.181	0.0	0.711
NE	0.001	0.001	0.024	0.029	0.033	0.173	0.346	0.215	0.001	0.823
ENE	0.001	0.002	0.015	0.031	0.045	0.188	0.277	0.097	0.0	0.656
E	0.002	0.003	0.034	0.051	0.086	0.220	0.116	0.003	0.001	0.516
ESE	0.002	0.003	0.038	0.073	0.121	0.341	0.274	0.030	0.001	0.883
SE	0.001	0.006	0.027	0.059	0.121	0.353	0.357	0.031	0.004	0.958
SSE	0.001	0.0	0.028	0.045	0.078	0.287	0.225	0.022	0.001	0.687
S	0.001	0.003	0.030	0.051	0.075	0.194	0.225	0.028	0.0	0.607
SSW	0.001	0.001	0.021	0.042	0.052	0.168	0.212	0.062	0.0	0.559
SW	0.001	0.004	0.026	0.029	0.046	0.168	0.191	0.033	0.0	0.498
WSW	0.001	0.002	0.016	0.031	0.050	0.139	0.144	0.002	0.0	0.386
W	0.001	0.009	0.012	0.047	0.036	0.096	0.042	0.002	0.0	0.245
WNW	0.001	0.002	0.013	0.033	0.038	0.070	0.033	0.0	0.0	0.190
NW	0.001	0.005	0.024	0.039	0.030	0.052	0.016	0.003	0.0	0.170
NNW	0.001	0.004	0.029	0.021	0.025	0.057	0.053	0.018	0.0	0.208
Sub total	0.017	0.051	0.360	0.633	0.888	2.733	3.033	0.791	0.008	8.513

Total hours of valid stability observations - 103166
Total hours of stability class F - 8738
Total hours of valid wind direction-wind speed-stability class F - 8666
Total hours of valid wind direction-wind speed-stability observations - 101803

Meteorological facility: located 1.3 km ESE of BFN
Stability based on Delta-T measured between 45.30 and 89.59 meters
Wind speed and direction measured at the 92.63 meter level

Mean wind speed = 11.66 mph

Table 7.3 (14 of 28)
JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION
Stack Releases
Stability Class G (Delta-T > 4.0 degrees C per 100 m)
BROWNS FERRY NUCLEAR PLANT
January 1, 1977 - December 31, 1988

WIND Dir	Calm	Wind Speed (mph)								Total
		0.6- 1.4	1.5- 3.4	3.5- 5.4	5.5- 7.4	7.5- 12.4	12.5- 18.4	18.5- 24.4	≥ 24.5	
N	0.0	0.005	0.004	0.003	0.004	0.021	0.038	0.006	0.0	0.081
NNE	0.0	0.0	0.002	0.002	0.005	0.041	0.087	0.029	0.002	0.169
NE	0.0	0.001	0.010	0.009	0.007	0.062	0.119	0.061	0.003	0.271
ENE	0.0	0.003	0.006	0.009	0.009	0.060	0.088	0.020	0.001	0.196
E	0.0	0.002	0.011	0.007	0.018	0.089	0.035	0.004	0.0	0.166
ESE	0.0	0.0	0.009	0.024	0.028	0.062	0.055	0.005	0.0	0.183
SE	0.0	0.002	0.013	0.026	0.043	0.118	0.045	0.006	0.0	0.253
SSE	0.0	0.001	0.010	0.020	0.027	0.114	0.082	0.001	0.0	0.254
S	0.0	0.0	0.010	0.019	0.037	0.077	0.038	0.001	0.0	0.182
SSW	0.0	0.0	0.006	0.015	0.021	0.049	0.040	0.005	0.0	0.136
SW	0.0	0.001	0.011	0.013	0.028	0.028	0.052	0.014	0.0	0.148
WSW	0.0	0.001	0.009	0.013	0.008	0.020	0.024	0.002	0.0	0.076
W	0.0	0.0	0.006	0.011	0.008	0.005	0.004	0.0	0.0	0.034
WNW	0.0	0.001	0.013	0.009	0.008	0.005	0.001	0.0	0.0	0.037
NW	0.0	0.001	0.010	0.012	0.009	0.002	0.0	0.0	0.0	0.034
NNW	0.0	0.003	0.008	0.009	0.006	0.006	0.009	0.001	0.0	0.042
Sub										
total	0.0	0.021	0.136	0.197	0.265	0.758	0.718	0.154	0.006	2.259

Total hours of valid stability observations - 103166
Total hours of stability class G - 2319
Total hours of valid wind direction-wind speed-stability class G - 2300
Total hours of valid wind direction-wind speed-stability observations - 101803

Meteorological facility: located 1.3 km ESE of BFN
Stability based on Delta-T measured between 45.30 and 89.59 meters
Wind speed and direction measured at the 92.63 meter level

Mean wind speed = 10.93 mph

Table 7.3 (15 of 28)
JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION
Split Level Releases - Ground Level Portion
Stability Class A ($\Delta T \leq -1.9$ degrees C per 100 m)
BROWNS FERRY NUCLEAR PLANT
January 1, 1977 - December 31, 1988

WIND Dir	Calm	Wind Speed (mph)								Total
		0.6- 1.4	1.5- 3.4	3.5- 5.4	5.5- 7.4	7.5- 12.4	12.5- 18.4	18.5- 24.4	\geq 24.5	
N	0.0	0.0	0.0	0.0	0.002	0.045	0.028	0.004	0.0	0.078
NNE	0.0	0.0	0.0	0.0	0.003	0.044	0.025	0.001	0.0	0.073
NE	0.0	0.0	0.0	0.0	0.002	0.011	0.003	0.0	0.0	0.016
ENE	0.0	0.0	0.0	0.0	0.001	0.001	0.0	0.0	0.0	0.001
E	0.0	0.0	0.0	0.0	0.001	0.001	0.0	0.0	0.0	0.002
ESE	0.0	0.0	0.0	0.003	0.011	0.002	0.0	0.0	0.0	0.017
SE	0.0	0.0	0.001	0.053	0.044	0.009	0.0	0.0	0.0	0.107
SSE	0.0	0.0	0.004	0.046	0.021	0.008	0.0	0.0	0.0	0.078
S	0.0	0.0	0.002	0.033	0.021	0.012	0.0	0.0	0.0	0.068
SSW	0.0	0.0	0.0	0.010	0.009	0.004	0.0	0.0	0.0	0.023
SW	0.0	0.0	0.0	0.003	0.003	0.001	0.0	0.0	0.0	0.007
WSW	0.0	0.0	0.0	0.003	0.010	0.010	0.002	0.0	0.0	0.025
W	0.0	0.0	0.0	0.0	0.004	0.010	0.002	0.001	0.0	0.016
WNW	0.0	0.0	0.0	0.0	0.003	0.017	0.016	0.005	0.0	0.040
NW	0.0	0.0	0.0	0.0	0.002	0.028	0.035	0.002	0.0	0.067
NNW	0.0	0.0	0.0	0.0	0.001	0.017	0.027	0.016	0.0	0.060
Sub total	0.0	0.0	0.008	0.151	0.137	0.218	0.138	0.028	0.0	0.680

Total hours of valid observations - 101961
Total hours of ground level release - 10832.031
Total hours of stability class A - 718.45
Total hours of ground level stability class A - 693.58

Meteorological facility: located 1.3 km ESE of BFN
Stability based on ΔT measured between 10.03 and 45.30 meters
Wind direction measured at 10.42 meter level
Wind speed measured at 10.42 meter level
Effluent velocity - 12.60 m/s

Table 7.3 (16 of 28)
JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION
Split Level Releases - Ground Level Portion
Stability Class B ($-1.9 < \Delta T \leq -1.7$ degrees C per 100 m)
BROWNS FERRY NUCLEAR PLANT
January 1, 1977 - December 31, 1988

WIND Dir	Calm	Wind Speed (mph)								Total
		0.6- 1.4	1.5- 3.4	3.5- 5.4	5.5- 7.4	7.5- 12.4	12.5- 18.4	18.5- 24.4	\geq 24.5	
N	0.0	0.0	0.0	0.0	0.006	0.030	0.010	0.002	0.0	0.048
NNE	0.0	0.0	0.0	0.0	0.007	0.035	0.011	0.0	0.0	0.053
NE	0.0	0.0	0.0	0.0	0.003	0.011	0.002	0.0	0.0	0.016
ENE	0.0	0.0	0.0	0.0	0.001	0.001	0.0	0.0	0.0	0.002
E	0.0	0.0	0.0	0.0	0.001	0.0	0.001	0.0	0.0	0.002
ESE	0.0	0.0	0.0	0.002	0.002	0.002	0.0	0.0	0.0	0.006
SE	0.0	0.0	0.001	0.014	0.007	0.003	0.0	0.0	0.0	0.025
SSE	0.0	0.0	0.001	0.012	0.006	0.008	0.0	0.0	0.0	0.026
S	0.0	0.0	0.001	0.012	0.008	0.004	0.0	0.0	0.0	0.025
SSW	0.0	0.0	0.0	0.006	0.003	0.001	0.002	0.0	0.0	0.012
SW	0.0	0.0	0.0	0.002	0.002	0.002	0.0	0.0	0.0	0.005
WSW	0.0	0.0	0.0	0.004	0.009	0.009	0.003	0.0	0.0	0.024
W	0.0	0.0	0.0	0.0	0.007	0.011	0.006	0.001	0.0	0.025
WNW	0.0	0.0	0.0	0.0	0.005	0.023	0.018	0.013	0.0	0.058
NW	0.0	0.0	0.0	0.0	0.004	0.033	0.021	0.004	0.0	0.062
NNW	0.0	0.0	0.0	0.0	0.002	0.026	0.015	0.002	0.0	0.045
Sub total	0.0	0.0	0.003	0.052	0.072	0.198	0.088	0.022	0.0	0.435

Total hours of valid observations - 101961
Total hours of ground level release - 10832.031
Total hours of stability class B - 618.82
Total hours of ground level stability class B - 443.89

Meteorological facility: located 1.3 km ESE of BFN
Stability based on Delta-T measured between 10.03 and 45.30 meters
Wind direction measured at 10.42 meter level
Wind speed measured at 10.42 meter level
Effluent velocity - 12.60 m/s

Table 7.3 (17 of 28)
JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION
Split Level Releases - Ground Level Portion
Stability Class C ($-1.7 < \Delta T \leq -1.5$ degrees C per 100 m)
BROWNS FERRY NUCLEAR PLANT
January 1, 1977 - December 31, 1988

WIND Dir	Calm	Wind Speed (mph)								Total
		0.6- 1.4	1.5- 3.4	3.5- 5.4	5.5- 7.4	7.5- 12.4	12.5- 18.4	18.5- 24.4	\geq 24.5	
N	0.0	0.0	0.0	0.0	0.009	0.033	0.007	0.001	0.0	0.050
NNE	0.0	0.0	0.0	0.001	0.008	0.028	0.006	0.0	0.0	0.043
NE	0.0	0.0	0.0	0.0	0.006	0.011	0.001	0.0	0.0	0.019
ENE	0.0	0.0	0.0	0.0	0.001	0.002	0.0	0.0	0.0	0.003
E	0.0	0.0	0.0	0.0	0.001	0.001	0.001	0.0	0.0	0.003
ESE	0.0	0.0	0.0	0.002	0.002	0.001	0.0	0.0	0.0	0.005
SE	0.0	0.0	0.002	0.012	0.009	0.004	0.001	0.0	0.0	0.028
SSE	0.0	0.0	0.003	0.007	0.005	0.006	0.0	0.0	0.0	0.021
S	0.0	0.0	0.001	0.012	0.009	0.004	0.0	0.0	0.0	0.026
SSW	0.0	0.0	0.0	0.007	0.002	0.001	0.0	0.0	0.0	0.011
SW	0.0	0.0	0.0	0.002	0.002	0.001	0.001	0.0	0.0	0.006
WSW	0.0	0.0	0.0	0.004	0.009	0.013	0.003	0.001	0.0	0.030
W	0.0	0.0	0.0	0.0	0.008	0.013	0.008	0.004	0.0	0.032
WNW	0.0	0.0	0.0	0.0	0.006	0.028	0.018	0.020	0.0	0.072
NW	0.0	0.0	0.0	0.0	0.007	0.029	0.017	0.002	0.001	0.056
NNW	0.0	0.0	0.0	0.0	0.004	0.026	0.014	0.002	0.0	0.046
Sub total	0.0	0.0	0.006	0.049	0.089	0.201	0.076	0.030	0.001	0.452

Total hours of valid observations - 101961
Total hours of ground level release - 10832.031
Total hours of stability class C - 1307.02
Total hours of ground level stability class C - 460.54

Meteorological facility: located 1.3 km ESE of BFN
Stability based on ΔT measured between 10.03 and 45.30 meters
Wind direction measured at 10.42 meter level
Wind speed measured at 10.42 meter level
Effluent velocity - 12.60 m/s

Table 7.3 (18 of 28)
JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION
Split Level Release - Ground Level Portion
Stability Class D (-1.5 < Delta-T ≤ -0.5 degrees C per 100 m)
BROWNS FERRY NUCLEAR PLANT
January 1, 1977 - December 31, 1988

WIND Dir	Calm	Wind Speed (mph)								Total
		0.6- 1.4	1.5- 3.4	3.5- 5.4	5.5- 7.4	7.5- 12.4	12.5- 18.4	18.5- 24.4	≥ 24.5	
N	0.0	0.0	0.0	0.009	0.050	0.182	0.098	0.023	0.001	0.362
NNE	0.0	0.0	0.0	0.010	0.057	0.178	0.046	0.007	0.0	0.297
NE	0.0	0.0	0.0	0.008	0.038	0.068	0.005	0.0	0.0	0.119
ENE	0.0	0.0	0.0	0.011	0.018	0.016	0.001	0.0	0.0	0.047
E	0.0	0.0	0.001	0.022	0.031	0.022	0.003	0.0	0.0	0.078
ESE	0.0	0.0	0.002	0.028	0.032	0.014	0.0	0.0	0.0	0.075
SE	0.0	0.0	0.027	0.117	0.114	0.082	0.004	0.0	0.0	0.344
SSE	0.0	0.0	0.035	0.091	0.052	0.061	0.004	0.0	0.0	0.244
S	0.0	0.0	0.034	0.097	0.059	0.064	0.014	0.001	0.0	0.269
SSW	0.0	0.0	0.014	0.042	0.018	0.026	0.002	0.0	0.0	0.102
SW	0.0	0.0	0.003	0.010	0.005	0.007	0.002	0.001	0.0	0.028
WSW	0.0	0.0	0.004	0.036	0.049	0.065	0.028	0.001	0.0	0.183
W	0.0	0.0	0.001	0.023	0.070	0.103	0.053	0.014	0.0	0.263
WNW	0.0	0.0	0.0	0.003	0.036	0.154	0.164	0.107	0.009	0.472
NW	0.0	0.0	0.0	0.003	0.033	0.126	0.173	0.073	0.011	0.418
NNW	0.0	0.0	0.0	0.007	0.041	0.196	0.157	0.027	0.001	0.428
Sub										
total	0.0	0.0	0.122	0.517	0.701	1.363	0.753	0.253	0.022	3.732

Total hours of valid observations - 101961
Total hours of ground level release - 10832.031
Total hours of stability class D - 54573.199
Total hours of ground level stability class D - 3804.72

Meteorological facility: located 1.3 km ESE of BFN
Stability based on Delta-T measured between 10.03 and 45.30 meters
Wind direction measured at 10.42 meter level
Effluent velocity - 12.60 m/s

Table 7.3 (19 of 28)
SPLIT JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION
Split Level Releases - Ground Level Portion
Stability Class E ($0.5 < \Delta T \leq 1.5$ degrees C per 100 m)
BROWNS FERRY NUCLEAR PLANT
January 1, 1977 - December 31, 1988

WIND Dir	Calm	Wind Speed (mph)								Total
		0.6- 1.4	1.5- 3.4	3.5- 5.4	5.5- 7.4	7.5- 12.4	12.5- 18.4	18.5- 24.4	≥ 24.5	
N	0.0	0.0	0.005	0.040	0.054	0.064	0.021	0.002	0.0	0.185
NNE	0.0	0.0	0.008	0.048	0.068	0.071	0.010	0.001	0.0	0.206
NE	0.0	0.001	0.008	0.044	0.051	0.033	0.003	0.0	0.0	0.140
ENE	0.0	0.001	0.014	0.037	0.023	0.007	0.003	0.001	0.0	0.087
E	0.0	0.0	0.015	0.060	0.024	0.012	0.001	0.0	0.0	0.113
ESE	0.0	0.001	0.021	0.068	0.049	0.022	0.001	0.0	0.0	0.162
SE	0.0	0.004	0.094	0.167	0.122	0.107	0.014	0.0	0.0	0.507
SSE	0.0	0.002	0.070	0.111	0.106	0.164	0.030	0.001	0.0	0.485
S	0.0	0.003	0.068	0.100	0.112	0.281	0.077	0.003	0.0	0.643
SSW	0.0	0.001	0.027	0.033	0.020	0.050	0.005	0.0	0.0	0.135
SW	0.0	0.0	0.007	0.008	0.004	0.006	0.0	0.0	0.0	0.025
WSW	0.0	0.0	0.016	0.043	0.016	0.023	0.013	0.0	0.0	0.111
W	0.0	0.0	0.009	0.049	0.038	0.027	0.006	0.0	0.0	0.129
WNW	0.0	0.0	0.001	0.008	0.015	0.026	0.015	0.003	0.0	0.069
NW	0.0	0.0	0.001	0.015	0.021	0.046	0.025	0.005	0.0	0.112
NNW	0.0	0.0	0.004	0.035	0.059	0.092	0.024	0.004	0.001	0.219
Sub total	0.0	0.014	0.368	0.865	0.784	1.029	0.248	0.020	0.001	3.328

Total hours of valid observations - 101961
Total hours of ground level release - 10832.031
Total hours of stability class E - 32478.371
Total hours of ground level stability class E - 3393.06

Meteorological facility: located 1.3 km ESE of BFN
Stability based on ΔT between 10.03 and 45.30 meters
Wind direction measured at 10.42 meter level
Wind speed measured at 10.42 meter level
Effluent velocity = 12.60 m/s

Table 7.3 (20 of 28)

SPLINT JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION

Split Level Releases - Ground Level Portion

Stability Class F ($1.5 < \Delta T \leq 4.0$ degrees C per 100 m)

BROWNS FERRY NUCLEAR PLANT

January 1, 1977 - December 31, 1988

WIND Dir	Calm	Wind Speed (mph)								Total
		0.6- 1.4	1.5- 3.4	3.5- 5.4	5.5- 7.4	7.5- 12.4	12.5- 18.4	18.5- 24.4	≥ 24.5	
N	0.0	0.0	0.014	0.051	0.038	0.010	0.0	0.0	0.0	0.112
NNE	0.0	0.001	0.016	0.068	0.051	0.017	0.0	0.0	0.0	0.152
NE	0.0	0.002	0.012	0.030	0.020	0.003	0.0	0.0	0.0	0.066
ENE	0.0	0.004	0.018	0.031	0.006	0.001	0.0	0.0	0.0	0.061
E	0.0	0.001	0.017	0.034	0.002	0.0	0.0	0.0	0.0	0.054
ESE	0.0	0.002	0.019	0.010	0.001	0.001	0.0	0.0	0.0	0.032
SE	0.0	0.005	0.064	0.052	0.030	0.036	0.002	0.001	0.0	0.191
SSE	0.0	0.005	0.050	0.056	0.060	0.138	0.017	0.002	0.0	0.328
S	0.0	0.003	0.028	0.035	0.054	0.121	0.013	0.001	0.0	0.255
SSW	0.0	0.002	0.007	0.005	0.002	0.003	0.0	0.0	0.0	0.019
SW	0.0	0.001	0.004	0.001	0.001	0.0	0.0	0.0	0.0	0.007
WSW	0.0	0.0	0.004	0.003	0.0	0.0	0.0	0.0	0.0	0.008
W	0.0	0.0	0.003	0.006	0.001	0.001	0.0	0.0	0.0	0.010
WNW	0.0	0.0	0.002	0.002	0.001	0.001	0.0	0.0	0.0	0.006
NW	0.0	0.0	0.002	0.004	0.003	0.002	0.0	0.0	0.0	0.010
NNW	0.0	0.0	0.007	0.031	0.025	0.008	0.0	0.0	0.0	0.071
Sub total	0.0	0.027	0.265	0.418	0.296	0.340	0.032	0.004	0.0	1.383

Total hours of valid observations - 101961
Total hours of ground level release - 10832.031
Total hours of stability class F - 9482
Total hours of ground level stability class F - 1410.51

Meteorological facility: located 1.3 km ESE of BFN
Stability based on ΔT measured between 10.03 and 45.30 meters
Wind speed measured at 10.42 meter level
Effluent velocity = 12.60 m/s

Table 7.3 (21 of 28)
SPLIT JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION
Split Level Releases - Ground Level Portion
Stability Class G (Delta-T > 4.0 degrees C per 100 m)
BROWNS FERRY NUCLEAR PLANT
January 1, 1977 - December 31, 1988

WIND Dir	Calm	Wind Speed (mph)								Total
		0.6- 1.4	1.5- 3.4	3.5- 5.4	5.5- 7.4	7.5- 12.4	12.5- 18.4	18.5- 24.4	≥24.5	
N	0.0	0.0	0.020	0.034	0.007	0.0	0.0	0.0	0.0	0.062
NNE	0.0	0.001	0.022	0.071	0.028	0.002	0.0	0.0	0.0	0.123
NE	0.0	0.001	0.009	0.010	0.004	0.0	0.0	0.0	0.0	0.023
ENE	0.0	0.002	0.008	0.011	0.002	0.0	0.0	0.0	0.0	0.024
E	0.0	0.0	0.009	0.007	0.0	0.0	0.0	0.0	0.0	0.016
ESE	0.0	0.0	0.006	0.0	0.0	0.0	0.0	0.0	0.0	0.006
SE	0.0	0.004	0.027	0.012	0.013	0.007	0.0	0.0	0.0	0.062
SSE	0.0	0.003	0.053	0.065	0.044	0.041	0.0	0.0	0.0	0.206
S	0.0	0.002	0.011	0.022	0.016	0.016	0.0	0.0	0.0	0.067
SSW	0.0	0.001	0.001	0.0	0.0	0.0	0.0	0.0	0.0	0.002
SW	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.001
WSW	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.001
W	0.0	0.0	0.001	0.0	0.0	0.0	0.0	0.0	0.0	0.001
WNW	0.0	0.0	0.001	0.0	0.0	0.0	0.0	0.0	0.0	0.001
NW	0.0	0.0	0.002	0.0	0.0	0.0	0.0	0.0	0.0	0.002
NNW	0.0	0.0	0.005	0.009	0.003	0.0	0.0	0.0	0.0	0.017
Sub total	0.0	0.014	0.174	0.242	0.116	0.066	0.0	0.0	0.0	0.614

Total hours of valid observations - 101961
Total hours of ground level release - 10832.031
Total hours of stability class G - 2783.14
Total hours of ground level stability class G - 625.73

Meteorological facility: located 1.3 km ESE of BFN
Stability based on Delta-T between 10.03 and 45.30 meters
Wind speed and direction measured at the 10.42 meter level
Effluent velocity = 12.60 m/s

Table 7.3 (22 of 28)
SPLIT JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION

Split Level Releases - Elevated Portion
Stability Class A ($\Delta T \leq -1.9$ degrees C per 100 m)
BROWNS FERRY NUCLEAR PLANT
January 1, 1977 - December 31, 1988

WIND Dir	Calm	Wind Speed (mph)								Total
		0.6- 1.4	1.5- 3.4	3.5- 5.4	5.5- 7.4	7.5- 12.4	12.5- 18.4	18.5- 24.4	≥ 24.5	
N	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
NNE	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
NE	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
ENE	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
E	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
ESE	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
SE	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
SSE	0.0	0.0	0.003	0.002	0.0	0.0	0.001	0.0	0.0	0.006
S	0.0	0.0	0.002	0.0	0.0	0.0	0.0	0.0	0.0	0.002
SSW	0.0	0.0	0.002	0.001	0.002	0.0	0.0	0.0	0.0	0.005
SW	0.0	0.0	0.0	0.003	0.002	0.002	0.001	0.0	0.0	0.007
WSW	0.0	0.0	0.0	0.001	0.001	0.002	0.0	0.0	0.0	0.004
W	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
WNW	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
NW	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
NNW	0.0	0.0	0.0	0.0	0.0	0.001	0.0	0.0	0.0	0.001
Sub total	0.0	0.0	0.007	0.007	0.005	0.004	0.002	0.0	0.0	0.024

Total hours of valid observations - 101961
Total hours of elevated releases - 91128.969
Total hours of stability class A - 718.45
Total hours of elevated stability class A - 24.87

Meteorological facility: located 1.3 km ESE of BFN
Stability based on ΔT between 45.30 and 89.60 meters
Wind direction measured at 45.67 meter level
Wind speed measured at 45.67 meter level
Effluent velocity = 12.60 m/s

Table 7.3 (23 of 28)
JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION
Split Level Releases - Elevated Portion
Stability Class B ($-1.9 < \Delta T \leq -1.7$ degrees C per 100 m)
BROWNS FERRY NUCLEAR PLANT
January 1, 1977 - December 31, 1988

WIND Dir	Calm	Wind Speed (mph)								Total
		0.6- 1.4	1.5- 3.4	3.5- 5.4	5.5- 7.4	7.5- 12.4	12.5- 18.4	18.5- 24.4	≥ 24.5	
N	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
NNE	0.0	0.0	0.0	0.001	0.0	0.2	0.0	0.0	0.0	0.001
NE	0.0	0.0	0.0	0.001	0.0	0.0	0.0	0.0	0.0	0.001
ENE	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
E	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
ESE	0.0	0.0	0.0	0.001	0.002	0.004	0.001	0.0	0.0	0.008
SE	0.0	0.0	0.010	0.008	0.0	0.004	0.0	0.0	0.0	0.021
SSE	0.0	0.0	0.007	0.009	0.001	0.0	0.0	0.0	0.0	0.017
S	0.0	0.0	0.005	0.008	0.004	0.0	0.0	0.0	0.0	0.017
SSW	0.0	0.0	0.004	0.010	0.005	0.009	0.001	0.0	0.0	0.028
SW	0.0	0.0	0.0	0.022	0.007	0.007	0.001	0.0	0.0	0.036
WSW	0.0	0.0	0.0	0.002	0.006	0.009	0.001	0.0	0.0	0.018
W	0.0	0.0	0.0	0.0	0.006	0.007	0.006	0.002	0.0	0.020
WNW	0.0	0.0	0.0	0.001	0.0	0.002	0.002	0.0	0.0	0.004
NW	0.0	0.0	0.0	0.0	0.0	0.001	0.0	0.0	0.0	0.001
NNW	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Sub total	0.0	0.0	0.025	0.062	0.029	0.042	0.010	0.002	0.0	0.172

Total hours of valid observations - 101961
Total hours of elevated releases - 91128.969
Total hours of stability class B - 618.82
Total hours of elevated stability class B - 174.930

Meteorological facility: located 1.3 km ESE of BFN
Stability based on Delta-T between 45.30 and 89.60 meters
Wind direction measured at 45.67 meter level
Wind speed measured at 45.67 meter level
Effluent velocity = 12.60 m/s

Table 7.3 (24 of 28)
JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION
Split Level Releases - Elevated Portion
Stability Class C ($-1.7 < \Delta T \leq -1.5$ degrees C per 100 m)
BROWNS FERRY NUCLEAR PLANT
January 1, 1977 - December 31, 1988

WIND Dir	Calm	Wind Speed (mph)								Total
		0.6- 1.4	1.5- 3.4	3.5- 5.4	5.5- 7.4	7.5- 12.4	12.5- 18.4	18.5- 24.4	≥ 24.5	
N	0.0	0.0	0.0	0.0	0.0	0.001	0.0	0.0	0.0	0.001
NNE	0.0	0.0	0.0	0.0	0.003	0.003	0.001	0.001	0.0	0.007
NE	0.0	0.0	0.0	0.0	0.0	0.001	0.0	0.0	0.0	0.001
ENE	0.0	0.0	0.0	0.0	0.0	0.003	0.002	0.0	0.0	0.005
E	0.0	0.0	0.0	0.002	0.004	0.003	0.0	0.0	0.0	0.008
ESE	0.0	0.0	0.0	0.007	0.008	0.012	0.002	0.0	0.0	0.029
SE	0.0	0.0	0.030	0.063	0.010	0.011	0.001	0.0	0.0	0.116
SSE	0.0	0.0	0.020	0.054	0.007	0.004	0.0	0.0	0.0	0.084
S	0.0	0.0	0.027	0.025	0.010	0.001	0.0	0.0	0.0	0.063
SSW	0.0	0.0	0.010	0.030	0.021	0.009	0.001	0.0	0.0	0.071
SW	0.0	0.0	0.011	0.063	0.040	0.022	0.003	0.0	0.0	0.139
WSW	0.0	0.0	0.002	0.025	0.028	0.046	0.006	0.0	0.0	0.108
W	0.0	0.0	0.001	0.004	0.031	0.057	0.015	0.008	0.0	0.117
WNW	0.0	0.0	0.0	0.003	0.003	0.030	0.025	0.003	0.0	0.064
NW	0.0	0.0	0.0	0.002	0.002	0.002	0.010	0.0	0.0	0.015
NNW	0.0	0.0	0.0	0.0	0.0	0.001	0.002	0.0	0.0	0.002
Sub total	0.0	0.0	0.101	0.278	0.166	0.206	0.066	0.013	0.0	0.830

Total hours of valid observations - 101961
Total hours of elevated releases - 91128.969
Total hours of stability class C - 1307.02
Total hours of elevated stability class C - 846.48

Meteorological facility: located 1.3 km ESE of BFN
Stability based on ΔT between 45.30 and 89.60 meters
Wind direction measured at 45.67 meter level
Wind speed and direction measured at 45.67 meter level
Effluent velocity = 12.60 m/s

Table 7.3 (25 of 28)
JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION
Split Level Releases - Elevated Portion
Stability Class D ($-1.5 < \Delta T \leq -0.5$ degrees C per 100 m)
BROWNS FERRY NUCLEAR PLANT
January 1, 1977 - December 31, 1988

WIND Dir	Calm	Wind Speed (mph)								Total
		0.6- 1.4	1.5- 3.4	3.5- 5.4	5.5- 7.4	7.5- 12.4	12.5- 18.4	18.5- 24.4	≥ 24.5	
N	0.0	0.005	0.120	0.359	0.577	1.660	1.059	0.135	0.003	3.919
NNE	0.0	0.017	0.129	0.416	0.719	1.926	0.915	0.070	0.001	4.193
NE	0.0	0.016	0.124	0.358	0.469	0.904	0.153	0.008	0.0	2.032
ENE	0.0	0.012	0.122	0.245	0.244	0.260	0.034	0.003	0.0	0.920
E	0.0	0.018	0.124	0.219	0.245	0.298	0.088	0.008	0.0	0.999
ESE	0.001	0.010	0.224	0.499	0.561	0.822	0.138	0.005	0.0	2.260
SE	0.002	0.025	0.753	1.509	0.945	1.586	0.834	0.143	0.006	5.803
SSE	0.002	0.036	0.520	0.867	0.705	1.411	0.981	0.277	0.013	4.811
S	0.001	0.012	0.417	0.769	0.603	1.197	1.036	0.320	0.022	4.376
SSW	0.001	0.017	0.240	0.524	0.409	0.792	0.479	0.119	0.006	2.586
SW	0.001	0.016	0.322	0.749	0.425	0.620	0.297	0.053	0.002	2.484
WSW	0.001	0.010	0.178	0.604	0.505	0.575	0.279	0.053	0.001	2.204
W	0.0	0.008	0.111	0.482	0.701	1.163	0.432	0.086	0.004	2.985
WNW	0.0	0.008	0.107	0.330	0.481	1.140	0.823	0.246	0.009	3.145
NW	0.0	0.007	0.110	0.382	0.535	1.281	1.115	0.289	0.007	3.726
NNW	0.0	0.013	0.117	0.277	0.400	1.264	1.092	0.181	0.005	3.348
Sub total	0.012	0.227	3.715	8.588	8.524	16.899	9.754	1.994	0.080	49.792

Total hours of valid observations - 101961
Total hours of elevated release - 91128.969
Total hours of stability class D - 54573.199
Total hours of elevated stability class D - 50768.48

Meteorological facility: located 1.3 km ESE of BFN
Stability based on Delta-T between 45.30 and 89.60 meters
Wind speed and direction measured at the 45.67 meter level
Effluent velocity = 12.60 m/s

Table 7.3 (26 of 28)
JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION
Split Level Releases - Elevated Portion
Stability Class E (-0.5 < Delta-T ≤ 1.5 degrees C per 100 m)
BROWNS FERRY NUCLEAR PLANT
January 1, 1977 - December 31, 1988

WIND Dir	Calm	Wind Speed (mph)								Total
		0.6- 1.4	1.5- 3.4	3.5- 5.4	5.5- 7.4	7.5- 12.4	12.5- 18.4	18.5- 24.4	≥24.5	
N	0.001	0.019	0.146	0.239	0.369	0.794	0.160	0.001	0.0	1.729
NNE	0.001	0.019	0.159	0.273	0.374	0.935	0.228	0.003	0.0	1.992
NE	0.001	0.021	0.138	0.271	0.320	0.713	0.133	0.002	0.0	1.598
ENE	0.002	0.018	0.179	0.260	0.298	0.407	0.057	0.0	0.0	1.221
E	0.001	0.007	0.111	0.283	0.338	0.558	0.046	0.003	0.0	1.347
ESE	0.003	0.019	0.299	0.587	0.719	0.866	0.069	0.004	0.0	2.566
SE	0.005	0.034	0.558	1.105	1.027	1.327	0.446	0.064	0.004	4.570
SSE	0.003	0.021	0.293	0.612	0.522	0.938	0.659	0.156	0.010	3.214
S	0.002	0.018	0.207	0.453	0.335	0.779	0.437	0.075	0.003	2.309
SSW	0.001	0.014	0.167	0.304	0.277	0.519	0.212	0.020	0.001	1.514
SW	0.002	0.013	0.213	0.331	0.321	0.342	0.102	0.014	0.001	1.337
WSW	0.001	0.015	0.162	0.290	0.256	0.291	0.040	0.005	0.0	1.061
W	0.001	0.007	0.113	0.280	0.316	0.347	0.051	0.001	0.0	1.114
WNW	0.001	0.015	0.082	0.183	0.205	0.243	0.038	0.003	0.0	0.771
NW	0.001	0.012	0.107	0.179	0.183	0.294	0.111	0.003	0.0	0.890
NNW	0.001	0.014	0.109	0.192	0.256	0.563	0.154	0.004	0.0	1.293
Sub total	0.026	0.262	3.043	5.843	6.115	9.916	2.942	0.359	0.018	28.526

Total hours of valid observations - 101961
Total hours of elevated release - 91128.969
Total hours of stability class E - 32478.371
Total hours of elevated stability class E - 29085.311

Meteorological facility: located 1.3 km ESE of BFN
Stability based on Delta-T between 45.30 and 89.60 meters
Wind speed and direction measured at the 45.67 meter level
Effluent velocity = 12.60 m/s

Table 7.3 (27 of 28)

JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION
Split Level Releases - Elevated Portion
Stability Class F ($1.5 < \Delta T \leq 4.0$ degrees C per 100 m)
BROWNS FERRY NUCLEAR PLANT
January 1, 1977 - December 31, 1988

WIND Dir	Calm	Wind Speed (mph)								Total
		0.6- 1.4	1.5- 3.4	3.5- 5.4	5.5- 7.4	7.5- 12.4	12.5- 18.4	18.5- 24.4	≥ 24.5	
N	0.001	0.002	0.035	0.082	0.066	0.306	0.038	0.0	0.0	0.530
NNE	0.001	0.002	0.038	0.088	0.097	0.438	0.144	0.0	0.0	0.808
NE	0.001	0.005	0.041	0.115	0.135	0.349	0.102	0.0	0.0	0.748
ENE	0.001	0.009	0.037	0.103	0.149	0.255	0.057	0.0	0.0	0.612
E	0.001	0.003	0.031	0.084	0.133	0.269	0.023	0.001	0.0	0.545
ESE	0.003	0.008	0.115	0.243	0.294	0.183	0.002	0.0	0.0	0.848
SE	0.004	0.009	0.162	0.410	0.274	0.177	0.005	0.001	0.0	1.041
SSE	0.002	0.011	0.088	0.147	0.127	0.161	0.022	0.001	0.0	0.559
S	0.002	0.008	0.079	0.120	0.122	0.171	0.023	0.0	0.0	0.525
SSW	0.001	0.013	0.057	0.119	0.121	0.140	0.010	0.0	0.0	0.461
SW	0.001	0.008	0.061	0.101	0.093	0.063	0.0	0.0	0.0	0.327
WSW	0.001	0.004	0.043	0.072	0.080	0.047	0.001	0.0	0.0	0.248
W	0.001	0.007	0.037	0.063	0.063	0.047	0.001	0.0	0.0	0.219
WNW	0.001	0.005	0.026	0.047	0.029	0.024	0.0	0.0	0.0	0.133
NW	0.001	0.005	0.033	0.047	0.029	0.016	0.002	0.0	0.0	0.132
NNW	0.001	0.006	0.025	0.032	0.043	0.068	0.005	0.0	0.0	0.179
Sub total	0.022	0.103	0.910	1.873	1.855	2.717	0.434	0.003	0.0	7.916

Total hours of valid observations - 101961
Total hours of elevated release - 91128.969
Total hours of stability class F - 9482
Total hours of elevated stability class F - 8071.49

Meteorological facility: located 1.3 km ESE of BFN
Stability based on ΔT between 45.30 and 89.60 meters
Wind speed and direction measured at the 45.67 meter level
Effluent velocity = 12.60 m/s

Table 7.3 (28 of 28)
JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION
Split Level Releases - Elevated Portion
Stability Class G (Delta-T > 4.0 degrees C per 100 m)
BROWNS FERRY NUCLEAR PLANT
January 1, 1977 - December 31, 1988

WIND Dir	Calm	Wind Speed (mph)								Total
		0.6- 1.4	1.5- 3.4	3.5- 5.4	5.5- 7.4	7.5- 12.4	12.5- 18.4	18.5- 24.4	≥24.5	
N	0.0	0.0	0.007	0.023	0.022	0.064	0.002	0.0	0.0	0.118
NNE	0.0	0.001	0.013	0.025	0.045	0.130	0.051	0.0	0.0	0.264
NE	0.0	0.002	0.018	0.021	0.051	0.122	0.021	0.0	0.0	0.234
ENE	0.0	0.003	0.005	0.017	0.027	0.071	0.010	0.0	0.0	0.133
E	0.0	0.001	0.003	0.019	0.013	0.043	0.002	0.0	0.0	0.082
ESE	0.001	0.006	0.048	0.103	0.054	0.016	0.0	0.0	0.0	0.229
SE	0.003	0.005	0.107	0.219	0.107	0.035	0.0	0.0	0.0	0.475
SSE	0.001	0.005	0.045	0.064	0.038	0.025	0.0	0.0	0.0	0.177
S	0.001	0.002	0.026	0.040	0.035	0.011	0.0	0.0	0.0	0.116
SSW	0.0	0.003	0.012	0.014	0.030	0.023	0.001	0.0	0.0	0.083
SW	0.0	0.006	0.009	0.008	0.028	0.012	0.0	0.0	0.0	0.063
WSW	0.0	0.001	0.013	0.008	0.0	0.001	0.0	0.0	0.0	0.023
W	0.0	0.0	0.014	0.011	0.005	0.004	0.0	0.0	0.0	0.033
WNW	0.0	0.002	0.009	0.004	0.005	0.002	0.0	0.0	0.0	0.022
NW	0.0	0.006	0.005	0.010	0.008	0.003	0.0	0.0	0.0	0.031
NNW	0.0	0.0	0.012	0.010	0.005	0.007	0.0	0.0	0.0	0.034
Sub total	0.006	0.042	0.344	0.592	0.471	0.568	0.087	0.0	0.0	2.116

Total hours of valid observations - 101961
Total hours of elevated release - 91128.969
Total hours of stability class G - 2783.14
Total hours of elevated stability class G - 2157.41

Meteorological facility: located 1.3 km ESE of BFN
Stability based on Delta-T between 45.30 and 89.60 meters
Wind speed and direction measured at the 45.67 meter level
Effluent velocity = 12.60 m/s

Table 7.4
NOBLE GAS DOSE FACTORS

	Submersion dose		Air dose	
	mrem/y per $\mu\text{Ci}/\text{m}^3$ DFB _i	mrem/y per $\mu\text{Ci}/\text{m}^3$ DFS _i	mrads/y per $\mu\text{Ci}/\text{m}^3$ DF _{γi}	mrads/y per $\mu\text{Ci}/\text{m}^3$ DF _{βi}
Ar-41	8.84E+03	2.69E+03	9.30E+03	3.28E+03
Kr-83m	7.56E-02	---	1.93E+01	2.88E+02
Kr-85m	1.17E+03	1.46E+03	1.23E+03	1.97E+03
Kr-85	1.61E+01	1.34E+03	1.72E+01	1.95E+03
Kr-87	5.92E+03	9.73E+03	6.17E+03	1.03E+04
Kr-88	1.47E+04	2.37E+03	1.52E+04	2.93E+03
Kr-89	1.66E+04	1.01E+04	1.73E+04	1.06E+04
Kr-90	1.56E+04	7.29E+03	1.63E+04	7.83E+03
Xe-131m	9.15E+01	4.76E+02	1.56E+02	1.11E+03
Xe-133m	2.51E+02	9.94E+02	3.27E+02	1.48E+03
Xe-133	2.94E+02	3.06E+02	3.53E+02	1.05E+03
Xe-135m	3.12E+03	7.11E+02	3.36E+03	7.39E+02
Xe-135	1.81E+03	1.86E+03	1.92E+03	2.46E+03
Xe-137	1.42E+03	1.22E+04	1.51E+03	1.27E+04
Xe-138	8.83E+03	4.13E+03	9.21E+03	4.75E+03

Reference:
Regulatory Guide 1.109, Table B-1.

Finite Cloud Dose Factors
mrads/y per $\mu\text{Ci}/\text{s}$ (B_i) or
mrem/y per $\mu\text{Ci}/\text{s}$ (V_i)

	Highest Site Boundary Ground Vent Releases NNW Sector at 1650 m		Highest Site Boundary Split Level Vent Releases N Sector at 1525 m		Highest Offsite Location Elevated Vent Releases NW Sector at 8500 m	
	B _i	V _i	B _i	V _i	B _i	V _i
Ar-41	1.30E-03	1.50E-03	1.63E-03	1.87E-03	2.71E-04	3.12E-04
Kr-83m	1.08E-05	1.23E-05	1.31E-05	1.48E-05	2.25E-06	2.55E-06
Kr-85m	7.29E-05	8.57E-05	9.38E-05	1.10E-04	1.52E-05	1.78E-05
Kr-85	2.68E-04	3.11E-04	3.34E-04	3.88E-04	5.56E-05	6.46E-05
Kr-87	8.46E-04	9.72E-04	1.11E-03	1.28E-03	1.76E-04	2.02E-04
Kr-88	1.84E-03	2.09E-03	2.42E-03	2.75E-03	3.82E-04	4.34E-04
Kr-89	1.89E-03	2.17E-03	2.49E-03	2.86E-03	3.94E-04	4.51E-04
Kr-90	1.17E-03	1.36E-03	1.54E-03	1.78E-03	2.44E-04	2.83E-04
Xe-131m	5.87E-05	6.67E-05	7.10E-05	8.08E-05	1.22E-05	1.39E-05
Xe-133m	9.91E-05	1.14E-04	1.22E-04	1.41E-04	2.06E-05	2.37E-05
Xe-133	1.34E-04	1.52E-04	1.61E-04	1.83E-04	2.78E-05	3.15E-05
Xe-135m	7.20E-04	8.43E-04	9.31E-04	1.09E-03	1.50E-04	1.75E-04
Xe-135	4.73E-04	5.54E-04	6.01E-04	7.05E-04	9.83E-05	1.15E-04
Xe-137	6.74E-04	7.68E-04	8.87E-04	1.01E-03	1.40E-04	1.60E-04
Xe-138	1.24E-03	1.43E-03	1.63E-03	1.87E-03	2.59E-04	2.97E-04

Reference: TVA generated values.

Table 7.5
SECTOR ELEMENTS CONSIDERED FOR POPULATION DOSES

Range of Sector Element	Midpoint of Sector Element
Site boundary - 1 mile	0.8 mile
1 - 2 miles	1.5 miles
2 - 3 miles	2.5 miles
3 - 4 miles	3.5 miles
4 - 5 miles	4.5 miles
5 - 10 miles	7.5 miles
10 - 20 miles	15 miles
20 - 30 miles	25 miles
30 - 40 miles	35 miles
40 - 50 miles	45 miles

Table 7.6
BFN 50-MILE POPULATION WITHIN EACH SECTOR ELEMENT

	Distance Range									
	0-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
N	38	0	0	82	133	1338	2887	3172	11844	4190
NNE	0	12	23	155	54	1516	2756	4551	3827	4236
NE	0	3	23	44	123	4560	13356	7431	7554	13972
ENE	0	38	86	102	44	1750	9232	30963	18076	7866
E	0	0	23	7	32	1586	15764	48934	90006	6583
ESE	0	0	12	0	0	123	2466	5115	26482	11164
SE	0	0	0	0	0	8435	22086	7344	8313	21440
SSE	0	0	0	0	0	2483	30555	13272	21617	20244
S	0	0	10	12	46	1525	4758	2533	6218	5550
SSW	0	0	33	40	188	1345	6369	1160	2570	4703
SW	0	0	0	15	111	847	5719	2470	3460	13138
WSW	0	0	10	19	73	244	3461	2895	13472	4772
W	0	84	15	8	17	79	3761	10877	29784	5845
WNW	0	0	4	8	27	36	1970	7936	49335	5307
NW	0	0	76	9	60	826	4145	7270	6059	4242
NNW	0	189	183	63	79	1381	2332	2958	15381	10031

Table 7.7 (1 of 8)
INHALATION DOSE FACTORS
(mrem/pCi inhaled)

Nuclide	ADULT						
	bone	liver	t body	thyroid	kidney	lung	gi-lli
H-3	1.58E-07	1.58E-07	1.58E-07	1.58E-07	1.58E-07	1.58E-07	1.58E-07
C-14	2.27E-06	4.26E-07	4.26E-07	4.26E-07	4.26E-07	4.26E-07	4.26E-07
Na-24	1.28E-06	1.28E-06	1.28E-06	1.28E-06	1.28E-06	1.28E-06	1.28E-06
P-32	1.65E-04	9.64E-06	6.26E-06	0.00E+00	0.00E+00	0.00E+00	1.08E-05
Cr-51	0.00E+00	0.00E+00	1.25E-08	7.44E-09	2.85E-09	1.80E-06	4.15E-07
Mn-54	0.00E+00	4.95E-06	7.87E-07	0.00E+00	1.23E-06	1.75E-04	9.67E-06
Mn-56	0.00E+00	1.55E-10	2.29E-11	0.00E+00	1.63E-10	1.18E-06	2.53E-06
Fe-55	3.07E-06	2.12E-06	4.93E-07	0.00E+00	0.00E+00	9.01E-06	7.54E-07
Fe-59	1.47E-06	3.47E-06	1.32E-06	0.00E+00	0.00E+00	1.27E-04	2.35E-05
Co-57	0.00E+00	8.65E-08	8.39E-08	0.00E+00	0.00E+00	4.62E-05	3.93E-06
Co-58	0.00E+00	1.98E-07	2.59E-07	0.00E+00	0.00E+00	1.16E-04	1.33E-05
Co-60	0.00E+00	1.44E-06	1.85E-06	0.00E+00	0.00E+00	7.46E-04	3.56E-05
Ni-63	5.40E-05	3.93E-06	1.81E-06	0.00E+00	0.00E+00	2.23E-05	1.67E-06
Ni-65	1.92E-10	2.62E-11	1.14E-11	0.00E+00	0.00E+00	7.00E-07	1.54E-06
Cu-64	0.00E+00	1.83E-10	7.69E-11	0.00E+00	5.78E-10	8.48E-07	6.12E-06
Zn-65	4.05E-06	1.29E-05	5.82E-06	0.00E+00	8.62E-06	1.08E-04	6.68E-06
Zn-69	4.23E-12	8.14E-12	5.65E-13	0.00E+00	5.27E-12	1.15E-07	2.04E-09
Zn-69m	1.02E-09	2.45E-09	2.24E-10	0.00E+00	1.48E-09	2.38E-06	1.71E-05
Br-82	0.00E+00	0.00E+00	1.69E-06	0.00E+00	0.00E+00	0.00E+00	1.30E-06
Br-83	0.00E+00	0.00E+00	3.01E-08	0.00E+00	0.00E+00	0.00E+00	2.90E-08
Br-84	0.00E+00	0.00E+00	3.91E-08	0.00E+00	0.00E+00	0.00E+00	2.05E-13
Br-85	0.00E+00	0.00E+00	1.60E-09	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Rb-86	0.00E+00	1.69E-05	7.37E-06	0.00E+00	0.00E+00	0.00E+00	2.08E-06
Rb-88	0.00E+00	4.84E-08	2.41E-08	0.00E+00	0.00E+00	0.00E+00	4.18E-19
Rb-89	0.00E+00	3.20E-08	2.12E-08	0.00E+00	0.00E+00	0.00E+00	1.16E-21
Sr-89	3.80E-05	0.00E+00	1.09E-06	0.00E+00	0.00E+00	1.75E-04	4.37E-05
Sr-90	1.24E-02	0.00E+00	7.62E-04	0.00E+00	0.00E+00	1.20E-03	9.02E-05
Sr-91	7.74E-09	0.00E+00	3.13E-10	0.00E+00	0.00E+00	4.56E-06	2.39E-05
Sr-92	8.43E-10	0.00E+00	3.64E-11	0.00E+00	0.00E+00	2.06E-06	5.38E-06
Y-90	2.61E-07	0.00E+00	7.01E-09	0.00E+00	0.00E+00	2.12E-05	6.32E-05
Y-91m	3.26E-11	0.00E+00	1.27E-12	0.00E+00	0.00E+00	2.40E-07	1.66E-10
Y-91	5.78E-05	0.00E+00	1.55E-06	0.00E+00	0.00E+00	2.13E-04	4.81E-05
Y-92	1.29E-09	0.00E+00	3.77E-11	0.00E+00	0.00E+00	1.96E-06	9.19E-06
Y-93	1.18E-08	0.00E+00	3.26E-10	0.00E+00	0.00E+00	6.06E-06	5.27E-05
Zr-95	1.34E-05	4.30E-06	2.91E-06	0.00E+00	6.77E-06	2.21E-04	1.88E-05
Zr-97	1.21E-08	2.45E-09	1.13E-09	0.00E+00	3.71E-09	9.84E-06	6.54E-05
Nb-95	1.76E-06	9.77E-07	5.26E-07	0.00E+00	9.67E-07	6.31E-05	1.30E-05
Nb-97	2.78E-11	7.03E-12	2.56E-12	0.00E+00	8.18E-12	3.00E-07	3.02E-08
Mo-99	0.00E+00	1.51E-08	2.87E-09	0.00E+00	3.64E-08	1.14E-05	3.10E-05
Tc-99m	1.29E-13	3.64E-13	4.63E-12	0.00E+00	5.52E-12	9.55E-08	5.20E-07
Tc-101	5.22E-15	7.52E-15	7.38E-14	0.00E+00	1.35E-13	4.99E-08	1.36E-21
Ru-103	1.91E-07	0.00E+00	8.23E-08	0.00E+00	7.29E-07	6.31E-05	1.38E-05
Ru-105	9.88E-11	0.00E+00	3.89E-11	0.00E+00	1.27E-10	1.37E-06	6.02E-06
Ru-106	8.64E-06	0.00E+00	1.09E-06	0.00E+00	1.67E-05	1.17E-03	1.14E-04
Ag-110m	1.35E-06	1.25E-06	7.43E-07	0.00E+00	2.46E-06	5.79E-04	3.78E-05

Table 7.7 (2 of 8)
INHALATION DOSE FACTORS
(mrem/pCi inhaled)

Nuclide	ADULT						
	bone	liver	t body	thyroid	kidney	lung	gi-lli
Sb-124	3.90E-06	7.36E-08	1.55E-06	9.44E-09	0.00E+00	3.10E-04	5.08E-05
Sb-125	6.67E-06	7.44E-08	1.58E-06	6.75E-09	0.00E+00	2.18E-04	1.26E-05
Te-125m	4.27E-07	1.98E-07	5.84E-08	1.31E-07	1.55E-06	3.92E-05	8.83E-06
Te-127m	1.58E-06	7.21E-07	1.96E-07	4.11E-07	5.72E-06	1.20E-04	1.87E-05
Te-127	1.75E-10	8.03E-11	3.87E-11	1.32E-10	6.37E-10	8.14E-07	7.17E-06
Te-129m	1.22E-06	5.84E-07	1.98E-07	4.30E-07	4.57E-06	1.45E-04	4.79E-05
Te-129	6.22E-12	2.99E-12	1.55E-12	4.87E-12	2.34E-11	2.42E-07	1.96E-08
Te-131m	8.74E-09	5.45E-09	3.63E-09	6.88E-09	3.86E-08	1.82E-05	6.95E-05
Te-131	1.39E-12	7.44E-13	4.49E-13	1.17E-12	5.46E-12	1.74E-07	2.30E-09
Te-132	3.25E-08	2.69E-08	2.02E-08	2.37E-08	1.82E-07	3.60E-05	6.37E-05
I-130	5.72E-07	1.68E-06	6.60E-07	1.42E-04	2.61E-06	0.00E+00	9.61E-07
I-131	3.15E-06	4.47E-06	2.56E-06	1.49E-03	7.66E-06	0.00E+00	7.85E-07
I-132	1.45E-07	4.07E-07	1.45E-07	1.43E-05	6.48E-07	0.00E+00	5.08E-08
I-133	1.08E-06	1.85E-06	5.65E-07	2.69E-04	3.23E-06	0.00E+00	1.11E-06
I-134	8.05E-08	2.16E-07	7.69E-08	3.73E-06	3.44E-07	0.00E+00	1.26E-10
I-135	3.35E-07	8.73E-07	3.21E-07	5.60E-05	1.39E-06	0.00E+00	6.56E-07
Cs-134	4.66E-05	1.06E-04	9.10E-05	0.00E+00	3.59E-05	1.22E-05	1.30E-06
Cs-136	4.88E-06	1.83E-05	1.38E-05	0.00E+00	1.07E-05	1.50E-06	1.46E-06
Cs-137	5.98E-05	7.76E-05	5.35E-05	0.00E+00	2.78E-05	9.40E-06	1.05E-06
Cs-138	4.14E-08	7.76E-08	4.05E-08	0.00E+00	6.00E-08	6.07E-09	2.33E-13
Ba-139	1.17E-10	8.32E-14	3.42E-12	0.00E+00	7.78E-14	4.70E-07	1.12E-07
Ba-140	4.88E-06	6.13E-09	3.21E-07	0.00E+00	2.09E-09	1.59E-04	2.73E-05
Ba-141	1.25E-11	9.41E-15	4.20E-13	0.00E+00	8.75E-15	2.42E-07	1.45E-17
Ba-142	3.29E-12	3.38E-15	2.07E-13	0.00E+00	2.86E-15	1.49E-07	1.96E-26
La-140	4.30E-08	2.17E-08	5.73E-09	0.00E+00	0.00E+00	1.70E-05	5.73E-05
La-142	8.54E-11	3.88E-11	9.65E-12	0.00E+00	0.00E+00	7.91E-07	2.64E-07
Ce-141	2.49E-06	1.69E-06	1.91E-07	0.00E+00	7.83E-07	4.52E-05	1.50E-05
Ce-143	2.33E-08	1.72E-08	1.91E-09	0.00E+00	7.60E-09	9.97E-06	2.83E-05
Ce-144	4.29E-04	1.79E-04	2.30E-05	0.00E+00	1.06E-04	9.72E-04	1.02E-04
Pr-143	1.17E-06	4.69E-07	5.80E-08	0.00E+00	2.70E-07	3.51E-05	2.50E-05
Pr-144	3.76E-12	1.56E-12	1.91E-13	0.00E+00	8.81E-13	1.27E-07	2.69E-18
Nd-147	6.59E-07	7.62E-07	4.56E-08	0.00E+00	4.45E-07	2.76E-05	2.16E-05
W-187	1.06E-09	8.85E-10	3.10E-10	0.00E+00	0.00E+00	3.63E-06	1.94E-05
Np-239	2.87E-08	2.82E-09	1.55E-09	0.00E+00	8.75E-09	4.70E-06	1.49E-05

Reference:

Dose Factors for Co-57, Zn-69m, Br-82, Nb-97, Sb-124 and Sb-125 are from NUREG-0172 Age Specific Radiation Dose Commitment Factors for a One Year Chronic Intake, November 1977, Table 8.

All others:

Regulatory Guide 1.109, Table E-7.

NOTE: The tritium dose factor for bone is assumed to be equal to the total body dose factor.

Table 7.7 (3 of 8)
INHALATION DOSE FACTORS
(mrem/pCi inhaled)

Nuclide	TEEN						
	bone	liver	t body	thyroid	kidney	lung	gi-lli
H-3	1.59E-07	1.59E-07	1.59E-07	1.59E-07	1.59E-07	1.59E-07	1.59E-07
C-14	3.25E-06	6.09E-07	6.09E-07	6.09E-07	6.09E-07	6.09E-07	6.09E-07
Na-24	1.72E-06	1.72E-06	1.72E-06	1.72E-06	1.72E-06	1.72E-06	1.72E-06
P-32	2.36E-04	1.37E-05	8.95E-06	0.00E+00	0.00E+00	0.00E+00	1.16E-05
Cr-51	0.00E+00	0.00E+00	1.69E-08	9.37E-09	3.84E-09	2.62E-06	3.75E-07
Mn-54	0.00E+00	6.39E-06	1.05E-06	0.00E+00	1.59E-06	2.48E-04	8.35E-06
Mn-56	0.00E+00	2.12E-10	3.15E-11	0.00E+00	2.24E-10	1.90E-06	7.18E-06
Fe-55	4.18E-06	2.98E-06	6.93E-07	0.00E+00	0.00E+00	1.55E-05	7.99E-07
Fe-59	1.99E-06	4.62E-06	1.79E-06	0.00E+00	0.00E+00	1.91E-04	2.23E-05
Co-57	0.00E+00	1.18E-07	1.15E-07	0.00E+00	0.00E+00	7.33E-05	3.93E-06
Co-58	0.00E+00	2.59E-07	3.47E-07	0.00E+00	0.00E+00	1.68E-04	1.19E-05
Co-60	0.00E+00	1.89E-06	2.48E-06	0.00E+00	0.00E+00	1.09E-03	3.24E-05
Ni-63	7.25E-05	5.43E-06	2.47E-06	0.00E+00	0.00E+00	3.84E-05	1.77E-06
Ni-65	2.73E-10	3.66E-11	1.59E-11	0.00E+00	0.00E+00	1.17E-06	4.59E-06
Cu-64	0.00E+00	2.54E-10	1.06E-10	0.00E+00	8.01E-10	1.39E-06	7.68E-06
Zn-65	4.82E-06	1.67E-05	7.80E-06	0.00E+00	1.08E-05	1.55E-04	5.83E-06
Zn-69	6.04E-12	1.15E-11	8.07E-13	0.00E+00	7.53E-12	1.98E-07	3.56E-08
Zn-69m	1.44E-09	3.39E-09	3.11E-10	0.00E+00	2.06E-09	3.92E-06	2.14E-05
Br-82	0.00E+00	0.00E+00	2.28E-06	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Br-83	0.00E+00	0.00E+00	4.30E-08	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Br-84	0.00E+00	0.00E+00	5.41E-08	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Br-85	0.00E+00	0.00E+00	2.29E-09	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Rb-86	0.00E+00	2.38E-05	1.05E-05	0.00E+00	0.00E+00	0.00E+00	2.21E-06
Rb-88	0.00E+00	6.82E-08	3.40E-08	0.00E+00	0.00E+00	0.00E+00	3.65E-15
Rb-89	0.00E+00	4.40E-08	2.91E-08	0.00E+00	0.00E+00	0.00E+00	4.22E-17
Sr-89	5.43E-05	0.00E+00	1.56E-06	0.00E+00	0.00E+00	3.02E-04	4.64E-05
Sr-90	1.35E-02	0.00E+00	8.35E-04	0.00E+00	0.00E+00	2.06E-03	9.56E-05
Sr-91	1.10E-08	0.00E+00	4.39E-10	0.00E+00	0.00E+00	7.59E-06	3.24E-05
Sr-92	1.19E-09	0.00E+00	5.08E-11	0.00E+00	0.00E+00	3.43E-06	1.49E-05
Y-90	3.73E-07	0.00E+00	1.00E-08	0.00E+00	0.00E+00	3.66E-05	6.99E-05
Y-91m	4.63E-11	0.00E+00	1.77E-12	0.00E+00	0.00E+00	4.00E-07	3.77E-09
Y-91	8.26E-05	0.00E+00	2.21E-06	0.00E+00	0.00E+00	3.67E-04	5.11E-05
Y-92	1.84E-09	0.00E+00	5.36E-11	0.00E+00	0.00E+00	3.35E-06	2.06E-05
Y-93	1.69E-08	0.00E+00	4.65E-10	0.00E+00	0.00E+00	1.04E-05	7.24E-05
Zr-95	1.82E-05	5.73E-06	3.94E-06	0.00E+00	8.42E-06	3.36E-04	1.86E-05
Zr-97	1.72E-08	3.40E-09	1.57E-09	0.00E+00	5.15E-09	1.62E-05	7.88E-05
Nb-95	2.32E-06	1.29E-06	7.08E-07	0.00E+00	1.25E-06	9.39E-05	1.21E-05
Nb-97	3.92E-11	9.72E-12	3.55E-12	0.00E+00	1.14E-11	4.91E-07	2.71E-07
Mo-99	0.00E+00	2.11E-08	4.03E-09	0.00E+00	5.14E-08	1.92E-05	3.36E-05
Tc-99m	1.73E-13	4.83E-13	6.24E-12	0.00E+00	7.20E-12	1.44E-07	7.66E-07
Tc-101	7.40E-15	1.05E-14	1.03E-13	0.00E+00	1.90E-13	8.34E-08	1.09E-16
Ru-103	2.63E-07	0.00E+00	1.12E-07	0.00E+00	9.29E-07	9.79E-05	1.36E-05
Ru-105	1.40E-10	0.00E+00	5.42E-11	0.00E+00	1.76E-10	2.27E-06	1.13E-05
Ru-106	1.23E-05	0.00E+00	1.55E-06	0.00E+00	2.38E-05	2.01E-03	1.20E-04
Ag-110m	1.73E-06	1.64E-06	9.99E-07	0.00E+00	3.13E-06	8.44E-04	3.41E-05

Table 7.7 (4 of 8)
INHALATION DOSE FACTORS
(mrem/pCi inhaled)

Nuclide	TEEN						
	bone	liver	t body	thyroid	kidney	lung	gi-lli
Sb-124	5.38E-06	9.92E-08	2.10E-06	1.22E-08	0.00E+00	4.81E-04	4.98E-05
Sb-125	9.23E-06	1.01E-07	2.15E-06	8.80E-09	0.00E+00	3.42E-04	1.24E-05
Te-125m	6.10E-07	2.80E-07	8.34E-08	1.75E-07	0.00E+00	6.70E-05	9.38E-06
Te-127m	2.25E-06	1.02E-06	2.73E-07	5.48E-07	8.17E-06	2.07E-04	1.99E-05
Te-127	2.51E-10	1.14E-10	5.52E-11	1.77E-10	9.10E-10	1.40E-06	1.01E-05
Te-129m	1.74E-06	8.23E-07	2.81E-07	5.72E-07	6.49E-06	2.47E-04	5.06E-05
Te-129	8.87E-12	4.22E-12	2.20E-12	6.48E-12	3.32E-11	4.12E-07	2.02E-07
Te-131m	1.23E-08	7.51E-09	5.03E-09	9.06E-09	5.49E-08	2.97E-05	7.76E-05
Te-131	1.97E-12	1.04E-12	6.30E-13	1.55E-12	7.72E-12	2.92E-07	1.89E-09
Te-132	4.50E-08	3.63E-08	2.74E-08	3.07E-08	2.44E-07	5.61E-05	5.79E-05
I-130	7.80E-07	2.24E-06	8.96E-07	1.86E-04	3.44E-06	0.00E+00	1.14E-06
I-131	4.43E-06	6.14E-06	3.30E-06	1.83E-03	1.05E-05	0.00E+00	8.11E-07
I-132	1.99E-07	5.47E-07	1.97E-07	1.89E-05	8.65E-07	0.00E+00	1.59E-07
I-133	1.52E-06	2.56E-06	7.78E-07	3.65E-04	4.49E-06	0.00E+00	1.29E-06
I-134	1.11E-07	2.90E-07	1.05E-07	4.94E-06	4.58E-07	0.00E+00	2.55E-09
I-135	4.62E-07	1.18E-06	4.36E-07	7.76E-05	1.86E-06	0.00E+00	8.69E-07
Cs-134	6.28E-05	1.41E-04	6.86E-05	0.00E+00	4.69E-05	1.83E-05	1.22E-06
Cs-136	6.44E-06	2.42E-05	1.71E-05	0.00E+00	1.38E-05	2.22E-06	1.36E-06
Cs-137	8.38E-05	1.06E-04	3.89E-05	0.00E+00	3.80E-05	1.51E-05	1.06E-06
Cs-138	5.82E-08	1.07E-07	5.58E-08	0.00E+00	8.28E-08	9.84E-09	3.38E-11
Ba-139	1.67E-10	1.18E-13	4.87E-12	0.00E+00	1.11E-13	8.08E-07	8.06E-07
Ba-140	6.84E-06	8.38E-09	4.40E-07	0.00E+00	2.85E-09	2.54E-04	2.86E-05
Ba-141	1.78E-11	1.32E-14	5.93E-13	0.00E+00	1.23E-14	4.11E-07	9.33E-14
Ba-142	4.62E-12	4.63E-15	2.84E-13	0.00E+00	3.92E-15	2.39E-07	5.99E-20
Ia-140	5.99E-08	2.95E-08	7.82E-09	0.00E+00	0.00E+00	2.68E-05	6.09E-05
Ia-142	1.20E-10	5.31E-11	1.32E-11	0.00E+00	0.00E+00	1.27E-06	1.50E-06
Ce-141	3.55E-06	2.37E-06	2.71E-07	0.00E+00	1.11E-06	7.67E-05	1.58E-05
Ce-143	3.32E-08	2.42E-08	2.70E-09	0.00E+00	1.08E-08	1.63E-05	3.19E-05
Ce-144	6.11E-04	2.53E-04	3.28E-05	0.00E+00	1.51E-04	1.67E-03	1.08E-04
Pr-143	1.67E-06	6.64E-07	8.28E-08	0.00E+00	3.86E-07	6.04E-05	2.67E-05
Pr-144	5.37E-12	2.20E-12	2.72E-13	0.00E+00	1.26E-12	2.19E-07	2.94E-14
Nd-147	9.83E-07	1.07E-06	6.41E-08	0.00E+00	6.28E-07	4.65E-05	2.28E-05
W-187	1.50E-09	1.22E-09	4.29E-10	0.00E+00	0.00E+00	5.92E-06	2.21E-05
Np-239	4.23E-08	3.99E-09	2.21E-09	0.00E+00	1.25E-08	8.11E-06	1.65E-05

Reference:

Dose Factors for Co-57, Zn-69m, Br-82, Nb-97, Sb-124 and Sb-125 are from NUREG-0172 Age Specific Radiation Dose Commitment Factors for a One Year Chronic Intake, November 1977, Table 7.

All others:

Regulatory Guide 1.109, Table E-8.

NOTE: The tritium dose factor for bone is assumed to be equal to the total body dose factor.

Table 7.7 (5 of 8)
INHALATION DOSE FACTORS
(mrem/pCi inhaled)

Nuclide	CHILD						
	bone	liver	t body	thyroid	kidney	lung	gi-lli
H-3	3.04E-07	3.04E-07	3.04E-07	3.04E-07	3.04E-07	3.04E-07	3.04E-07
C-14	9.70E-06	1.82E-06	1.82E-06	1.82E-06	1.82E-06	1.82E-06	1.82E-06
Na-24	4.35E-06	4.35E-06	4.35E-06	4.35E-06	4.35E-06	4.35E-06	4.35E-06
P-32	7.04E-04	3.09E-05	2.67E-05	0.00E+00	0.00E+00	0.00E+00	1.14E-05
Cr-51	0.00E+00	0.00E+00	4.17E-08	2.31E-08	6.57E-09	4.59E-06	2.93E-07
Mn-54	0.00E+00	1.16E-05	2.57E-06	0.00E+00	2.71E-06	4.26E-04	6.19E-06
Mn-56	0.00E+00	4.48E-10	8.43E-11	0.00E+00	4.52E-10	3.55E-06	3.33E-05
Fe-55	1.28E-05	6.80E-06	2.10E-06	0.00E+00	0.00E+00	3.00E-05	7.75E-07
Fe-59	5.59E-06	9.04E-06	4.51E-06	0.00E+00	0.00E+00	3.43E-04	1.91E-05
Co-57	0.00E+00	2.44E-07	2.88E-07	0.00E+00	0.00E+00	1.37E-04	3.58E-06
Co-58	0.00E+00	4.79E-07	8.55E-07	0.00E+00	0.00E+00	2.99E-04	9.29E-06
Co-60	0.00E+00	3.55E-06	6.12E-06	0.00E+00	0.00E+00	1.91E-03	2.60E-05
Ni-63	2.22E-04	1.25E-05	7.56E-06	0.00E+00	0.00E+00	7.43E-05	1.71E-06
Ni-65	8.08E-10	7.99E-11	4.44E-11	0.00E+00	0.00E+00	2.21E-06	2.27E-05
Cu-64	0.00E+00	5.39E-10	2.90E-10	0.00E+00	1.63E-09	2.59E-06	9.92E-06
Zn-65	1.15E-05	3.06E-05	1.90E-05	0.00E+00	1.93E-05	2.69E-04	4.41E-06
Zn-69	1.81E-11	2.61E-11	2.41E-12	0.00E+00	1.58E-11	3.84E-07	2.75E-06
Zn-69m	4.26E-09	7.28E-09	8.59E-10	0.00E+00	4.22E-09	7.36E-06	2.71E-05
Br-82	0.00E+00	0.00E+00	5.66E-06	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Br-83	0.00E+00	0.00E+00	1.28E-07	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Br-84	0.00E+00	0.00E+00	1.48E-07	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Br-85	0.00E+00	0.00E+00	6.84E-09	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Rb-86	0.00E+00	5.36E-05	3.09E-05	0.00E+00	0.00E+00	0.00E+00	2.16E-06
Rb-88	0.00E+00	1.52E-07	9.90E-08	0.00E+00	0.00E+00	0.00E+00	4.66E-09
Rb-89	0.00E+00	9.33E-08	7.83E-08	0.00E+00	0.00E+00	0.00E+00	5.11E-10
Sr-89	1.62E-04	0.00E+00	4.66E-06	0.00E+00	0.00E+00	5.83E-04	4.52E-05
Sr-90	2.73E-02	0.00E+00	1.74E-03	0.00E+00	0.00E+00	3.99E-03	9.28E-05
Sr-91	3.28E-08	0.00E+00	1.24E-09	0.00E+00	0.00E+00	1.44E-05	4.70E-05
Sr-92	3.54E-09	0.00E+00	1.42E-10	0.00E+00	0.00E+00	6.49E-06	6.55E-05
Y-90	1.11E-06	0.00E+00	2.99E-08	0.00E+00	0.00E+00	7.07E-05	7.24E-05
Y-91m	1.37E-10	0.00E+00	4.98E-12	0.00E+00	0.00E+00	7.60E-07	4.64E-07
Y-91	2.47E-04	0.00E+00	6.59E-06	0.00E+00	0.00E+00	7.10E-04	4.97E-05
Y-92	5.50E-09	0.00E+00	1.57E-10	0.00E+00	0.00E+00	6.46E-06	6.46E-05
Y-93	5.04E-08	0.00E+00	1.38E-09	0.00E+00	0.00E+00	2.01E-05	1.05E-04
Zr-95	5.13E-05	1.13E-05	1.00E-05	0.00E+00	1.61E-05	6.03E-04	1.65E-05
Zr-97	5.07E-08	7.34E-09	4.32E-09	0.00E+00	1.05E-08	3.06E-05	9.49E-05
Nb-95	6.35E-06	2.48E-06	1.77E-06	0.00E+00	2.33E-06	1.66E-04	1.00E-05
Nb-97	1.16E-10	2.08E-11	9.74E-12	0.00E+00	2.31E-11	9.23E-07	7.52E-06
Mo-99	0.00E+00	4.66E-08	1.15E-08	0.00E+00	1.06E-07	3.66E-05	3.42E-05
Tc-99m	4.81E-13	9.41E-13	1.56E-11	0.00E+00	1.37E-11	2.57E-07	1.30E-06
Tc-101	2.19E-14	2.30E-14	2.91E-13	0.00E+00	3.92E-13	1.58E-07	4.41E-09
Ru-103	7.55E-07	0.00E+00	2.90E-07	0.00E+00	1.90E-06	1.79E-04	1.21E-05
Ru-105	4.13E-10	0.00E+00	1.50E-10	0.00E+00	3.63E-10	4.30E-06	2.69E-05
Ru-106	3.68E-05	0.00E+00	4.57E-06	0.00E+00	4.97E-05	3.87E-03	1.16E-04
Ag-110m	4.56E-06	3.08E-06	2.47E-06	0.00E+00	5.74E-06	1.48E-03	2.71E-05

Table 7.7 (6 of 8)
INHALATION DOSE FACTORS
(mrem/pCi inhaled)

Nuclide	CHILD						
	bone	liver	t body	thyroid	kidney	lung	gi-lli
Sb-124	1.55E-05	2.00E-07	5.41E-06	3.41E-08	0.00E+00	8.76E-04	4.43E-05
Sb-125	2.66E-05	2.05E-07	5.59E-06	2.46E-08	0.00E+00	6.27E-04	1.09E-05
Te-125m	1.82E-06	6.29E-07	2.47E-07	5.20E-07	0.00E+00	1.29E-04	9.13E-06
Te-127m	6.72E-06	2.31E-06	8.16E-07	1.64E-06	1.72E-05	4.00E-04	1.93E-05
Te-127	7.49E-10	2.57E-10	1.65E-10	5.30E-10	1.91E-09	2.71E-06	1.52E-05
Te-129m	5.19E-06	1.85E-06	8.22E-07	1.71E-06	1.36E-05	4.76E-04	4.91E-05
Te-129	2.64E-11	9.45E-12	6.44E-12	1.93E-11	6.94E-11	7.93E-07	6.89E-06
Te-131m	3.63E-08	1.60E-08	1.37E-08	2.64E-08	1.08E-07	5.56E-05	8.32E-05
Te-131	5.87E-12	2.28E-12	1.78E-12	4.59E-12	1.59E-11	5.55E-07	3.60E-07
Te-132	1.30E-07	7.36E-08	7.12E-08	8.58E-08	4.79E-07	1.02E-04	3.72E-05
I-130	2.21E-06	4.43E-06	2.28E-06	4.99E-04	6.61E-06	0.00E+00	1.38E-06
I-131	1.30E-05	1.30E-05	7.37E-06	4.39E-03	2.13E-05	0.00E+00	7.68E-07
I-132	5.72E-07	1.10E-06	5.07E-07	5.23E-05	1.69E-06	0.00E+00	8.65E-07
I-133	4.48E-06	5.49E-06	2.08E-06	1.04E-03	9.13E-06	0.00E+00	1.48E-06
I-134	3.17E-07	5.84E-07	2.69E-07	1.37E-05	8.92E-07	0.00E+00	2.58E-07
I-135	1.33E-06	2.36E-06	1.12E-06	2.14E-04	3.62E-06	0.00E+00	1.20E-06
Cs-134	1.76E-04	2.74E-04	6.07E-05	0.00E+00	8.93E-05	3.27E-05	1.04E-06
Cs-136	1.76E-05	4.62E-05	3.14E-05	0.00E+00	2.58E-05	3.93E-06	1.13E-06
Cs-137	2.45E-04	2.23E-04	3.47E-05	0.00E+00	7.63E-05	2.81E-05	9.78E-07
Cs-138	1.71E-07	2.27E-07	1.50E-07	0.00E+00	1.68E-07	1.84E-08	7.29E-08
Ba-139	4.98E-10	2.66E-13	1.45E-11	0.00E+00	2.33E-13	1.56E-06	1.56E-05
Ba-140	2.00E-05	1.75E-08	1.17E-06	0.00E+00	5.71E-09	4.71E-04	2.75E-05
Ba-141	5.29E-11	2.95E-14	1.72E-12	0.00E+00	2.56E-14	7.89E-07	7.44E-08
Ba-142	1.35E-11	9.73E-15	7.54E-13	0.00E+00	7.87E-15	4.44E-07	7.41E-10
La-140	1.74E-07	6.08E-08	2.04E-08	0.00E+00	0.00E+00	4.94E-05	6.10E-05
La-142	3.50E-10	1.11E-10	3.49E-11	0.00E+00	0.00E+00	2.35E-06	2.05E-05
Ce-141	1.06E-05	5.28E-06	7.83E-07	0.00E+00	2.31E-06	1.47E-04	1.53E-05
Ce-143	9.89E-08	5.37E-08	7.77E-09	0.00E+00	2.26E-08	3.12E-05	3.44E-05
Ce-144	1.83E-03	5.72E-04	9.77E-05	0.00E+00	3.17E-04	3.23E-03	1.05E-04
Pr-143	4.99E-06	1.50E-06	2.47E-07	0.00E+00	8.11E-07	1.17E-04	2.63E-05
Pr-144	1.61E-11	4.99E-12	8.10E-13	0.00E+00	2.64E-12	4.23E-07	5.32E-08
Nd-147	2.92E-06	2.36E-06	1.84E-07	0.00E+00	1.30E-06	8.87E-05	2.22E-05
W-187	4.41E-09	2.61E-09	1.17E-09	0.00E+00	0.00E+00	1.11E-05	2.46E-05
Np-239	1.26E-07	9.04E-09	6.35E-09	0.00E+00	2.63E-08	1.57E-05	1.73E-05

Reference:

Dose Factors for Co-57, Zn-69m, Br-82, Nb-97, Sb-124 and Sb-125 are from NUREG-0172 Age Specific Radiation Dose Commitment Factors for a One Year Chronic Intake, November 1977, Table 6.

All others:

Regulatory Guide 1.109, Table E-9.

NOTE: The tritium dose factor for bone is assumed to be equal to the total body dose factor.

Table 7.7 (7 of 8)
INHALATION DOSE FACTORS
(mrem/pCi inhaled)

Nuclide	INFANT						
	bone	liver	t body	thyroid	kidney	lung	gi-lli
H-3	4.62E-07	4.62E-07	4.62E-07	4.62E-07	4.62E-07	4.62E-07	4.62E-07
C-14	1.89E-05	3.79E-06	3.79E-06	3.79E-06	3.79E-06	3.79E-06	3.79E-06
Na-24	7.54E-06	7.54E-06	7.54E-06	7.54E-06	7.54E-06	7.54E-06	7.54E-06
P-32	1.45E-03	8.03E+05	5.53E-05	0.00E+00	0.00E+00	0.00E+00	1.15E-05
Cr-51	0.00E+00	0.00E+00	6.39E-08	4.11E-08	9.45E-09	9.17E-06	2.55E-07
Mn-54	0.00E+00	1.81E-05	3.56E-06	0.00E+00	3.56E-06	7.14E-04	5.04E-06
Mn-56	0.00E+00	1.10E-09	1.58E-10	0.00E+00	7.86E-10	8.95E-06	5.12E-05
Fe-55	1.41E-05	8.39E-06	2.38E-06	0.00E+00	0.00E+00	6.21E-05	7.82E-07
Fe-59	9.69E-06	1.68E-05	6.77E-06	0.00E+00	0.00E+00	7.25E-04	1.77E-05
Co-57	0.00E+00	4.65E-07	4.58E-07	0.00E+00	0.00E+00	2.71E-04	3.47E-06
Co-58	0.00E+00	8.71E-07	1.30E-06	0.00E+00	0.00E+00	5.55E-04	7.95E-06
Co-60	0.00E+00	5.73E-06	8.41E-06	0.00E+00	0.00E+00	3.22E-03	2.28E-05
Ni-63	2.42E-04	1.46E-05	8.29E-06	0.00E+00	0.00E+00	1.49E-04	1.73E-06
Ni-65	1.71E-09	2.03E-10	8.79E-11	0.00E+00	0.00E+00	5.80E-06	3.58E-05
Cu-64	0.00E+00	1.34E-09	5.53E-10	0.00E+00	2.84E-09	6.64E-06	1.07E-05
Zn-65	1.38E-05	4.47E-05	2.22E-05	0.00E+00	2.32E-05	4.62E-04	3.67E-05
Zn-69	3.85E-11	6.91E-11	5.13E-12	0.00E+00	2.87E-11	1.05E-06	9.44E-06
Zn-69m	8.98E-09	1.84E-08	1.67E-09	0.00E+00	7.45E-09	1.91E-05	2.92E-05
Br-82	0.00E+00	0.00E+00	9.49E-06	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Br-83	0.00E+00	0.00E+00	2.72E-07	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Br-84	0.00E+00	0.00E+00	2.86E-07	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Br-85	0.00E+00	0.00E+00	1.46E-08	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Rb-86	0.00E+00	1.36E-04	6.30E-05	0.00E+00	0.00E+00	0.00E+00	2.17E-06
Rb-88	0.00E+00	3.98E-07	2.05E-07	0.00E+00	0.00E+00	0.00E+00	2.42E-07
Rb-89	0.00E+00	2.29E-07	1.47E-07	0.00E+00	0.00E+00	0.00E+00	4.87E-08
Sr-89	2.84E-04	0.00E+00	8.15E-06	0.00E+00	0.00E+00	1.45E-03	4.57E-05
Sr-90	2.92E-02	0.00E+00	1.85E-03	0.00E+00	0.00E+00	8.03E-03	9.36E-05
Sr-91	6.83E-08	0.00E+00	2.47E-09	0.00E+00	0.00E+00	3.76E-05	5.24E-05
Sr-92	7.50E-09	0.00E+00	2.79E-10	0.00E+00	0.00E+00	1.70E-05	1.00E-04
Y-90	2.35E-06	0.00E+00	6.30E-08	0.00E+00	0.00E+00	1.92E-04	7.43E-05
Y-91m	2.91E-10	0.00E+00	9.90E-12	0.00E+00	0.00E+00	1.99E-06	1.68E-06
Y-91	4.20E-04	0.00E+00	1.12E-05	0.00E+00	0.00E+00	1.75E-03	5.02E-05
Y-92	1.17E-08	0.00E+00	3.29E-10	0.00E+00	0.00E+00	1.75E-05	9.04E-05
Y-93	1.07E-07	0.00E+00	2.91E-09	0.00E+00	0.00E+00	5.46E-05	1.19E-04
Zr-95	8.24E-05	1.99E-05	1.45E-05	0.00E+00	2.22E-05	1.25E-03	1.55E-05
Zr-97	1.07E-07	1.83E-08	8.36E-09	0.00E+00	1.85E-08	7.88E-05	1.00E-04
Nb-95	1.12E-05	4.59E-06	2.70E-06	0.00E+00	3.37E-06	3.42E-04	9.05E-06
Nb-97	2.44E-10	5.21E-11	1.88E-11	0.00E+00	4.07E-11	2.37E-06	1.92E-05
Mo-99	0.00E+00	1.18E-07	2.31E-08	0.00E+00	1.89E-07	9.63E-05	3.48E-05
Tc-99m	9.98E-13	2.06E-12	2.66E-11	0.00E+00	2.22E-11	5.79E-07	1.45E-06
Tc-101	4.65E-14	5.88E-14	5.80E-13	0.00E+00	6.99E-13	4.17E-07	6.03E-07
Ru-103	1.44E-06	0.00E+00	4.85E-07	0.00E+00	3.03E-06	3.94E-04	1.15E-05
Ru-105	8.74E-10	0.00E+00	2.93E-10	0.00E+00	6.42E-10	1.12E-05	3.46E-05
Ru-106	6.20E-05	0.00E+00	7.77E-06	0.00E+00	7.61E-05	8.26E-03	1.17E-04
Ag-110m	7.13E-06	5.16E-06	3.57E-06	0.00E+00	7.80E-06	2.62E-03	2.36E-05

Table 7.7 (8 of 8)
INHALATION DOSE FACTORS
(mrem/pCi inhaled)

Nuclide	INFANT						
	bone	liver	t body	thyroid	kidney	lung	gi-lli
Sb-124	2.71E-05	3.97E-07	8.56E-06	7.18E-08	0.00E+00	1.89E-03	4.22E-05
Sb-125	3.69E-05	3.41E-07	7.78E-06	4.45E-08	0.00E+00	1.17E-03	1.05E-05
Te-125m	3.40E-06	1.42E-06	4.70E-07	1.16E-06	0.00E+00	3.19E-04	9.22E-06
Te-127m	1.19E-05	4.93E-06	1.48E-06	3.48E-06	2.68E-05	9.37E-04	1.95E-05
Te-127	1.59E-09	6.81E-10	3.49E-10	1.32E-09	3.47E-09	7.39E-06	1.74E-05
Te-129m	1.01E-05	4.35E-06	1.59E-06	3.91E-06	2.27E-05	1.20E-03	4.93E-05
Te-129	5.63E-11	2.48E-11	1.34E-11	4.82E-11	1.25E-10	2.14E-06	1.88E-05
Te-131m	7.62E-08	3.93E-08	2.59E-08	6.38E-08	1.89E-07	1.42E-04	8.51E-05
Te-131	1.24E-11	5.87E-12	3.57E-12	1.13E-11	2.85E-11	1.47E-06	5.87E-06
Te-132	2.66E-07	1.69E-07	1.26E-07	1.99E-07	7.39E-07	2.43E-04	3.15E-05
I-130	4.54E-06	9.91E-06	3.98E-06	1.14E-03	1.09E-05	0.00E+00	1.42E-06
I-131	2.71E-05	3.17E-05	1.40E-05	1.06E-02	3.70E-05	0.00E+00	7.56E-07
I-132	1.21E-06	2.53E-06	8.99E-07	1.21E-04	2.82E-06	0.00E+00	1.36E-06
I-133	9.46E-06	1.37E-05	4.00E-06	2.54E-03	1.60E-05	0.00E+00	1.54E-06
I-134	6.58E-07	1.34E-06	4.75E-07	3.18E-05	1.49E-06	0.00E+00	9.21E-07
I-135	2.76E-06	5.43E-06	1.98E-06	4.97E-04	6.05E-06	0.00E+00	1.31E-06
Cs-134	2.83E-04	5.02E-04	5.32E-05	0.00E+00	1.36E-04	5.69E-05	9.53E-07
Cs-136	3.45E-05	9.61E-05	3.78E-05	0.00E+00	4.03E-05	8.40E-06	1.02E-06
Cs-137	3.92E-04	4.37E-04	3.25E-05	0.00E+00	1.23E-04	5.09E-05	9.53E-07
Cs-138	3.61E-07	5.58E-07	2.84E-07	0.00E+00	2.93E-07	4.67E-08	6.26E-07
Ba-139	1.06E-09	7.03E-13	3.07E-11	0.00E+00	4.23E-13	4.25E-06	3.64E-05
Ba-140	4.00E-05	4.00E-08	2.07E-06	0.00E+00	9.59E-09	1.14E-03	2.74E-05
Ba-141	1.12E-10	7.70E-14	3.55E-12	0.00E+00	4.64E-14	2.12E-06	3.39E-06
Ba-142	2.84E-11	2.36E-14	1.40E-12	0.00E+00	1.36E-14	1.11E-06	4.95E-07
La-140	3.61E-07	1.43E-07	3.68E-08	0.00E+00	0.00E+00	1.20E-04	6.06E-05
La-142	7.36E-10	2.69E-10	6.46E-11	0.00E+00	0.00E+00	5.87E-06	4.25E-05
Ce-141	1.98E-05	1.19E-05	1.42E-06	0.00E+00	3.75E-06	3.69E-04	1.54E-05
Ce-143	2.09E-07	1.38E-07	1.58E-08	0.00E+00	4.03E-08	8.30E-05	3.55E-05
Ce-144	2.28E-03	8.65E-04	1.26E-04	0.00E+00	3.84E-04	7.03E-03	1.06E-04
Pr-143	1.00E-05	3.74E-06	4.99E-07	0.00E+00	1.41E-06	3.09E-04	2.66E-05
Pr-144	3.42E-11	1.32E-11	1.72E-12	0.00E+00	4.80E-12	1.15E-06	3.06E-06
Nd-147	5.67E-06	5.81E-06	3.57E-07	0.00E+00	2.25E-06	2.30E-04	2.23E-05
W-187	9.26E-09	6.44E-09	2.23E-09	0.00E+00	0.00E+00	2.83E-05	2.54E-05
Np-239	2.65E-07	2.37E-08	1.34E-08	0.00E+00	4.73E-08	4.25E-05	1.78E-05

Reference:

Dose Factors for Co-57, Zn-69m, Br-82, Nb-97, Sb-124 and Sb-125 are from NUREG-0172 Age Specific Radiation Dose Commitment Factors for a One Year Chronic Intake, November 1977, Table 5.

All others:

Regulatory Guide 1.109, Table E-10.

NOTE: The tritium dose factor for bone is assumed to be equal to the total body dose factor.

Figure 7.1

OFFGAS SYSTEM AND STANDBY GAS TREATMENT SYSTEM EFFLUENT MONITORING



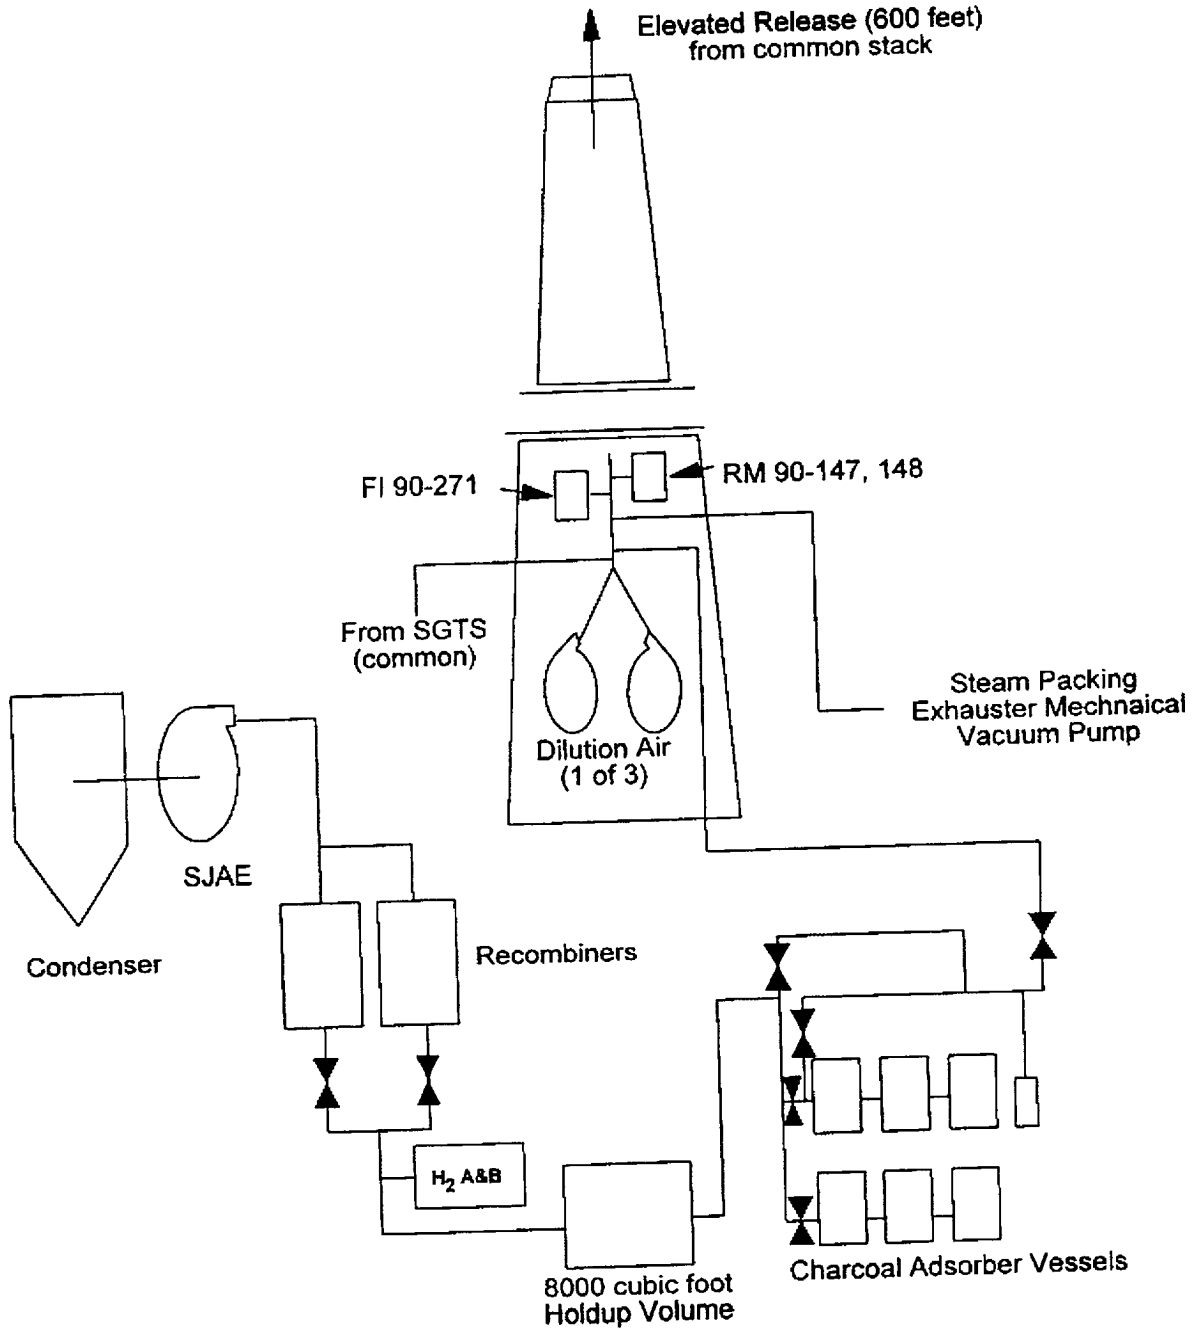


Figure 7.2
NORMAL BUILDING VENTILATION

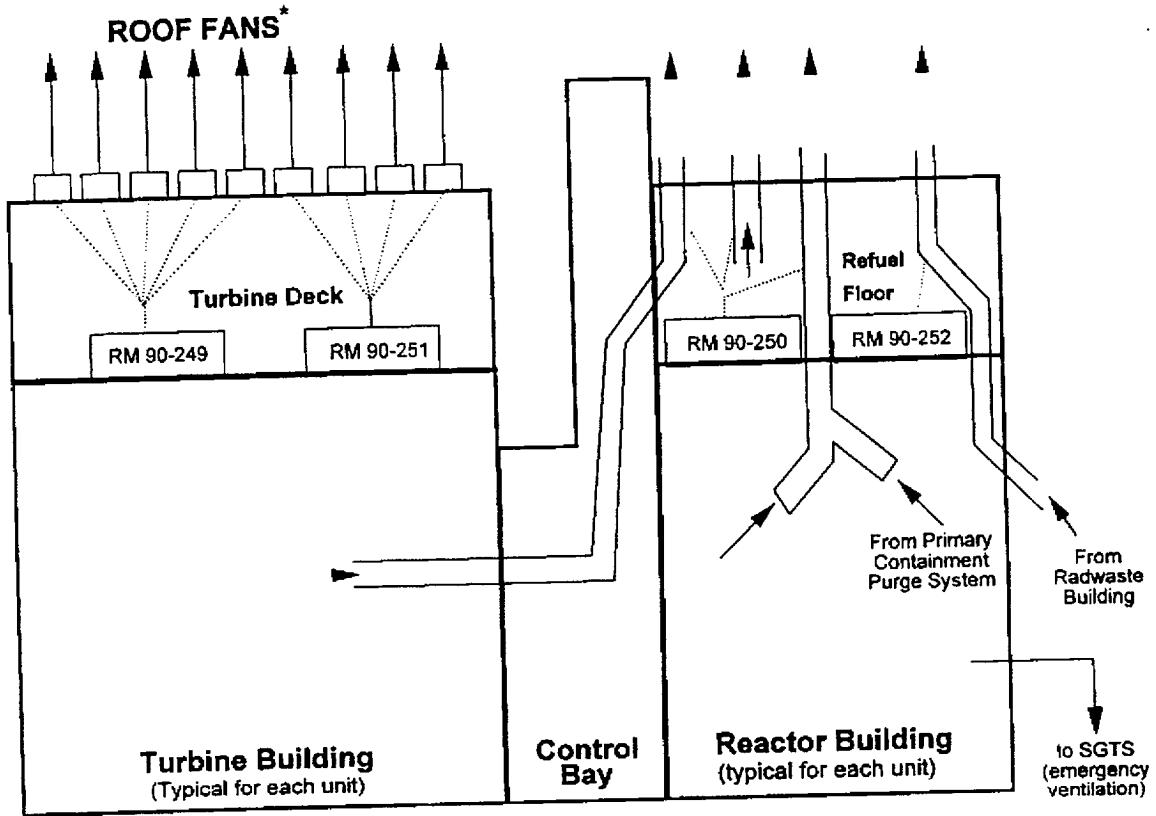


* Used seasonally to control temperature

Figure 7.3
PLUME DEPLETION EFFECT
(Page 1 of 4)

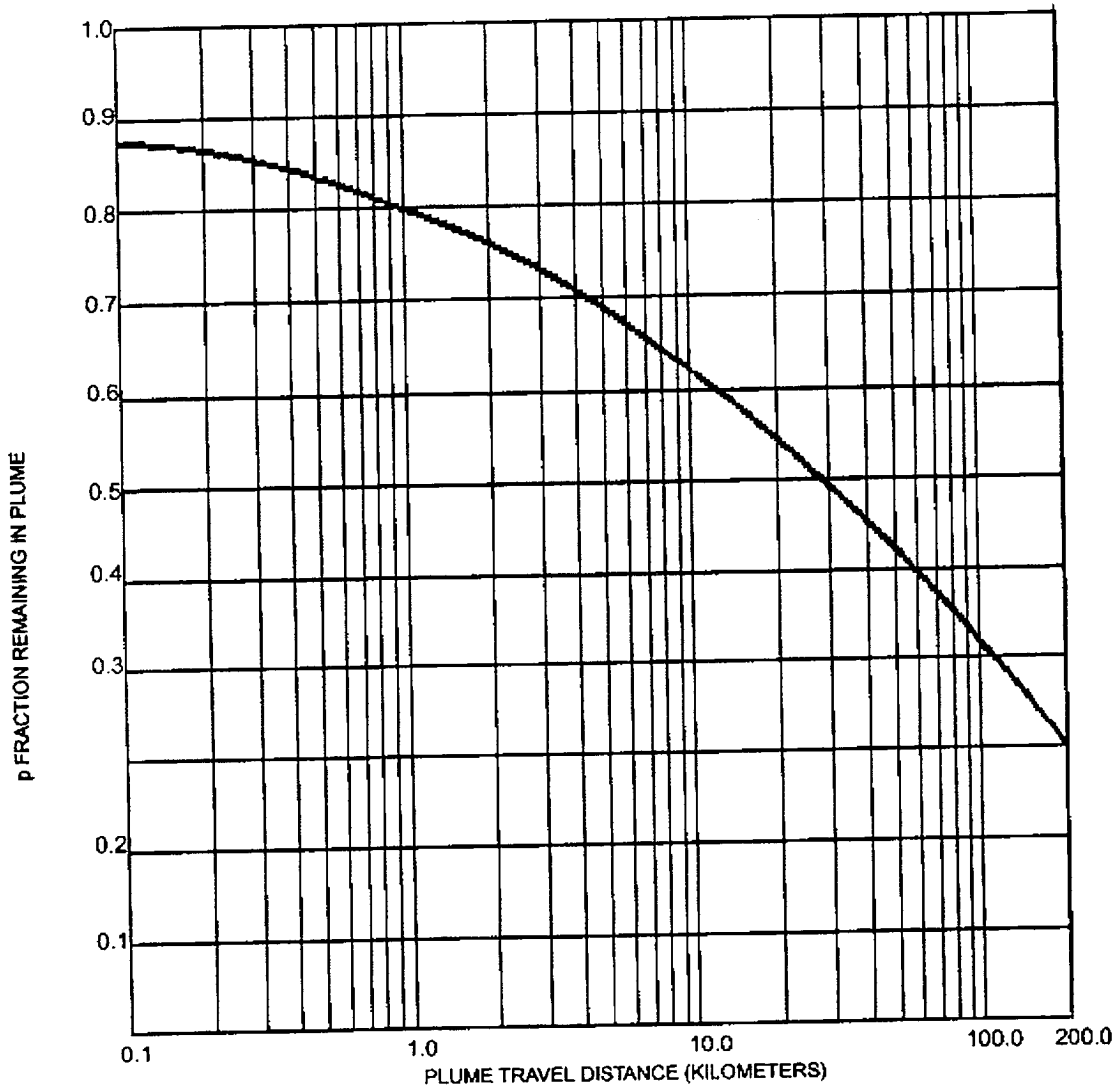


Plume Depletion Effect for Ground-Level Releases (All Stability Classes)

Figure 7.3
PLUME DEPLETION EFFECT
(Page 2 of 4)

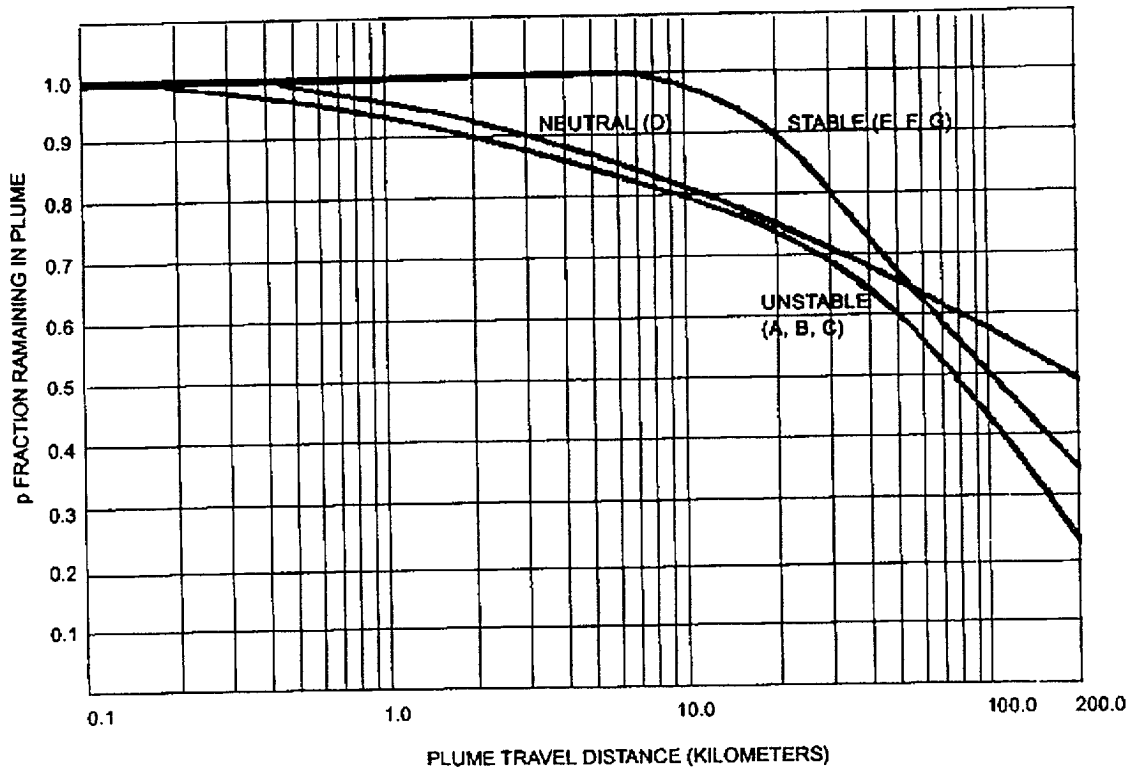


Plume Depletion Effect for 30 meter Releases (Letters denote Pasquill Stability Class)

Figure 7.3
PLUME DEPLETION EFFECT
(Page 3 of 4)

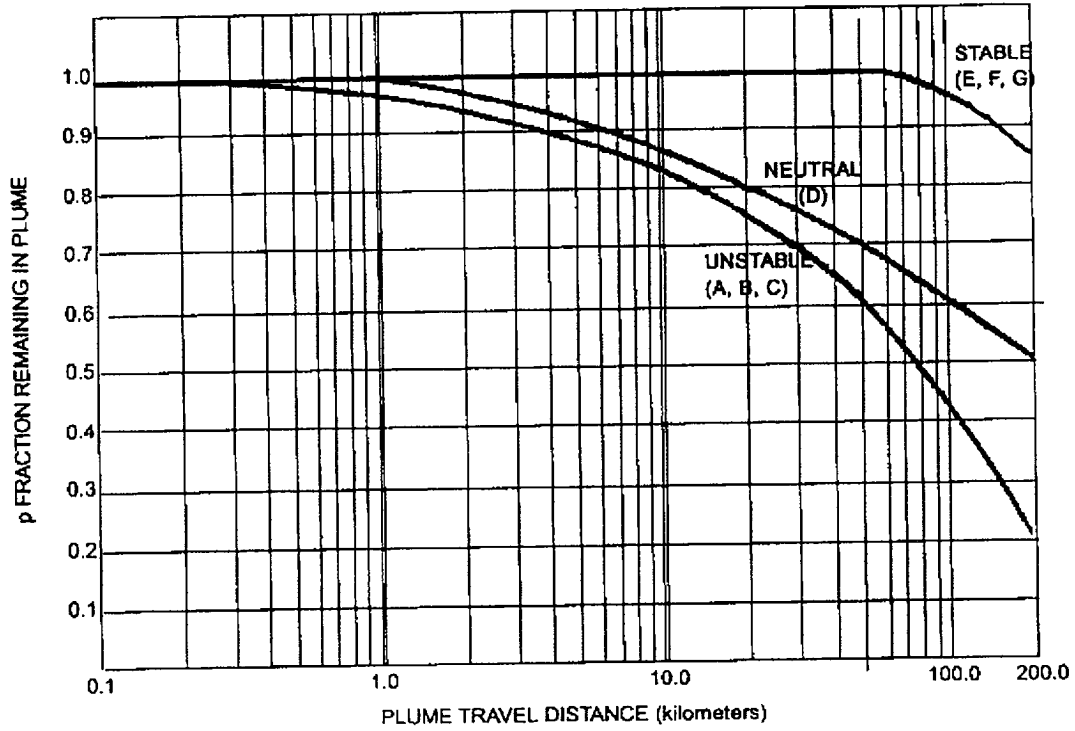


Plume Depletion Effect for 60 meter Releases (Letters denote Pasquill Stability Class)

Figure 7.3
PLUME DEPLETION EFFECT
(Page 4 of 4)

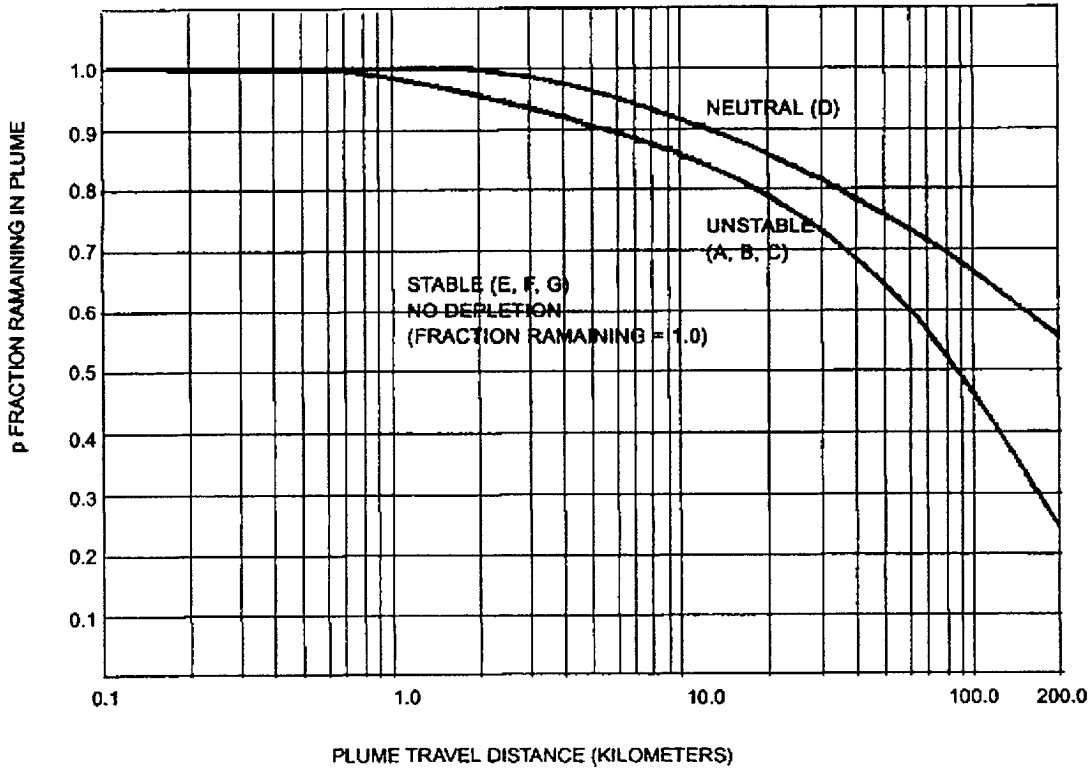


Plume Depletion Effect for 100 meter Releases (Letters denote Pasquill Stability Class)

Figure 7.4
VERTICAL STANDARD DEVIATION OF MATERIAL IN A PLUME

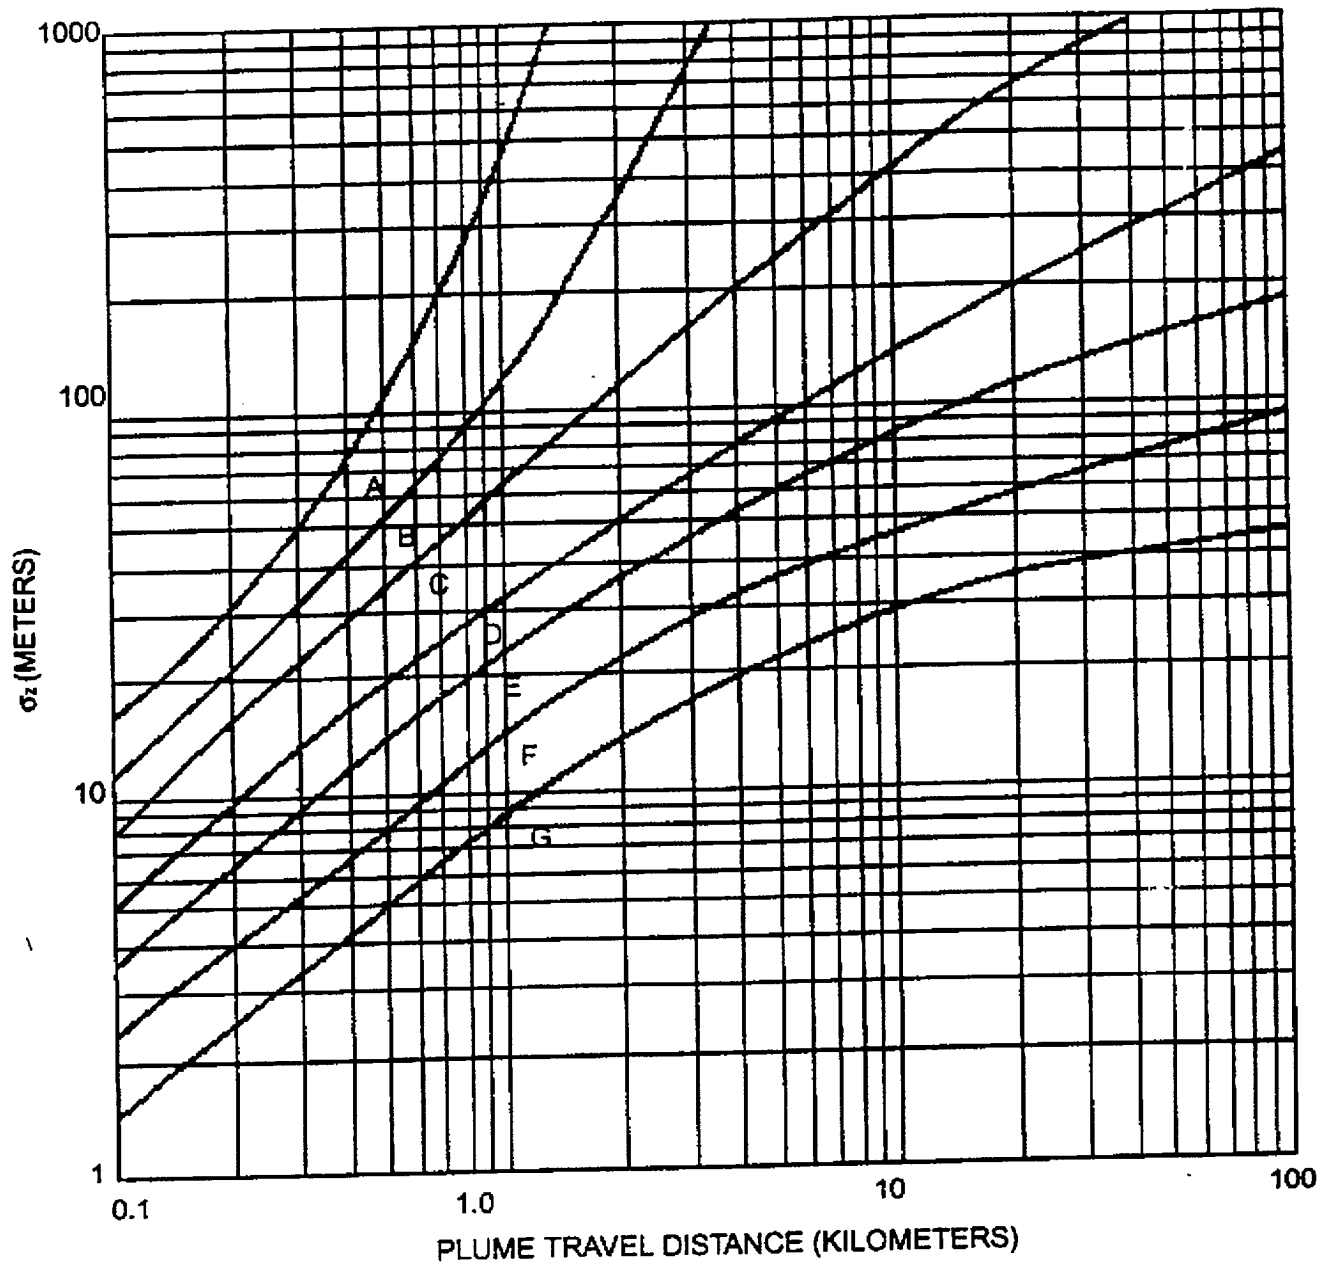


Vertical Standard Deviation of Material in a Plume
(Letters denote Pasquill Stability Class)

Figure 7.5
RELATIVE DEPOSITION
(Page 1 of 4)

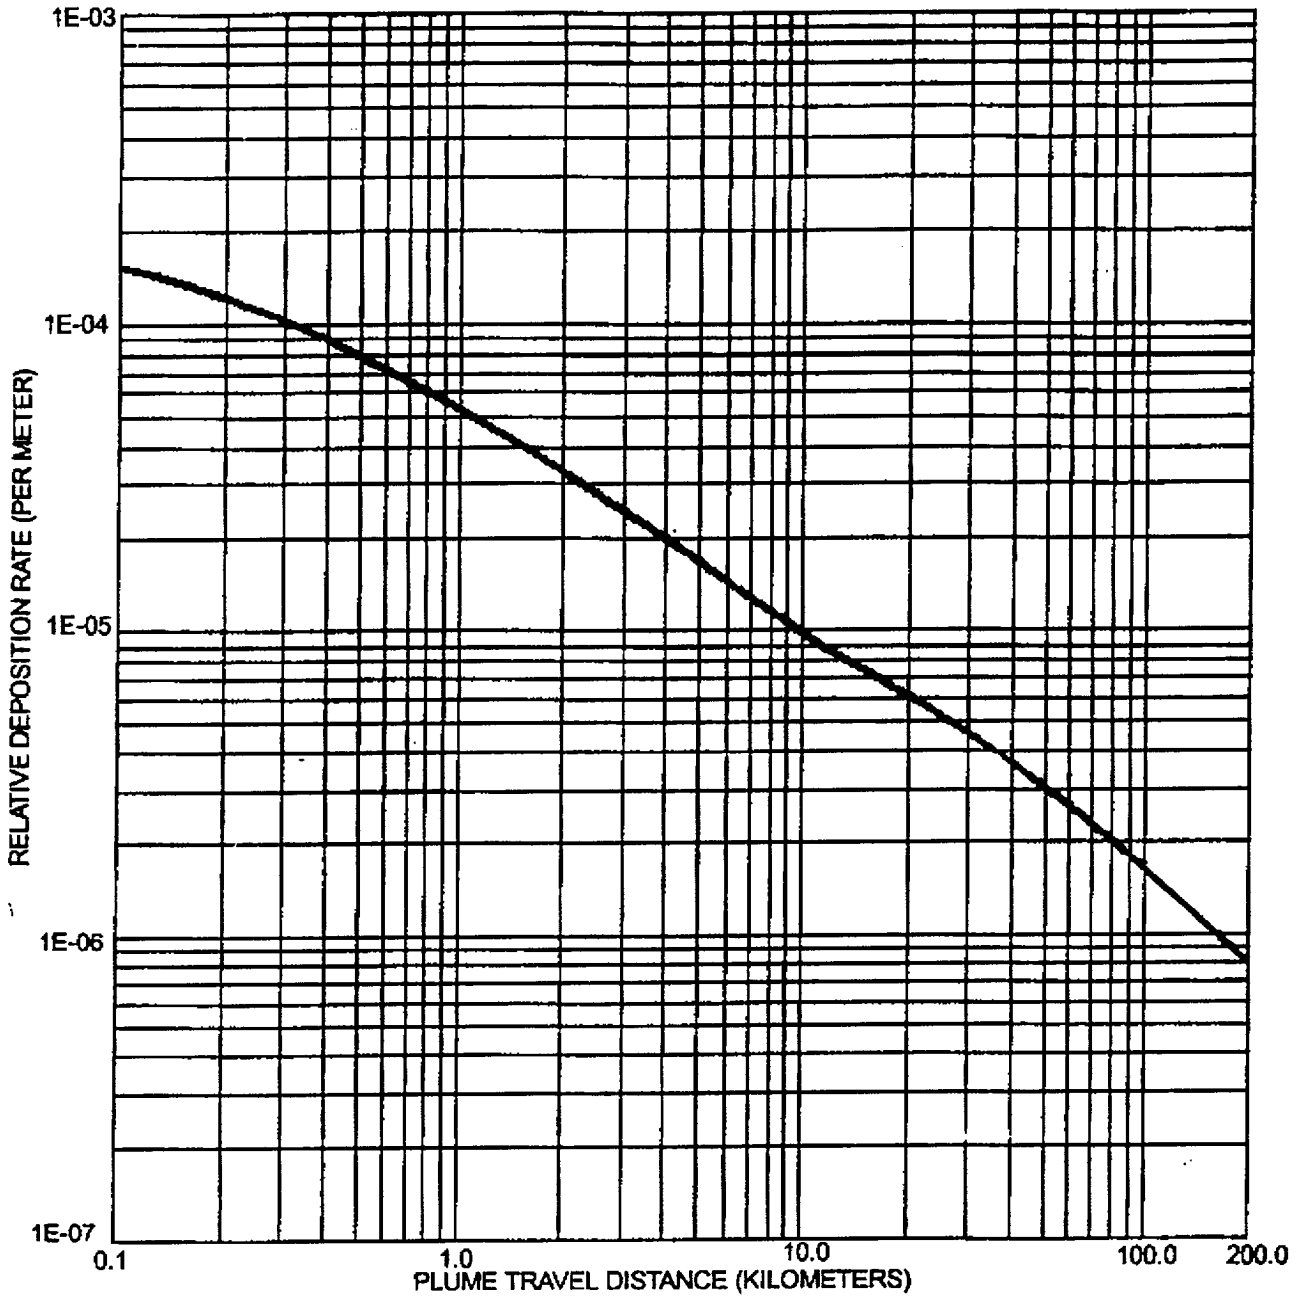


Relative Deposition for Ground-Level Releases (All Atmospheric Stability Classes)

Figure 7.5
RELATIVE DEPOSITION
(Page 2 of 4)

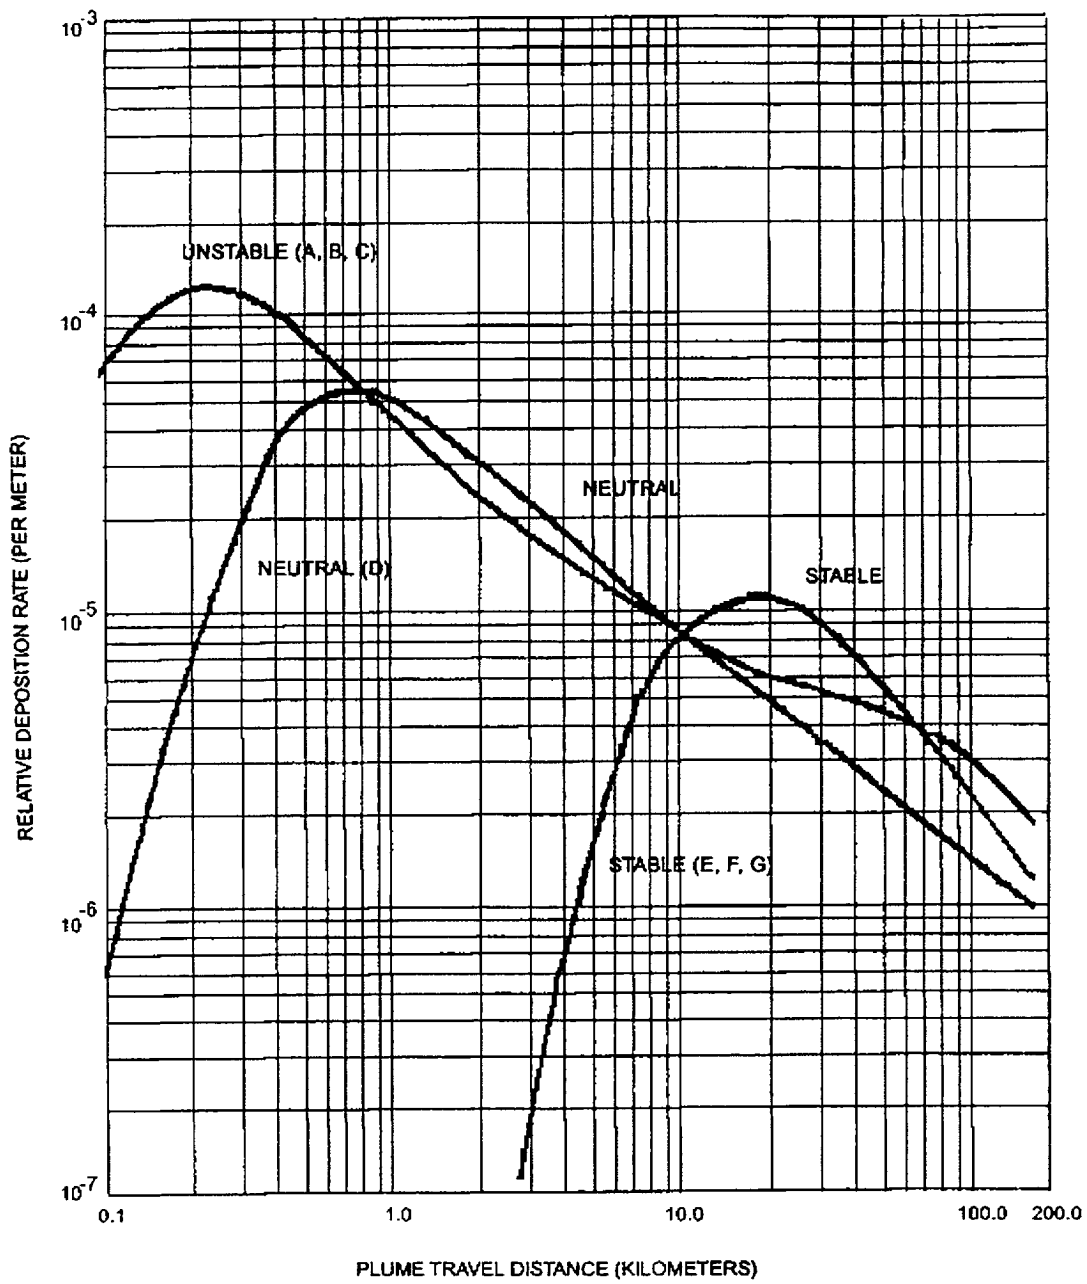


Plume Depletion Effect for 30 meter Releases (Letters denote Pasquill Stability Class)

Figure 7.5
RELATIVE DEPOSITION
(Page 3 of 4)

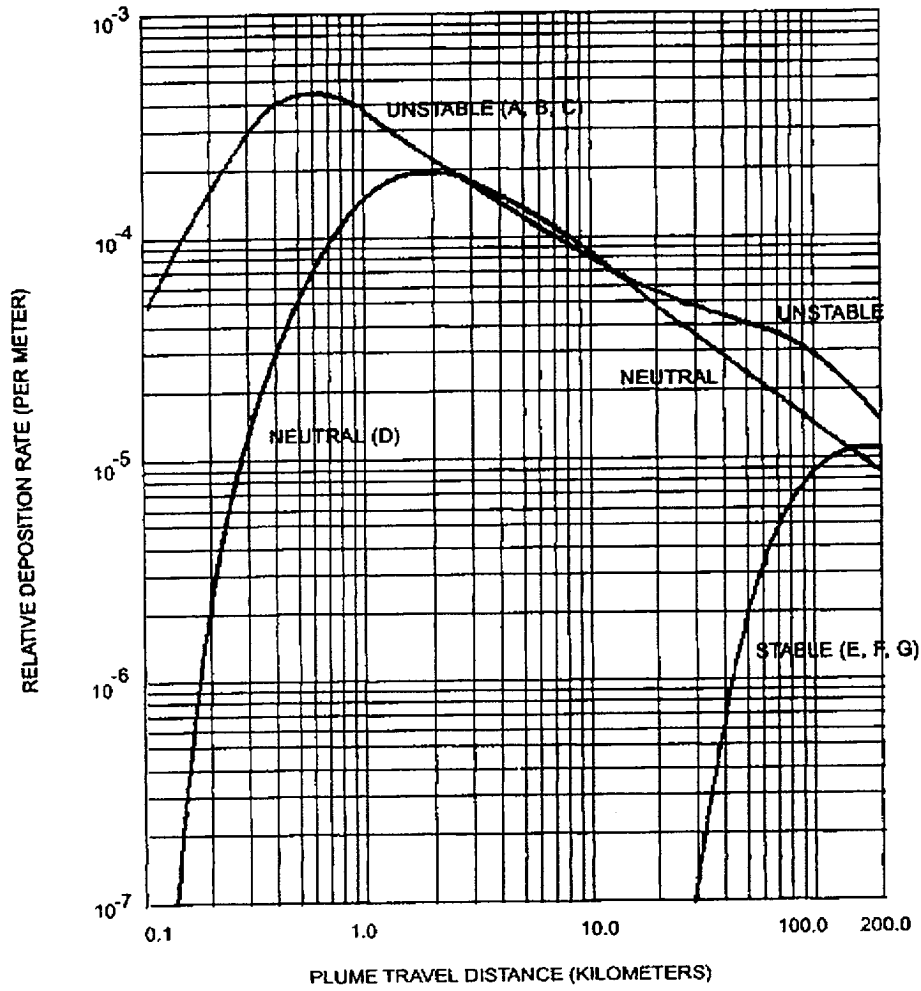

Plume Depletion Effect for 60 meter Releases (Letters denote Pasquill Stability Class)

Figure 7.5
RELATIVE DEPOSITION
(Page 4 of 4)

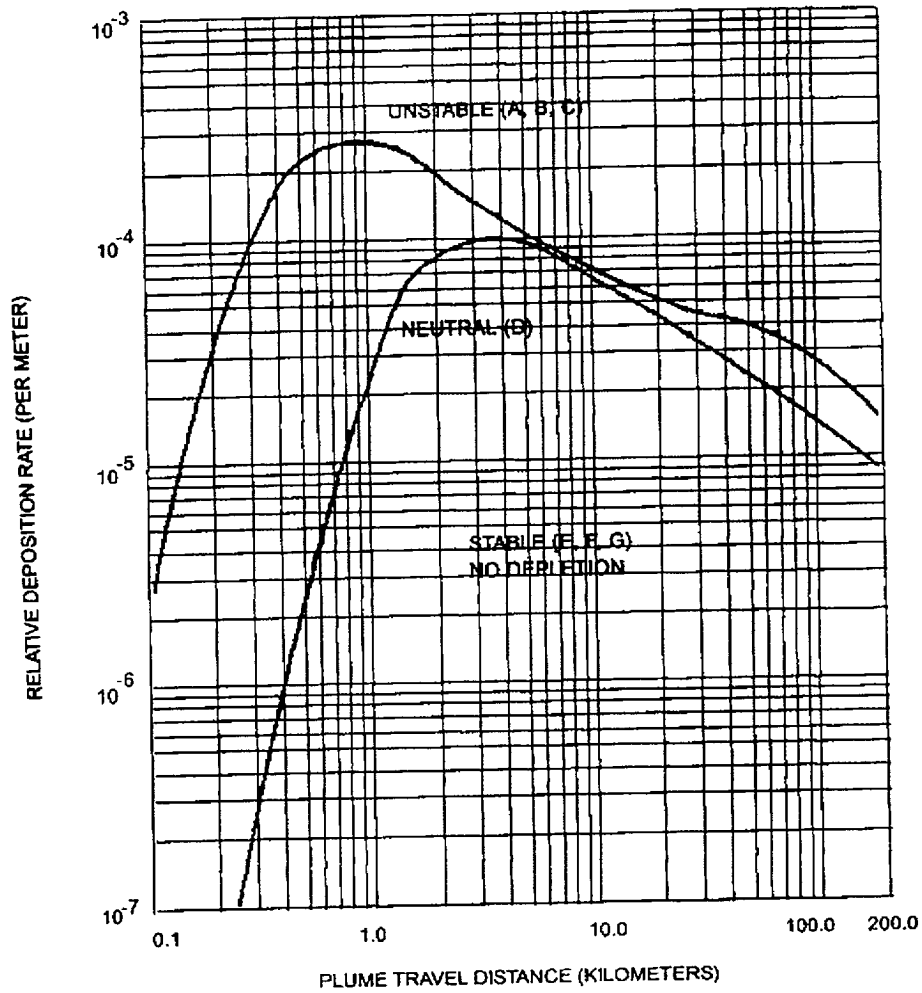

Plume Depletion Effect for 100 meter Releases (Letters denote Pasquill Stability Class)

SECTION 8.0

TOTAL DOSE

8.0 TOTAL DOSE

To determine compliance with 40 CFR 190, the annual dose contributions to the maximum individual from BFN radioactive effluents and all other nearby uranium fuel cycle sources will be considered. The annual dose to the maximum individual will be conservatively estimated by: first, summing the total body air submersion dose, and the maximum (critical) organ dose (except thyroid) from gaseous effluents; the total body dose, and maximum organ dose (except thyroid) from liquid effluents for each quarter calculated in accordance with Sections 6.6 and 7.7. Then to this sum for each quarter is added any identifiable increase in direct radiation dose levels attributable to the plant as determined by the REMP outlined in Section 9.0. These quarterly sums are then conservatively summed for the four calendar quarters to estimate the maximum individual dose for the year. This dose is compared to the limit in Control 1.2.3, i.e., 25 mrem per year to the total body or any organ (except thyroid), to determine compliance.

The total annual thyroid dose to the maximum individual will be conservatively estimated in the following manner. For each calendar quarter, a total dose will be obtained by summing the total body gaseous submersion dose, the gaseous thyroid dose, the liquid total body dose, and the liquid thyroid dose. To this sum for each quarter is added any identifiable increase in direct radiation dose levels attributable to the plant as determined by the REMP outlined in Section 9.0. These quarterly sums are then added together to estimate the maximum individual thyroid dose for the year. This dose is compared to the limit in Control 1.2.3, i.e., 75 mrem per year to determine compliance.

SECTION 9.0

RADIOLOGICAL ENVIRONMENTAL MONITORING PROGRAM

9.1 MONITORING PROGRAM DESCRIPTION

A Radiological Environmental Monitoring Program (REMP) as described in Tables 9.1, 9.2, and 9.3 and in Figures 9.1, 9.2, and 9.3 shall be conducted. Results of this program shall be reported in accordance with ODCM Administrative Control 5.1.

The atmospheric REMP shall consist of 11 monitoring stations from which samples of air particulates and radioiodine shall be collected.

The terrestrial monitoring program shall consist of the collection of milk, soil, drinking water, and food crops. In addition, direct gamma radiation levels will be measured at 40 or more locations in the vicinity of the plant.

The reservoir sampling program shall consist of the collection of samples of surface water, sediment, and fish.

9.2 DETECTION CAPABILITIES

Analytical techniques shall be such that the detection capabilities listed in Table 2.3-2 are achieved.

9.3 LAND USE CENSUS

A land use survey shall be conducted in accordance with the requirements in Control 1.3.2. The results of the survey shall be reported in the Annual Radiological Environmental Operating Report.

9.4 INTERLABORATORY COMPARISON PROGRAM

Analyses shall be performed on radioactive materials supplied as part of an Interlaboratory Comparison Program which has been approved by the NRC. A summary of the results obtained in the intercomparison shall be included in the Annual Radiological Environmental Operating Report.

If analyses are not performed as required corrective actions taken to prevent a recurrence shall be reported in the Annual Radiological Environmental Operating Report.

Table 9.1 (1 of 5)
RADIOLOGICAL ENVIRONMENTAL MONITORING PROGRAM

<u>Exposure Pathway and/or Sample</u>	<u>Number of Samples and Sample Locations</u>	<u>Sampling and Collection Frequency</u>	<u>Type and Frequency of Analysis</u>
AIRBORNE Particulates	6 samples from locations (in different sectors) at or near the site boundary (LM-1, LM-2, LM-3, LM-4, LM-6, and LM-7) 2 samples from control locations greater than 10 miles from the plant (RM-1 and RM-6) 3 samples from locations in communities approximately 10 miles from the plant (PM-1, PM-2 and PM-3)	Continuous sampler operation with sample collection as required by dust loading but at least once per 7 days.	Particulate sampler. Analyze for gross beta radioactivity ≥ 24 hrs following filter change. Perform gamma isotopic analysis on each sample when gross beta activity is >10 times the average of control samples. Perform gamma isotopic analysis on composite (by location) sample at least once per 31 days.
Radioiodine	Same locations as air particulates	Continuous sampler operation with charcoal canister collection at least once per 7 days	I-131 every 7 days
SOIL	Samples from same locations as air particulates	Once every year	Gamma scan, Sr-89, Sr-90 once per year
DIRECT	2 or more dosimeters placed at locations (in different sectors) at or near the site boundary in each of the 16 sectors	At least once per 92 days	Gamma dose once per 92 days

Table 9.1 (2 of 5)
RADIOLOGICAL ENVIRONMENTAL MONITORING PROGRAM

<u>Exposure Pathway and/or Sample</u>	<u>Number of Samples and Sample Locations</u>	<u>Sampling and Collection Frequency</u>	<u>Type and Frequency of Analysis</u>
DIRECT (con- tinued)	2 or more dosi- meters placed at stations located approximately 5 miles from the plant in each of the 16 sectors 2 or more dosi- meters in at least 8 additional locations of special interest	At least once per 92 days.	Gamma dose once per 92 days.
WATERBORNE Surface	1 sample upstream (TRM 306.0) 1 sample im- mediately down- stream of dis- charge (TRM 293.5)	Collected by auto- matic sequential- type sampler with composite sample taken at least once per 31 days ^a .	Gamma scan at least once per 31 days. Composite for tritium at least once per 92 days
Drinking	1 sample at the first potable surface water supply downstream from the plant (TRM 286.5)	Collected by auto- matic sequential- type sampler with composite sample taken at least once per 31 days ^{a,b}	Gross beta and gamma scan at least once per 31 days. Compo- site for tritium at least once per 92 days.

^a Composite samples shall be collected by collecting an aliquot at intervals not exceeding 2 hours.

^b This assumes that the nearest drinking water intake is >3.0 mile downstream of the plant discharge. If a drinking water intake is constructed within 3.0 miles downstream of the plant discharge, sampling and analysis shall be every 2 weeks.

Table 9.1 (3 of 5)
RADIOLOGICAL ENVIRONMENTAL MONITORING PROGRAM

<u>Exposure Pathway and/or Sample</u>	<u>Number of Samples and Sample Locations</u>	<u>Sampling and Collection Frequency</u>	<u>Type and Frequency of Analysis</u>
Drinking (continued)	4 additional samples of potable surface water downstream from the plant (TRM 282.6, TRM 274.9, TRM 259.8, and TRM 259.6)	Grab sample taken at least once per 31 days.	Gross beta and gamma scan at least once per 31 days. Composite for tritium at least once per 92 days
	1 sample at a control location ^c (TRM 306)	Collected by automatic sequential-type sampler with composite sample taken at least once per 31 days ^a	
GROUND	1 sample adjacent to the plant (well #6)	Collected by automatic sequential-type sampler with composite sample taken at least once per 31 days.	Composite for gamma scan and tritium at least once per 92 days.
	1 sample at a control location upgradient from the plant (Farm Bn)	Grab sample taken at least once per 31 days.	Composite for gamma scan and tritium at least once per 92 days.
AQUATIC			
Shoreline Sediment	1 sample upstream from a recreational area (TRM 305)	At least once per 184 days	Gamma scan of each sample

^a Composite samples shall be collected by collecting an aliquot at intervals not exceeding 2 hours.

^c The surface water control sample shall be considered a control for the drinking water sample.

Table 9.1 (4 of 5)
RADIOLOGICAL ENVIRONMENTAL MONITORING PROGRAM

<u>Exposure Pathway and/or Sample</u>	<u>Number of Samples and Sample Locations</u>	<u>Sampling and Collection Frequency</u>	<u>Type and Frequency of Analysis</u>
Shoreline Sediment (continued)	1 sample from each of at least two downstream locations with with recreational use. (TRM 293 and 279.5)	At least once per 184 days	Gamma scan of each sample

INGESTION

Milk	*** ****	At least once per 15 days when animals are on pasture; at least once per 31 days at other times.	Gamma scan and I-131 on each sample. Sr-89 and Sr-90 at least once per 92 days
------	-----------------	--	---

*** Samples from milking animals in three locations within 5 km distance having the highest dose potential as identified in the annual land use survey. If there are none, then one sample from milking animals in each of three areas between 5 to 8 km distant where doses are calculated to be greater than 1 mrem per year. Milk samples will be collected as required by FSAR Section 2.6.2.2. There are currently no locations meeting this criteria; however, a dairy farm between 9 and 15 km is being sampled.

**** One sample from milking at a control location 15 to 30 km distant and in the least prevalent wind direction.

Fish	2 samples repre- sents commercial and game species in Gunterville Reservoir above the plant 2 samples repres- ents commercial and game species in Wheeler Reservoir near the plant	At least once per 184 days	Gamma scan at least once per 184 days on edible portions.
------	--	-------------------------------	---

Table 9.1 (5 of 5)
RADIOLOGICAL ENVIRONMENTAL MONITORING PROGRAM

<u>Exposure Pathway and/or Sample</u>	<u>Number of Samples and Sample Locations</u>	<u>Sampling and Collection Frequency</u>	<u>Type and Frequency of Analysis</u>
Fruits & Vegetables	Samples of food crops such as corn, green beans, tomatoes, and potatoes grown at private gardens and/or farms in the immediate vicinity of the plant 1 sample of each of the same foods grown at greater than 10 miles distance from the plant	At least once per year at time of harvest	Gamma scan on edible portion
Vegetation (pasturage)	Samples from farms producing milk but not providing a milk sample. Control sample from 1 control dairy farm. Vegetation sampled only if milk is produced but not sampled.	Once per 31 days	I-131, gamma scan once per 31 days.

Table 9.2
RADIOLOGICAL ENVIRONMENTAL MONITORING PROGRAM SAMPLING LOCATIONS

Map Location	Station	Sector	Approximate Distance (Miles)	Indicator (I) or Control (C)	Samples Collected ^b
1	PM-1	NW	13.8	I	AP, CF, S
2	PM-2	NE	10.9	I	AP, CF, S
3	PM-3	SSE	7.5	I	AP, CF, S
4	LM-7	W	2.1	I	AP, CF, S
5	RM-1	W	31.3	C	AP, CF, S
6	RM-6	E	24.2	C	AP, CF, S
7	LM-1	N	1.0	I	AP, CF, S
8	LM-2	NNE	0.9	I	AP, CF, S
9	LM-3	ENE	0.9	I	AP, CF, S
10	LM-4	NNW	1.7	I	AP, CF, S
11	LM-6	SSW	3.0	I	AP, CF, S
12	Farm B	NNW	6.8	I	M
13	Farm Bn	N	5.0	I	W
19	Farm R	SW	12.5	C	M
22	Well #6	NW	0.02	I	W
23	TRM ^c 282.6	-	11.4 ^d	I	PW
24	TRM 306.0	-	12.0 ^d	C	PW, SW
25	TRM 259.6	-	34.4 ^d	I	PW
26	TRM 274.9	-	19.1 ^d	I	PW
28	TRM 293.5	-	0.5 ^d	I	SW
34	Farm Be	NW	28.8	C	M
70	TRM 259.8	-	34.2 ^d	I	PW
71	TRM 286.5	-	7.5 ^d	I	PW
72	TRM 305	-	11.0 ^d	C	SS
73	TRM 293	-	1.0 ^d	I	SS
74	TRM 279.5	-	14.5 ^d	I	SS
	Wheeler Reservoir (TRM 275-349)			I/C	F
	Guntersville Reservoir (TRM 349-424)			C	F

^a See Figures 9.1, 9.2, and 9.3

^b Sample codes:

AP = Air particulate filter	S = Soil	SS = Shoreline Sediment
CF = Charcoal Filter	SW = Surface Water	M = Milk
F = Fish	V = Vegetation	PW = Public Water
W = Well Water		

^c TRM = Tennessee River Mile

^d Miles from plant discharge (TRM 294)

Table 9.3
THERMOLUMINESCENT DOSIMETRY LOCATIONS

<u>Map Location Number</u>	<u>Station</u>	<u>Sector</u>	<u>Approximate Distance (Miles)</u>	<u>Onsite (On)^a or Offsite (Off)</u>
1	NW-3	NW	13.8	Off
2	NE-3	NE	10.9	Off
3	SSE-2	SSE	7.5	Off
5	W-3	W	31.3	Off
6	E-3	E	24.2	Off
7	N-1	N	1.0	On
8	NNE-1	NNE	0.9	On
9	ENE-1	ENE	0.9	On
10	NNW-2	NNW	1.7	On
38	N-2	N	5.0	Off
39	NNE-2	NNE	0.7	On
40	NNE-3	NNE	5.2	Off
41	NE-1	NE	0.8	On
42	NE-2	NE	5.0	Off
43	ENE-2	ENE	6.2	Off
44	E-1	E	0.8	On
45	E-2	E	5.2	Off
46	ESE-1	ESE	0.9	On
47	ESE-2	ESE	3.0	Off
48	SE-1	SE	0.5	On
49	SE-2	SE	5.4	Off
50	SSE-1	SSE	5.1	Off
51	S-1	S	3.1	Off
52	S-2	S	4.8	Off
53	SSW-1	SSW	3.0	Off
54	SSW-2	SSW	4.4	Off
55	SW-1	SW	1.9	On
56	SW-2	SW	4.7	Off
57	SW-3	SW	6.0	Off
58	WSW-1	WSW	2.7	Off
59	WSW-2	WSW	5.1	Off
60	WSW-3	WSW	10.5	Off
61	W-1	W	1.9	On
62	W-2	W	4.7	Off
63	W-4	W	32.1	Off
64	WNW-1	WNW	3.3	Off
65	WNW-2	WNW	4.4	Off
66	NW-1	NW	2.2	Off
67	NW-2	NW	5.3	Off
68	NNW-1	NNW	1.0	On
69	NNW-3	NNW	5.2	Off

^aTLDs designated onsite are those located two miles or less from the plant.
TLDs designated offsite are those located more than two miles from the plant.

Figure 9.1
RADIOLOGICAL ENVIRONMENTAL SAMPLING LOCATIONS
WITHIN 1 MILE OF THE PLANT

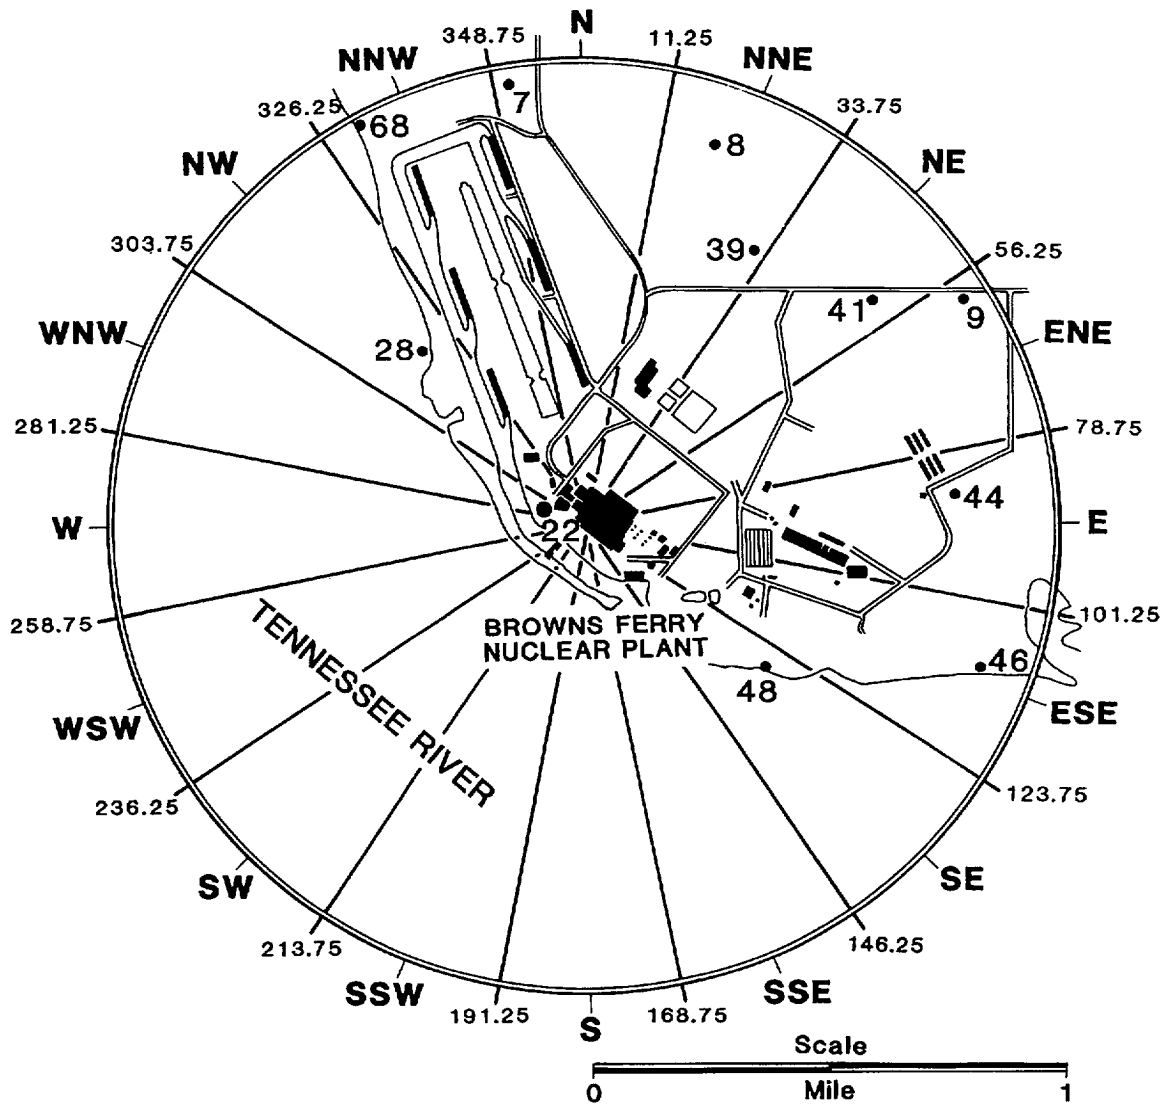


Figure 9.2
RADIOLOGICAL ENVIRONMENTAL SAMPLING LOCATIONS
FROM 1 TO 5 MILES FROM THE PLANT


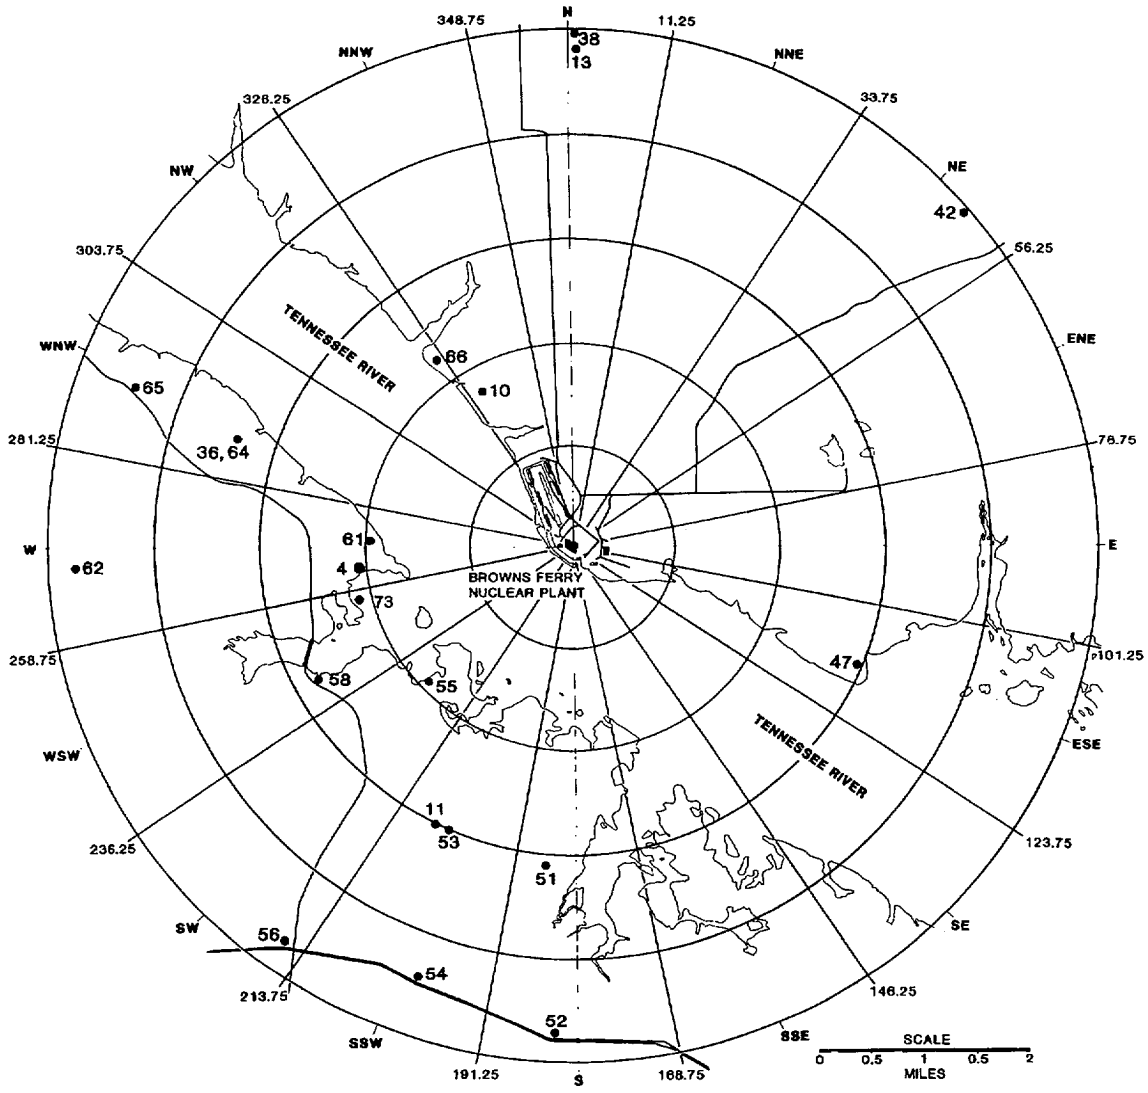


Figure 9.3
RADIOLOGICAL ENVIRONMENTAL SAMPLING LOCATIONS
GREATER THAN 5 MILES FROM THE PLANT

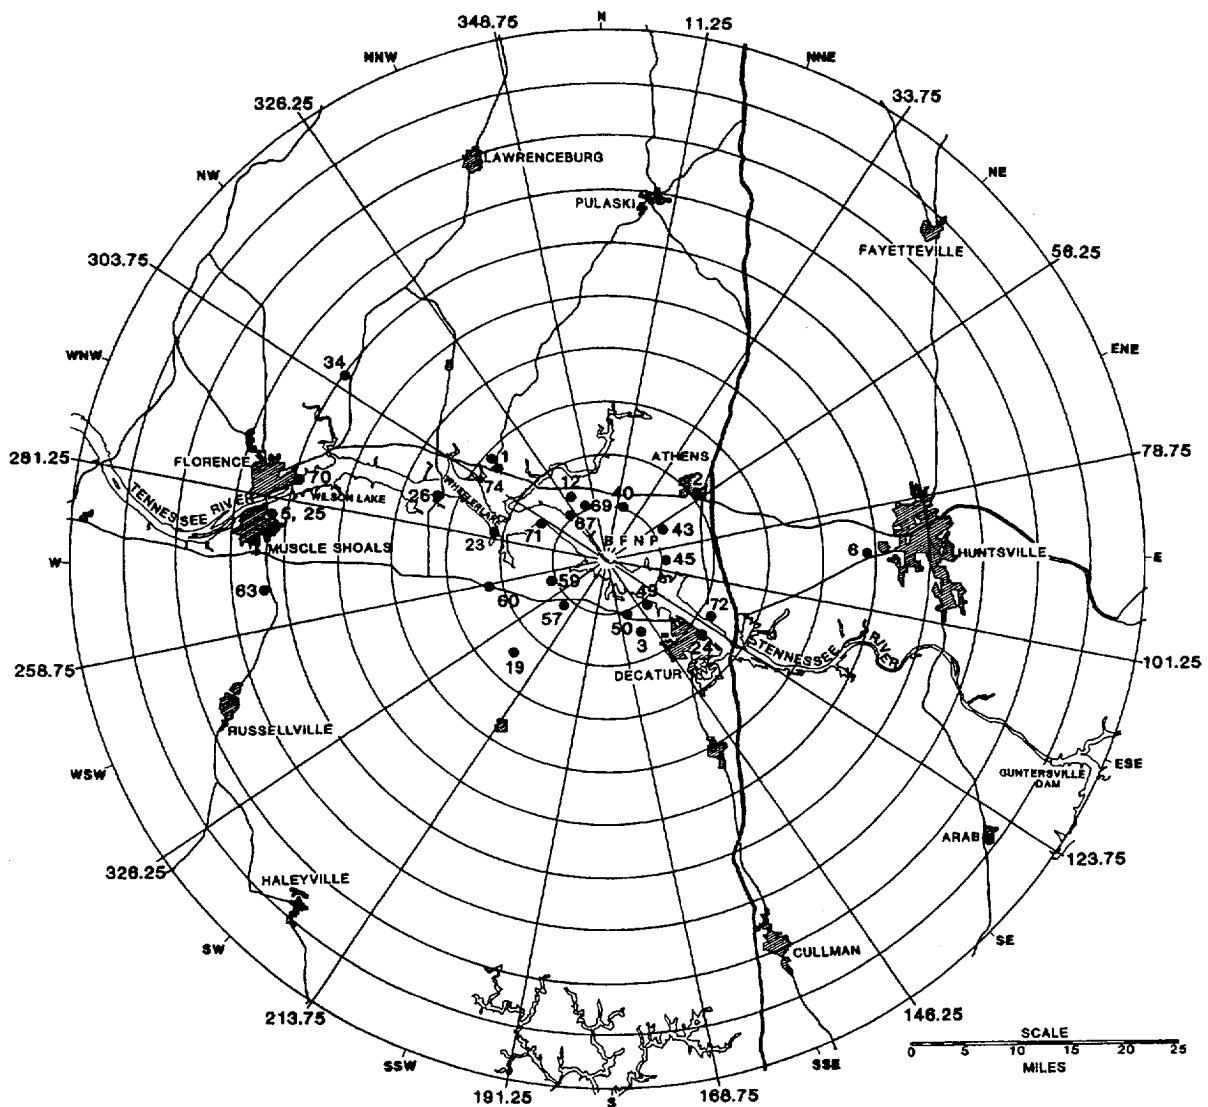

LAST PAGE