
VOGTLE ELECTRIC GENERATING PLANT RADIOLOGICAL EFFLUENT RELEASE REPORT FOR 2000



Indira Kochery

Indira Kochery

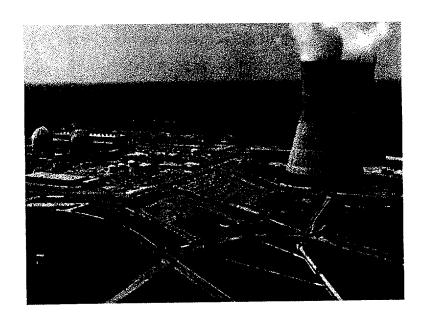

Energy to Serve Your World"

VOGTLE ELECTRIC GENERATING PLANT RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 TABLE OF CONTENTS

SECTION	TITLE	PAGE
1.0	Liquid Effluents	7
1.1	Regulatory Requirements	7
1.1.1	Concentration Limits	7
1.1.2	Dose Limits	7
1.2	Effluent Concentration Limit	7
1.3	Measurements and Approximations of Total Radioactivity	8
1.3.1	Total Radioactivity Determination	8
1.3.2	Total Error Estimation	10
1.4	Liquid Effluent Release Data	11
1.5	Radiological Impact Due to Liquid Releases	11
1.6	Liquid Effluents – Batch Releases	11
1.7	Liquid Effluents - Abnormal Releases	11
2.0	Gaseous Effluents	33
2.1	Regulatory Requirements	33
2.1.1	Dose Rate Limits	33

SECTION	TITLE	PAGE
2.1.2	Air Doses Due to Noble Gases in Gaseous Releases	33
2.1.3	Doses to a Member of the Public	33
2.2	Measurements and Approximations of Total Radioactivity	34
2.2.1	Sample Collection and Analysis	34
2.2.2	Total Quantities of Radioactivity, Dose Rates and Cumulative Doses	34
2.2.2.1	Fission and Activation Gases	34
2.2.2.2	Radioiodines, Tritium and Particulate Releases	35
2.2.2.3	Gross Alpha Release	35
2.2.3	Total Error Estimation	35
2.3	Gaseous Effluent Release Data	37
2.4	Radiological Impact Due to Gaseous Releases	38
2.5	Gaseous Effluents - Batch Releases	38
2.6	Gaseous Effluents - Abnormal Releases	38
3.0	Solid Waste	70
3.1	Regulatory Requirements	70
3.1.1	Solid Radioactive Waste System	70
3.1.2	Reporting Requirements	70
3.2	Solid Waste Data	70

SECTION	TITLE	PAGE
4.0	Doses to Members of the Public Inside the Site Boundary	75
4.1	Regulatory Requirements	75
4.2	Demonstration of Compliance	75
5.0	Total Dose from Uranium Fuel Cycle (40CFR190)	79
5.1	Regulatory Requirements	79
5.2	Demonstration of Compliance	79
6.0	Meteorological Data	79
7.0	Program Deviations	79
7.1	Inoperable Liquid or Gaseous Effluent Monitoring Instrumentation	79
7.1.1	Regulatory Requirement	79
7.1.2	Description of Deviations	79
7.2	Tanks Exceeding Curie Content Limits	80
7.2.1	Regulatory Requirements	80
7.2.2	Description of Deviations	80
8.0	Changes to the Vogtle Electric Generating Plant Offsite Dose Calculation Manual (ODCM)	80
8.1	Regulatory Requirements	80
8.2	Description of Changes	80
9.0	Major Changes to the Liquid, Gaseous or Solid Radwaste Treatment Systems	81
9.1	Regulatory Requirements	81
9.2	Description of Major Changes	81

VOGTLE ELECTRIC GENERATING PLANT RADIOACTIVE EFFLUENT RELEASE REPORT - 2000

TABLE	LIST OF TABLES	PAGE
1-1A	Liquid Effluents - Summation of All Releases Unit 1 (Quarters 1, 2, 3 and 4)	12
1-1B	Liquid Effluents - Summation of All Releases Unit 2 (Quarters 1, 2, 3 and 4)	14
1-1C	Liquid Effluents - Summation of All Releases Site (Quarters 1, 2, 3 and 4)	16
1-2A	Liquid Effluents - Unit 1 (Quarters 1, 2, 3 and 4)	18
1-2B	Liquid Effluents - Unit 2 (Quarters 1, 2, 3 and 4)	20
1-2C	Liquid Effluents – Site (Quarters 1, 2, 3 and 4)	22
1-3A	Doses to a Member of the Public Due to Liquid Releases Unit 1 (Quarters 1, 2, 3 and 4)	24
1-3B	Doses to a Member of the Public Due to Liquid Releases Unit 2 (Quarters 1, 2, 3 and 4)	26
1-4	Minimum Detectable Concentration Liquid Sample Analyses	28
1-5A	Liquid Effluents - Batch Release Summary Unit 1	29
1-5B	Liquid Effluents - Batch Release Summary Unit 2	30
1-6A	Liquid Effluents - Abnormal Release Summary - Unit 1	31

TABLE	LIST OF TABLES	PAGE
1-6B	Liquid Effluents - Abnormal Release Summary - Unit 2	32
2-1A	Gaseous Effluents - Summation of All Releases - Unit 1 (Quarters 1, 2, 3 and 4)	39
2-1B	Gaseous Effluents - Summation of All Releases - Unit 2 (Quarters 1, 2, 3 and 4)	41
2-1C	Gaseous Effluents - Summation of All Releases - Site (Quarters 1, 2, 3 and 4)	43
2-2A	Gaseous Effluents - Mixed Mode Releases Unit 1 (Quarters 1, 2, 3 and 4)	45
2-2B	Gaseous Effluents - Mixed Mode Releases Unit 2 (Quarters 1, 2, 3 and 4)	47
2-2C	Gaseous Effluents - Mixed Mode Releases Site (Quarters 1, 2, 3 and 4)	49
2-3A	Gaseous Effluents - Ground Level Releases Unit 1 (Quarters 1, 2, 3 and 4)	51
2-3B	Gaseous Effluents - Ground Level Releases Unit 2 (Quarters 1, 2, 3 and 4)	53
2-3C	Gaseous Effluents - Ground Level Releases Site (Quarters 1, 2, 3 and 4)	55
2-4A	Air Doses Due to Noble Gases in Gaseous Releases Unit 1 (Quarters 1, 2, 3 and 4)	57
2-4B	Air Doses Due to Noble Gases in Gaseous Releases Unit 2 (Quarters 1, 2, 3 and 4)	59
2-5A	Doses to a Member of the Public Due to Radioiodines, Tritium, and Particulates in Gaseous Releases Unit 1 (Quarters 1, 2, 3 and 4)	61

TABLE	LIST OF TABLES	PAGE
2-5B	Doses to a Member of the Public Due to Radioiodines, Tritium, and Particulates in Gaseous Releases	63
	Unit 2 (Quarters 1, 2, 3 and 4)	
2-6	Minimum Detectable Concentration - Gaseous Sample Analyses	65
2-7A	Gaseous Effluents - Batch Release Summary Unit 1	66
2-7B	Gaseous Effluents - Batch Release Summary Unit 2	67
2-8A	Gaseous Effluents - Abnormal Release Summary - Unit 1	68
2-8B	Gaseous Effluents - Abnormal Release Summary - Unit 2	69
3-1	Solid Waste and Irradiated Fuel Shipments	71
4-1	Doses to a Member of the Public Due to Activitie Inside the Site Boundary	s 77

1.0 Liquid Effluents

1.1 Regulatory Requirements

1.1.1 Concentration Limits

In accordance with Technical Specification 5.5.4.b, the concentration of radioactive material released in liquid effluents to UNRESTRICTED AREAS shall be limited at all times to ten times the concentrations specified in 10 CFR 20, Appendix B, Table 2, Column 2 for radionuclides other than dissolved or entrained noble gases. For dissolved or entrained noble gases, the concentration shall be limited to 1 E-04 μ Ci/ml total activity.

1.1.2 Dose Limits

The dose or dose commitment to a MEMBER OF THE PUBLIC from radioactive materials in liquid effluents released, from each unit, to UNRESTRICTED AREAS shall be limited as follows:

- a. During any calendar quarter to less than or equal to 1.5 mrems to the whole body and to less than or equal to 5 mrems to any organ, and
- b. During any calendar year to less than or equal to 3 mrems to the whole body and to less than or equal to 10 mrems to any organ.

1.2 Effluent Concentration Limit (ECL)

ECL values used for determining the allowable liquid radwaste release rates and concentrations for the principal gamma emitters, I-131, tritium, Sr-89, Sr-90 and Fe-55 are taken from 10 CFR Part 20, Appendix B, Table 2, Column 2. A tolerance factor of up to 10 is utilized to allow flexibility in establishing practical monitor set points which can accommodate effluent releases at concentrations higher than the ECL values stated in 10 CFR 20, Appendix B, Table 2, Column 2.

For dissolved or entrained noble gases in liquid radwaste, the ECL is $1E-04 \mu Ci/ml$ total activity.

For gross alpha in liquid radwaste, the ECL is 2 E-09 μ Ci/ml.

For all the above radionuclides or categories of radioactivity, the overall ECL fraction is determined in accordance with 10 CFR Part 20, Appendix B. The method utilizing the ECL fraction to determine release rates and liquid radwaste effluent radiation monitor set points is described in Subsection 1.3 of this report.

1.3 Measurements and Approximations of Total Radioactivity

1.3.1 Total Radioactivity Determination

Prior to the release of any tank containing liquid radwaste, and following the required recirculations, samples are collected and analyzed in accordance with the Offsite Dose Calculation Manual (ODCM) Table 2-3 "Radioactive Liquid Waste Sampling and Analysis Program". A sample from each tank which is planned for release is analyzed for principal gamma emitters, I-131, and dissolved and entrained noble gases by gamma spectroscopy. Monthly and quarterly composites are prepared for analysis by extracting aliquots from each sample taken from the tanks, which are released. Liquid radwaste sample analyses are performed as follows:

MEASUREMENT	FREQUENCY	METHOD
1. Gamma Isotopic	Each Batch	Gamma Spectroscopy with computerized data reduction.
Dissolved or entrained noble gases	Each Batch	Gamma Spectroscopy with computerized data reduction
3. Tritium	Monthly Composite	Distillation and liquid scintillation counting
4. Gross Alpha	Monthly Composite	Gas flow proportional counting
5. Sr-89 & Sr-90	Quarterly Composite	Chemical separation and gas flow proportional or scintillation counting
6. Fe-55	Quarterly Composite	Chemical separation and liquid scintillation counting

1.3.1 Total Radioactivity Determination cont'd

Gamma isotopic measurements are performed using germanium detectors with a resolution of 2.1 keV or lower. A liquid radwaste sample is typically counted for 5400 seconds. A peak search of the resulting gamma ray spectrum is performed by the computer system. Energy and net count data for all significant peaks are determined, and a quantitative reduction or MDC calculation is performed. This ensures that the MDC's are met for the nuclides specified in ODCM Chapter 10 (i.e., Mn-54, Fe-59, Co-58, Co-60, Zn-65, Mo-99, Cs-134, Cs-137, Ce-141 and Ce-144). The quantitative calculations, corrections for counting time, decay time, sample volume, sample geometry, detector efficiency, baseline counts, branching ratio and MDC calculations, are made based on the counts at the location in the spectrum where the peak for that radionuclide would be located, if present.

Tritium, Gross Alpha, Sr-89, Sr-90 and Fe-55 are, in some cases, analyzed offsite.

ECL fraction is determined using radionuclide concentrations of a tank planned for release, the most current results available for tritium, gross alpha, Sr-89, Sr-90 and Fe-55 and the corresponding ECL values. This ECL fraction is used, with appropriate safety factors, tolerance factors, and the minimum assured dilution stream flow to calculate maximum permissible release rates and a liquid effluent monitor setpoint. The monitor setpoint is calculated to assure that the limits of the Offsite Dose Calculation Manual (ODCM) are not exceeded.

A monitor reading in excess of the calculated setpoint results in an automatic termination of the liquid radwaste discharge. Liquid effluent discharge is also automatically terminated if the dilution stream flow rate falls below the minimum assured dilution flow rate used in the setpoint calculations and established as a setpoint on the dilution stream flow monitor.

Radionuclide concentrations, safety factors, dilution stream flow rate, and liquid effluent radiation monitor calibrations are entered into the computer and a pre-release printout is generated. If the release is not permissible, appropriate warnings will be displayed on the computer screen. If the release is permissible, it is approved by the Chemistry Department and sent to the Operations Department for approval and release. When the release is completed, the necessary data from the release (i.e., release volume, etc.) are provided by the Operations Department to the Chemistry Department. These data are input to the computer and a post-release printout is generated. The post release printout contains the actual release rates, release concentrations and quantities, actual dilution flow, and calculated doses to an individual.

Typically achieved liquid effluent sample analyses minimum detectable concentrations are reported in Table 1-4.

1.3.2 Total Error Estimation

The total or maximum error associated with the effluent measurement includes the cumulative errors resulting from the total operation of sampling and measurement. Because it may be very difficult to assign error terms for each parameter affecting the final measurement, detailed statistical evaluation of error is not suggested. The objective should be to obtain an overall estimate of the error associated with measurements of radioactive materials released in liquid effluents.

a. Fission and activation total release was calculated from sample analysis results and release point flow rates.

Sampling and statistical error	10%
Counting Equipment Calibration	10%
Tank Volumes and System Flow Rates	20%
TOTAL ERROR	40%

b. Total Tritium release was calculated from sample analysis results and release point volumes.

Sampling and statistical errors	10%
Counting equipment calibration	10%
Tank volumes and system flow rate	20%
TOTAL ERROR	40%

c. Dissolved and entrained gases were calculated from sample analysis results and release point volumes.

Sampling and statistical error	20%
Counting equipment calibration	10%
Tank volumes and system flow rate	20%
TOTAL ERROR	50%

d. Gross alpha radioactivity was calculated from sample analysis results and release point volumes.

Sampling and statistical error	10%
Counting Equipment calibration	10%
Tank volumes and system flowrates	20%
TOTAL ERROR	40%

1.3.2 Total Error Estimation cont'd

e. Volume of waste prior to dilution was calculated from level indicators on the tanks and pump discharge flow rates and times.

Level Indicator error	10%
Operator Interpretation of gauge	10%
TOTAL ERROR	20%

f. Volume of dilution water used was calculated from flow totalizers and pump discharge flow rates and times.

Flow totalizer error	10%
Operator interpretation of gauge	10%
TOTAL ERROR	20%

g. Gross alpha, Sr-89, Sr-90, Fe-55 and H-3 radioactivity has an additional error associated with sample compositing.

Compositing sample error	5%
--------------------------	----

1.4 Liquid Effluent Release Data

Regulatory Guide 1.21 Tables 2A and 2B are found in this report as Tables 1-1A, 1-1B, 1-1C, 1-2A, 1-2B and 1-2C. Data is presented on a quarterly basis as required by Regulatory Guide 1.21 for all four quarters.

1.5 Radiological Impact Due to Liquid Releases

Doses to an individual due to radioactivity in liquid effluent were calculated in accordance with the Offsite Dose Calculation Manual. Results are presented in Table 1-3A for Unit 1 and 1-3B for Unit 2, for all four quarters.

1.6 Liquid Effluents – Batch Releases

Batch release information for liquid effluents is presented in Table 1-5A for Unit 1 and Table 1-5B for Unit 2.

1.7 Liquid Effluents - Abnormal Releases

There were no abnormal releases for this reporting period.

TABLE 1-1A

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 Liquid Effluents - Summation of All Releases

Unit: 1

Starting: 1-Jan-2000 Ending: 30-Jun-2000

TYPE OF EFFLUENT	UNITS	QUARTER 1	QUARTER 2	EST. TOT ERROR %
A. FISSION & ACTIVATION PRODUCTS				
1. TOTAL RELEASE (NOT INCLUDING TRITIUM, GASES, ALPHA)	CURIES	1.71E-02	3.37E-02	40
2. AVERAGE DILUTED CONCENTRATION			2.26E-07	
3. PERCENT OF APPLICABLE LIMIT	*	*	*	
B. TRITIUM				
1. TOTAL RELEASE	CURIES	1.59E+02	8.17E+01	40
2. AVERAGE DILUTED CONCENTRATION DURING PERIOD	uCi/ML	9.62E-04	5.49E-04	
3. PERCENT OF APPLICABLE LIMIT	8	*	*	
C. DISSOLVED AND ENTRAINED GASES				
		4.95E-04	1.31E-05	50
2. AVERAGE DILUTED CONCENTRATION DURING PERIOD	uCi/ML 2	.99E-09	8.82E-11	
3. PERCENT OF APPLICABLE LIMIT	8	*	*	
D. GROSS ALPHA RADIOACTIVITY				
1. TOTAL RELEASE	CURIES	0.00E+00	1.81E-06	45
E. WASTE VOL RELEASED(PRE-DILUTION)	LITERS	4.59E+05	4.00E+05	20
F. VOLUME OF DILUTION WATER USED	LITERS	1.65E+08	1.48E+08	20

^{*} Applicable limits are expressed in terms of dose. See Tables 1-3A and 1-3B of this report.

TABLE 1-1A

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 Liquid Effluents - Summation of All Releases

Unit: 1

Starting: 1-Jul-2000 Ending: 31-Dec-2000

TYPE OF EFFLUENT	UNITS	QUARTER 3	QUARTER 4	EST. TOT ERROR %
A. FISSION & ACTIVATION PRODUCTS				
1. TOTAL RELEASE (NOT INCLUDING TRITIUM, GASES, ALPHA)	CURIES	5.52E-02	3.84E-02	40
2. AVERAGE DILUTED CONCENTRATION	uCi/ML	1.09E-07	1.16E-07	
3. PERCENT OF APPLICABLE LIMIT	* 	*	*	
B. TRITIUM		·		
1. TOTAL RELEASE	CURIES	3.87E+02	1.04E+02	40
2. AVERAGE DILUTED CONCENTRATION DURING PERIOD	uCi/ML	7.61E-04	3.13E-04	
	 % 	*	*	
C. DISSOLVED AND ENTRAINED GASES				
		2.29E-04	5.66E-05	50
2. AVERAGE DILUTED CONCENTRATION DURING PERIOD	uCi/ML	4.51E-10	1.71E-10	
3. PERCENT OF APPLICABLE LIMIT	*	*	*	
D. GROSS ALPHA RADIOACTIVITY				
1. TOTAL RELEASE	CURIES	4.52E-05	4.52E-05	45
E. WASTE VOL RELEASED(PRE-DILUTION)	LITERS	1.19E+06	7.79E+05	20
F. VOLUME OF DILUTION WATER USED	LITERS	5.07E+08	3.31E+08	20

^{*} Applicable limits are expressed in terms of dose. See Tables 1-3A and 1-3B of this report.

TABLE 1-1B

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 Liquid Effluents - Summation of All Releases

Unit: 2

Starting: 1-Jan-2000 Ending: 30-Jun-2000

TYPE OF EFFLUENT	UNITS	QUARTER 1	QUARTER 2	EST. TOT ERROR %
A. FISSION & ACTIVATION PRODUCTS				
1. TOTAL RELEASE (NOT INCLUDING TRITIUM, GASES, ALPHA)	CURIES	6.11E-03	1.51E-02	40
2 AVERAGE DILUTED CONCENTRATION	uCi/ML	8.80E-08	7.10E-07	
3. PERCENT OF APPLICABLE LIMIT	& 	*	*	
B. TRITIUM				
		5.33E+01	1.41E+01	
2. AVERAGE DILUTED CONCENTRATION DURING PERIOD	uCi/ML	7.68E-04	6.62E-04	
3. PERCENT OF APPLICABLE LIMIT	8	*	*	
C. DISSOLVED AND ENTRAINED GASES				
1. TOTAL RELEASE	CURIES		0.00E+00	50
2 AMERICE DILITED CONCENTRATION		8.20E-11	0.00E+00	
3. PERCENT OF APPLICABLE LIMIT	8	*	*	
D. GROSS ALPHA RADIOACTIVITY				
1. TOTAL RELEASE	CURIES	1.12E-05	1.19E-05	45
E. WASTE VOL RELEASED(PRE-DILUTION)	LITERS	1.84E+05	5.34E+04	20
F. VOLUME OF DILUTION WATER USED	LITERS	6.92E+07	2.12E+07	20

^{*} Applicable limits are expressed in terms of dose. See Tables 1-3A and 1-3B of this report.

TABLE 1-1B

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 Liquid Effluents - Summation of All Releases

Unit: 2

Starting: 1-Jul-2000 Ending: 31-Dec-2000

TYPE OF EFFLUENT	UNITS	QUARTER 3	QUARTER 4	EST. TOT ERROR %
A. FISSION & ACTIVATION PRODUCTS				
1. TOTAL RELEASE (NOT INCLUDING TRITIUM, GASES, ALPHA)	CURIES	9.03E-03	2.13E-02	40
2. AVERAGE DILUTED CONCENTRATION		9.49E-08		
3. PERCENT OF APPLICABLE LIMIT	 % 	*	*	
B. TRITIUM				
1. TOTAL RELEASE	CURIES	4.93E+01	2.05E+01	40
2. AVERAGE DILUTED CONCENTRATION DURING PERIOD	uCi/ML	5.18E-04	2.98E-04	
3. PERCENT OF APPLICABLE LIMIT	 % 	* 	*	
C. DISSOLVED AND ENTRAINED GASES				
1. TOTAL RELEASE		6.67E-06	0.00E+00	50
2. AVERAGE DILUTED CONCENTRATION	uCi/ML	7.01E-11	0.00E+00	
3. PERCENT OF APPLICABLE LIMIT	8 	*	*	
D. GROSS ALPHA RADIOACTIVITY				
1. TOTAL RELEASE	CURIES	1.14E-12	8.70E-06	45
E. WASTE VOL RELEASED(PRE-DILUTION)	LITERS	2.40E+05	1.59E+05	20
F. VOLUME OF DILUTION WATER USED	LITERS	9.49E+07	6.86E+07	20

^{*} Applicable limits are expressed in terms of dose. See Tables 1-3A and 1-3B of this report.

TABLE 1-1C

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000

Liquid Effluents - Summation of All Releases

Unit: Site

Starting: 1-Jan-2000 Ending: 30-Jun-2000

TYPE OF EFFLUENT	UNITS	QUARTER 1	QUARTER 2	EST. TOT ERROR %
A. FISSION & ACTIVATION PRODUCTS				
1. TOTAL RELEASE (NOT INCLUDING TRITIUM, GASES, ALPHA)	CURIES	2.32E-02	4.88E-02	40
2. AVERAGE DILUTED CONCENTRATION	uCi/ML	9.90E-08	2.87E-07	
3. PERCENT OF APPLICABLE LIMIT	 8 	*	*	
B. TRITIUM				
1. TOTAL RELEASE	CURIES	2.12E+02	9.58E+01	40
2. AVERAGE DILUTED CONCENTRATION DURING PERIOD	uCi/ML	9.04E-04	5.63E-04	
3. PERCENT OF APPLICABLE LIMIT	 %	*	*	
C. DISSOLVED AND ENTRAINED GASES				
1. TOTAL RELEASE	CURIES	5.00E-04	1.31E-05	50
2. AVERAGE DILUTED CONCENTRATION DURING PERIOD	uCi/ML	2.13E-09	7.71E-11	
3. PERCENT OF APPLICABLE LIMIT	8	*	*	
D. GROSS ALPHA RADIOACTIVITY				
1. TOTAL RELEASE	CURIES	1.12E-05	1.37E-05	45
E. WASTE VOL RELEASED(PRE-DILUTION)	LITERS	6.43E+05	4.53E+05	20
F. VOLUME OF DILUTION WATER USED	LITERS	2.34E+08	1.70E+08	20

^{*} Applicable limits are expressed in terms of dose. See Tables 1-3A and 1-3B of this report.

TABLE 1-1C

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 Liquid Effluents - Summation of All Releases

Unit: Site

Starting: 1-Jul-2000

Ending: 31-Dec-2000

TYPE OF EFFLUENT	UNITS	QUARTER 3	QUARTER 4	EST. TOT ERROR %
A. FISSION & ACTIVATION PRODUCTS				
1. TOTAL RELEASE (NOT INCLUDING TRITIUM, GASES, ALPHA)	CURIES	6.42E-02	5.96E-02	40
2 AVERAGE DILUTED CONCENTRATION	uCi/ML	1.06E-07	1.49E-07	
3. PERCENT OF APPLICABLE LIMIT	 %	*	*	
B. TRITIUM				
1. TOTAL RELEASE	CURIES	4.36E+02	1.24E+02	40
2. AVERAGE DILUTED CONCENTRATION DURING PERIOD	uCi/ML	7.23E-04	3.10E-04	
3. PERCENT OF APPLICABLE LIMIT	 %	*	*	
C. DISSOLVED AND ENTRAINED GASES				
1. TOTAL RELEASE		2.35E-04	5.66E-05	50
2. AVERAGE DILUTED CONCENTRATION DURING PERIOD	uCi/ML	3.91E-10	1.41E-10	
3. PERCENT OF APPLICABLE LIMIT	¥ 	*	*	
D. GROSS ALPHA RADIOACTIVITY				
1. TOTAL RELEASE	CURIES	4.52E-05	5.39E-05	45
E. WASTE VOL RELEASED(PRE-DILUTION)				
F. VOLUME OF DILUTION WATER USED	LITERS	6.01E+08	4.00E+08	20

^{*} Applicable limits are expressed in terms of dose. See Tables 1-3A and 1-3B of this report.

TABLE 1-2A*

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 Liquid Effluents

Unit: 1

Starting: 1-Jan-2000 Ending: 30-Jun-2000

		CONTINUOU	S MODE	ВАТСН	MODE
NUCLIDE	UNIT	QUARTER 1	QUARTER 2	QUARTER 1	QUARTER 2
н-3	CURIES	0.00E+00	0.00E+00	1.59E+02	8.17E+01
FISSION & ACTIVATION PRO	ODUCTS				
AG-110M	CURIES	0.00E+00	0.00E+00	0.00E+00	2.15E-05
CO-57	CURIES	0.00E+00	0.00E+00	0.00E+00	8.66E-06
CO-58	CURIES	0.00E+00	0.00E+00	9.13E-04	4.92E-04
CO-60	CURIES	0.00E+00	0.00E+00	3.17E-03	1.19E-02
CR-51	CURIES	0.00E+00	0.00E+00	4.77E-04	2.54E-04
CS-134	CURIES	0.00E+00	0.00E+00	1.09E-04	5.89E-05
CS-137	CURIES	0.00E+00	0.00E+00	1.54E-04	1.11E-04
FE-55	CURIES	0.00E+00	0.00E+00	5.64E-03	9.19E-03
FE-59	CURIES	0.00E+00	0.00E+00	1.01E-04	0.00E+00
LA-140	CURIES	0.00E+00	0.00E+00	1.19E-05	0.00E+00
MN-54	CURIES	0.00E+00	0.00E+00	3.53E-04	7.60E-04
NB-95	CURIES	0.00E+00	0.00E+00	1.29E-04	7.18 E- 05
NB-97	CURIES	0.00E+00	0.00E+00	1.35E-05	1.03E-04
SB-124	CURIES	0.00E+00	0.00E+00	7.91E-04	1.57E-04
SB-125	CURIES	0.00E+00	0.00E+00	5.17E-03	3.65E-03
SN-113	CURIES	0.00E+00	0.00E+00	1.01E-05	0.00E+00
SR-89	CURIES	0.00E+00	0.00E+00	5.73E-05	4.36E-05
SR-90	CURIES	0.00E+00	0.00E+00	3.49E-06	1.14E-13
TE-125M	CURIES	0.00E+00	0.00E+00	0.00E+00	6.87E-03
TE-132	CURIES	0.00E+00	0.00E+00	0.00E+00	3.20E-06
ZR-95	CURIES	0.00E+00	0.00E+00	1.27E-05	1.66E-06
TOTALS	CURIES	0.00E+00	0.00E+00	1.71E-02	3.37E-02
DISSOLVED AND ENTRAINED	GASES				
XE-133	CURIES	0.00E+00	0.00E+00	 4.95E-04	9.49E-06
XE-135	CURIES	0.00E+00	0.00E+00	0.00E+00	3.63E-06
TOTALS	CURIES	0.00E+00	0.00E+00	4.95E-04	1.31E-05
G-ALPHA	CURIES	0.00E+00	0.00E+00	 0.00E+00	1.81E-06
G THITIE	1 0011120				

^{*} Zeroes in this table indicate that no radioactivity was present at detectable levels. See Table 1-4 for typical minimum detectable concentrations.

TABLE 1-2A*

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 Liquid Effluents

Unit: 1

Starting: 1-Jul-2000

Ending: 31-Dec-2000

		CONTINUOUS	MODE	BATCH	MODE	-
		QUARTER 3	OTTA DEED 4	LOUVEMED 3	ו א משתפגוווו	- I
NUCLIDE	TINU	QUARTER 3	QUARTER 4	QOARIER 3	F MILMOOT	! -
						_
н-3	CURIES	0.00E+00	0.00E+00	3.87E+02	1.04E+02	
				·		_
FISSION & ACTIVATION PRO	DUCTS					_
AG-110M	CURIES	0.00E+00	0.00E+00	5.42E-06	1.38E-04	
CO-57	CURIES	0.00E+00	0.00E+00	3.36E-05	2.22E-06	İ
CO-58	CURIES	0.00E+00	0.00E+00	1.50E-03	4.42E-03	ĺ
CO-60	CURIES	0.00E+00	0.00E+00	1.79E-02	1.33E-02	ĺ
CR-51	CURIES	0.00E+00	0.00E+00	9.40E-04	4.72E-03	ĺ
CS-134	CURIES	0.00E+00	0.00E+00	2.32E-03	6.36E-05	
CS-137	CURIES	0.00E+00	0.00E+00	2.99E-03	7.11E-05	
FE-55	CURIES	0.00E+00	0.00E+00	8.77E-03	5.90E-03	
FE-59	CURIES	0.00E+00	0.00E+00	3.01E-05	1.75E-04	ĺ
I-131	CURIES	0.00E+00	0.00E+00	2.09E-05	0.00E+00	
I-133	CURIES	0.00E+00	0.00E+00	2.49E-06	0.00E+00	ĺ
LA-140	CURIES	0.00E+00	0.00E+00	7.53E-06	0.00E+00	
MN-54	CURIES	0.00E+00	0.00E+00	1.36E-03	1.11E-03	
NB-95	CURIES	0.00E+00	0.00E+00	9.52E-05	8.94E-04	Ĺ
NB-97	CURIES	0.00E+00	0.00E+00	5.17E-05	2.39E-04	ĺ
SB-122	CURIES	0.00E+00	0.00E+00	1.12E-06	0.00E+00	ĺ
SB-124	CURIES	0.00E+00	0.00E+00	3.74E-05	0.00E+00	İ
SB-125	CURIES	0.00E+00	0.00E+00	3.19E-03	1.37E-03	ĺ
SR-89	CURIES	0.00E+00	0.00E+00	6.98E-05	4.21E-12	İ
SR-90	CURIES	0.00E+00	0.00E+00	2.65E-05	5.83E-13	İ
SR-90 SR-92	CURIES	0.00E+00	0.00E+00	2.68E-06	4.23E-05	İ
TC-99M	CURIES	0.00E+00	0.00E+00	1.80E-06	0.00E+00	Ì
TE-125M	CURIES	0.00E+00	0.00E+00	1.58E-02	5.42E-03	ĺ
ZR-95	CURIES	0.00E+00	0.00E+00	4.49E-05	4.90E-04	ĺ
		·				-
TOTALS	CURIES	0.00E+00	0.00E+00	5.52E-02	3.84E-02	
DISSOLVED AND ENTRAINED	GASES					
XE-133	CURIES	0.00E+00	0.00E+00	2.29E-04	5.42E-05	1
XE-135	CURIES	0.00E+00	0.00E+00			İ
						_
TOTALS	CURIES	0.00E+00	U.UUE+UU	2.29E-04 	5.66E-05	. -
	1 01			 	 4.52E-05	 I
G-ALPHA	CURIES	0.00E+00				

^{*} Zeroes in this table indicate that no radioactivity was present at detectable levels. See Table 1-4 for typical minimum detectable concentrations.

TABLE 1-2B*

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 Liquid Effluents

Unit: 2

Starting: 1-Jan-2000 Ending: 30-Jun-2000

		CONTINUOU	S MODE	BATCH	MODE
NUCLIDE	UNIT	QUARTER 1	QUARTER 2	QUARTER 1	QUARTER 2
н-3	CURIES	0.00E+00	0.00E+00	5.33E+01	1.41E+01
FISSION & ACTIVATION PRO	DUCTS				
AG-110M	CURIES	0.00E+00	0.00E+00	2.16E-05	2.99E-05
CE-144	CURIES	0.00E+00	0.00E+00	7.56E-05	1.67E-04
CO-57	CURIES	0.00E+00	0.00E+00	6.24E-06	1.29E-05
CO-58	CURIES	0.00E+00	0.00E+00	4.89E-04	2.49E-04
CO-60	CURIES	0.00E+00	0.00E+00	1.76E-03	6.73E-03
CR-51	CURIES	0.00E+00	0.00E+00	2.68E-04	1.68E-04
CS-134	CURIES	0.00E+00	0.00E+00	4.40E-05	0.00E+00
CS-137	CURIES	0.00E+00	0.00E+00	6.09E-05	0.00E+00
FE-55	CURIES	0.00E+00	0.00E+00	1.12E-03	3.16E-03
MN-54	CURIES	0.00E+00	0.00E+00	1.67E-04	3.05E-04
NB-95	CURIES	0.00E+00	0.00E+00	8.39E-05	7.58E-05
SB-124	CURIES	0.00E+00	0.00E+00	2.40E-04	0.00E+00
SB-125	CURIES	0.00E+00	0.00E+00	1.74E-03	6.27E-04
SR-89	CURIES	0.00E+00	0.00E+00	5.42E-06	1.92E-05
SR-90	CURIES	0.00E+00	0.00E+00	0.00E+00	8.81E-07
TE-125M	CURIES	0.00E+00	0.00E+00	0.00E+00	3.53E-03
ZR-95	CURIES	0.00E+00	0.00E+00	2.82E-05	4.64E-05
TOTALS	CURIES	0.00E+00	0.00E+00	6.11E-03	1.51E-02
DISSOLVED AND ENTRAINED	GASES				
XE-135M	CURIES	0.00E+00	0.00E+00	5.69E-06	0.00E+00
TOTALS	CURIES	0.00E+00	0.00E+00	5.69E-06	0.00E+00
G-ALPHA	CURIES	0.00E+00	0.00E+00	1.12E-05	1.19E-05

^{*} Zeroes in this table indicate that no radioactivity was present at detectable levels. See Table 1-4 for typical minimum detectable concentrations.

TABLE 1-2B*

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 Liquid Effluents

Unit: 2

Starting: 1-Jul-2000

Ending: 31-Dec-2000

		CONTINUOU	 S MODE	BATCH	MODE
NUCLIDE	UNIT	QUARTER 3	QUARTER 4	QUARTER 3	QUARTER 4
н-3	CURIES	0.00E+00	0.00E+00	4.93E+01	2.05E+01
FISSION & ACTIVATION PRO	DUCTS				
AG-110M		l 0.00E+00	 0.00E+00	1.36E-05	1.47E-05
CO-57	CURIES	0.00E+00	0.00E+00	1.54E-06	0.00E+00
CO-58	CURIES	0.00E+00	0.00E+00	8.21E-05	4.96E-04
CO-60	CURIES	0.00E+00	0.00E+00	2.47E-03	8.80E-03
CR-51	CURIES	0.00E+00	0.00E+00	4.05E-05	4.88E-04
CS-134	CURIES	0.00E+00	0.00E+00	5.53E-05	8.14E-05
CS-137	CURIES	0.00E+00	0.00E+00	8.17E-05	1.28E-04
FE-55	CURIES	0.00E+00	0.00E+00	2.31E-03	3.70E-03
I.A-140	CURIES	0.00E+00	0.00E+00	5.88E-06	0.00E+00
MN-54	CURIES	0.00E+00	0.00E+00	1.33E-04	2.67E-04
NB-95	CURIES	0.00E+00	0.00E+00	1.67E-05	7.06E-05
NB-97	CURIES	0.00E+00	0.00E+00	1.17E-05	4.41E-05
SB-124	CURIES	0.00E+00	0.00E+00	0.00E+00	1.12E-05
SB-124 SB-125	CURIES	0.00E+00	0.00E+00	2.58E-04	1.96E-03
SR-89	CURIES	0.00E+00	0.00E+00	3.41E-13	1.66E-05
SR-90	CURIES	0.00E+00	0.00E+00	7.08E-06	3.57E-06
TE-125M	CURIES	0.00E+00	0.00E+00	3.53E-03	5.14E-03
ZR-95	CURIES	0.00E+00	0.00E+00	3.88E-06	3.70E-05
TOTALS	CURIES	0.00E+00	0.00E+00	9.03E-03	2.13E-02
DISSOLVED AND ENTRAINED	GASES				
AR-41	CURIES	0.00E+00	0.00E+00	9.33E-07	
XE-133	CURIES	0.00E+00	0.00E+00	5.74E-06	0.00E+00
TOTALS	CURIES	0.00E+00	0.00E+00	6.67E-06	0.00E+00
G-ALPHA	CURIES	0.00E+00	0.00E+00	1.14E-12	8.70E-06

^{*} Zeroes in this table indicate that no radioactivity was present at detectable levels. See Table 1-4 for typical minimum detectable concentrations.

TABLE 1-2C*

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000

Liquid Effluents

Unit: Site

Starting: 1-Jan-2000 Ending: 30-Jun-2000

				1	
		CONTINUOU	S MODE	BATCH	MODE
NUCLIDE	UNIT	QUARTER 1	QUARTER 2	QUARTER 1	QUARTER 2
н-3	CURIES	0.00E+00	0.00E+00	2.12E+02	9.58E+01
FISSION & ACTIVATION PRO	DUCTS				
AG-110M	CURIES	0.00E+00	0.00E+00	2.16E-05	5.14E-05
CE-144	CURIES	0.00E+00	0.00E+00	7.56E-05	1.67E-04
CO-57	CURIES	0.00E+00	0.00E+00	6.24E-06	2.16E-05
CO-58	CURIES	0.00E+00	0.00E+00	1.40E-03	7.41E-04
CO-60	CURIES	0.00E+00	0.00E+00	4.92E-03	1.86E-02
CR-51	CURIES	0.00E+00	0.00E+00	7.45E-04	4.22E-04
CS-134	CURIES	0.00E+00	0.00E+00	1.53E-04	5.89E-05
CS-137	CURIES	0.00E+00	0.00E+00	2.14E-04	1.11E-04
FE-55	CURIES	0.00E+00	0.00E+00	6.76E-03	1.23E-02
FE-59	CURIES	0.00E+00	0.00E+00	1.01E-04	0.00E+00
LA-140	CURIES	0.00E+00	0.00E+00	1.19E-05	0.00E+00
MN-54	CURIES	0.00E+00	0.00E+00	5.20E-04	1.06E-03
NB-95	CURIES	0.00E+00	0.00E+00	2.13E-04	1.48E-04
NB-97	CURIES	0.00E+00	0.00E+00	1.35E-05	1.03E-04
SB-124	CURIES	0.00E+00	0.00E+00	1.03E-03	1.57E-04
SB-125	CURIES	0.00E+00	0.00E+00	6.91E-03	4.28E-03
SN-113	CURIES	0.00E+00	0.00E+00	1.01E-05	0.00E+00
SR-89	CURIES	0.00E+00	0.00E+00	6.27E-05	6.27E-05
SR-90	CURIES	0.00E+00	0.00E+00	3.49E-06	8.81E-07
TE-125M	CURIES	0.00E+00	0.00E+00	0.00E+00	1.04E-02
TE-132	CURIES	0.00E+00	0.00E+00	0.00E+00	3.20E-06
ZR-95	CURIES	0.00E+00	0.00E+00	4.09E-05	4.80E-05
TOTALS	CURIES	0.00E+00	0.00E+00	2.32E-02	4.88E-02
DISSOLVED AND ENTRAINED	GASES				
XE-133	CURIES	0.00E+00			9.49E-06
XE-135	CURIES			0.00E+00	
XE-135M	CURIES	0.00E+00	0.00E+00	5.69E-06	0.00E+00
TOTALS	CURIES	0.00E+00	0.00E+00	5.00E-04	1.31E-05
G-ALPHA		0.00E+00	0.00E+00	1.12E-05	1.37E-05
	•	· 	· 	· 	

^{*} Zeroes in this table indicate that no radioactivity was present at detectable levels. See Table 1-4 for typical minimum detectable concentrations.

TABLE 1-2C*

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000

Liquid Effluents

Unit: Site

Starting: 1-Jul-2000 Ending: 31-Dec-2000

		CONTINUOU	IS MODE	BATCH	MODE
NUCLIDE	UNIT	QUARTER 3	QUARTER 4	QUARTER 3	QUARTER 4
				4.36E+02	1 1 245,02
н-3	CURIES	0.00E+00	0.00E+00	4.30E+U2	1.246+02
FISSION & ACTIVATION PRO				· 	
FISSION & ACTIVATION PRO					
AG-110M	CURIES	0.00E+00	0.00E+00	1.91E-05	1.53E-04
CO-57	CURIES	0.00E+00	0.00E+00	3.51E-05	2.22E-06
CO-58	CURIES	0.00E+00	0.00E+00	1.58E-03	4.92E-03
CO-60	CURIES	0.00E+00	0.00E+00	2.04E-02	2.21E-02
CR-51	CURIES	0.00E+00	0.00E+00	9.81E-04	5.21E-03
CS-134	CURIES	0.00E+00	0.00E+00	2.37E-03	1.45E-04
CS-137	CURIES	0.00E+00	0.00E+00	3.07E-03	2.00E-04
FE-55	CURIES	0.00E+00	0.00E+00	1.11E-02	9.60E-03
FE-59	CURIES	0.00E+00	0.00E+00	3.01E-05	1.75E-04
I-131	CURIES	0.00E+00	0.00E+00	2.09E-05	0.00E+00
I-133	CURIES	0.00E+00	0.00E+00	2.49E-06	0.00E+00
LA-140	CURIES	0.00E+00	0.00E+00	1.34E-05	0.00E+00
MN-54	CURIES	0.00E+00	0.00E+00	1.49E-03	1.38E-03
NB-95	CURIES	0.00E+00	0.00E+00	1.12E-04	9.65E-04
NB-97	CURIES	0.00E+00	0.00E+00	6.34E-05	2.83E-04
SB-122	CURIES	0.00E+00	0.00E+00	1.12E-06	0.00E+00
SB-124	CURIES	0.00E+00	0.00E+00	3.74E-05	1.12E-05
SB-125	CURIES	0.00E+00	0.00E+00	3.45E-03	3.33E-03
SR-89	CURIES	0.00E+00	0.00E+00	6.98E-05	1.66E-05
SR-90	CURIES	0.00E+00	0.00E+00	3.36E-05	3.57E-06
SR-92	CURIES	0.00E+00	0.00E+00	2.68E-06	4.23E-05
TC-99M	CURIES	0.00E+00	0.00E+00	1.80E-06	0.00E+00
TE-125M	CURIES	0.00E+00	0.00E+00	1.93E-02	1.06E-02
ZR-95	CURIES	0.00E+00	0.00E+00	4.87E-05	5.27E-04
TOTALS	CURIES	0.00E+00	0.00E+00	6.42E-02	5.96E-02
DISSOLVED AND ENTRAINED	 Caerc				
DISSOURCE WIN BILLWINED					
AR-41	CURIES	0.00E+00	0.00E+00	9.33E-07	0.00E+00
XE-133	CURIES	0.00E+00	0.00E+00	2.35E-04	5.42E-05
XE-135	CURIES			0.00E+00	2.48E-06
TOTALS	CURIES	0.00E+00	0.00E+00	2.35E-04	5.66E-05
G-ALPHA	CURIES	0.00E+00	0.00E+00	4.52E-05	5.39E-05

Zeroes in this table indicate that no radioactivity was present at detectable levels. See Table 1-4 for typical minimum detectable concentrations

TABLE 1-3A

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000

DOSES TO A MEMBER OF THE PUBLIC DUE TO LIQUID RELEASES

Unit: 1

Starting: 01-Jan-2000

Ending: 30-Jun-2000

						
Organ	ODCM Limit	Units	Quarter 1	% of ODCM Limit	Quarter 2	% of ODCM Limit
Bone Liver TBody Thyroid Kidney Lung GILLI	5.0 5.0 1.5 5.0 5.0 5.0	mrem mrem mrem mrem mrem mrem mrem mrem	1.24E-03 4.37E-03 3.88E-03 2.46E-03 3.08E-03 9.80E-03 3.81E-03	2.47E-02 8.73E-02 2.58E-01 4.92E-02 6.16E-02 1.96E-01 7.63E-02	1.77E-03 4.49E-03 3.84E-03 2.32E-03 4.42E-03 9.61E-03 6.16E-03	3.55E-02 8.98E-02 2.56E-01 4.63E-02 8.83E-02 1.92E-01 1.23E-01

Organ	ODCM Limit	Units	Year to Ending Date	% of ODCM Limit	
Bone Liver TBody Thyroid Kidney Lung GILLI	10.0 10.0 3.0 10.0 10.0 10.0	mrem mrem mrem mrem mrem mrem	3.01E-03 8.85E-03 7.71E-03 4.78E-03 7.49E-03 1.94E-02 9.97E-03	3.01E-02 8.85E-02 2.57E-01 4.78E-02 7.49E-02 1.94E-01 9.97E-02	

TABLE 1-3A

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 DOSES TO A MEMBER OF THE PUBLIC DUE TO LIQUID RELEASES

Unit: 1

Starting: 01-Jul-2000

Ending: 31-Dec-2000

Cumulative Doses per Quarter

Organ	ODCM Limit	Units	Quarter 3	% of ODCM Limit	Quarter 4	% of ODCM Limit
Bone Liver TBody Thyroid Kidney Lung , GILLI	5.0 5.0 1.5 5.0 5.0 5.0	mrem mrem mrem mrem mrem mrem	3.80E-02 7.51E-02 5.82E-02 1.09E-02 3.54E-02 2.49E-02 1.84E-02	7.61E-01 1.50E+00 3.88E+00 2.18E-01 7.08E-01 4.97E-01 3.69E-01	1.30E-03 4.81E-03 4.32E-03 2.96E-03 4.60E-03 6.33E-03 6.90E-03	2.59E-02 9.63E-02 2.88E-01 5.91E-02 9.21E-02 1.27E-01 1.38E-01

Organ	ODCM Limit	Units	Year to Ending Date	% of Limit	
Bone Liver TBody Thyroid Kidney Lung GILLI	10.0 10.0 3.0 10.0 10.0 10.0	mrem mrem mrem mrem mrem mrem mrem	4.23E-02 8.88E-02 7.02E-02 1.87E-02 4.75E-02 5.06E-02 3.53E-02	4.23E-01 8.88E-01 2.34E+00 1.87E-01 4.75E-01 5.06E-01 3.53E-01	

TABLE 1-3B

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000

DOSES TO A MEMBER OF THE PUBLIC DUE TO LIQUID RELEASES

Unit: 2

Starting: 01-Jan-2000

Ending: 30-Jun-2000

Organ	ODCM Limit	Units	Quarter 1	% of ODCM Limit	Quarter 2	% of ODCM Limit
Bone Liver TBody Thyroid Kidney Lung GILLI	5.0 5.0 1.5 5.0 5.0 5.0	mrem mrem mrem mrem mrem mrem	5.04E-04 1.72E-03 1.51E-03 8.97E-04 1.17E-03 3.66E-03 1.47E-03	1.01E-02 3.45E-02 1.01E-01 1.79E-02 2.33E-02 7.32E-02 2.94E-02	3.31E-04 6.82E-04 6.37E-04 5.46E-04 1.43E-03 2.33E-03 2.66E-03	6.62E-03 1.36E-02 4.25E-02 1.09E-02 2.86E-02 4.66E-02 5.33E-02

Organ	ODCM Limit	Units	Year to Ending Date	% of ODCM Limit	
Bone Liver TBody Thyroid Kidney Lung GILLI	10.0 10.0 3.0 10.0 10.0 10.0	mrem mrem mrem mrem mrem mrem mrem	8.35E-04 2.41E-03 2.15E-03 1.44E-03 2.59E-03 5.99E-03 4.13E-03	8.35E-03 2.41E-02 7.17E-02 1.44E-02 2.59E-02 5.99E-02 4.13E-02	

TABLE 1-3B

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000

DOSES TO A MEMBER OF THE PUBLIC DUE TO LIQUID RELEASES

Unit: 2

Starting: 01-Jul-2000

Ending: 31-Dec-2000

Cumulative Doses per Quarter

Organ	ODCM Limit	Units	Quarter 3	% of ODCM Limit	Quarter 4	% of ODCM Limit
Bone Liver TBody Thyroid Kidney Lung GILLI	5.0 5.0 1.5 5.0 5.0 5.0	mrem mrem mrem mrem mrem mrem mrem	1.27E-03 3.07E-03 2.59E-03 1.33E-03 2.53E-03 2.07E-03 2.35E-03	2.55E-02 6.14E-02 1.73E-01 2.67E-02 5.06E-02 4.14E-02 4.70E-02	1.86E-03 3.21E-03 2.50E-03 5.77E-04 2.33E-03 5.35E-03 2.86E-03	3.72E-02 6.41E-02 1.67E-01 1.15E-02 4.67E-02 1.07E-01 5.73E-02

Organ	ODCM Limit	Units	Year to Ending Date	% of ODCM Limit	
Bone Liver TBody Thyroid Kidney Lung GILLI	10.0 10.0 3.0 10.0 10.0 10.0	mrem mrem mrem mrem mrem mrem	3.97E-03 8.68E-03 7.25E-03 3.35E-03 7.45E-03 1.34E-02 9.35E-03	3.97E-02 8.68E-02 2.42E-01 3.35E-02 7.45E-02 1.34E-01 9.35E-02	

TABLE 1-4

VOGTLE ELECTRIC GENERATING PLANT RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 MINIMUM DETECTABLE CONCENTRATIONS - LIQUID SAMPLE ANALYSES

JANUARY 2000 - DECEMBER 2000

The values in this table represent a priori Minimum Detectable Concentrations (MDC) that are typically achieved in laboratory analyses of liquid radwaste samples.

RADIONUCLIDE	MDC	UNITS
Mn-54	2.73E-08	μCi/ml
Fe-59	8.33E-08	μCi/ml
Co-58	3.78E-08	μCi/ml
Co-60	6.76E-08	μCi/ml
Zn-65	1.32E-07	μCi/ml
Mo-99	4.31E-07	μCi/ml
Cs-134	3.06E-08	μCi/ml
Cs-137	4.51E-08	μCi/ml
Ce-141	6.99E-08	μCi/ml
Ce-144	2.95E-07	μCi/ml
I-131	5.97E-08	μCi/ml
Xe-133	9.11E-08	μCi/ml
Xe-135	4.27E-08	μCi/ml
Fe-55	1.00E-06	μCi/ml
Sr-89	5.00E-08	μCi/ml
Sr-90	7.00E-09	μCi/ml
H-3	2.00E-06	μCi/ml
Gross Alpha	7.00E-08	μCi/ml

TABLE 1-5A

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 Liquid Effluents - Batch Release Summary

Unit: 1

Starting: 1-Jan-2000 Ending: 30-Jun-2000

NUMBER OF BATCH RELEASES	:	25	
TOTAL TIME PERIOD FOR BATCH RELEASES	:	4130.37	MINUTES
MAXIMUM TIME PERIOD FOR A BATCH RELEASE	:	319.00	MINUTES
AVERAGE TIME PERIOD FOR BATCH RELEASES	:	165.21	MINUTES
MINIMUM TIME PERIOD FOR A BATCH RELEASE	:	52.43	MINUTES

TABLE 1-5A

Vogtle Electric Generating Plant
RADIOACTIVE EFFLUENT RELEASE REPORT - 2000
Liquid Effluents - Batch Release Summary

Unit: 1

Starting: 1-Jul-2000 Ending: 31-Dec-2000

NUMBER OF BATCH RELEASES	:	59	
TOTAL TIME PERIOD FOR BATCH RELEASES	:	10298.33	MINUTES
MAXIMUM TIME PERIOD FOR A BATCH RELEASE	:	605.97	MINUTES
AVERAGE TIME PERIOD FOR BATCH RELEASES	:	174.55	MINUTES
MINIMUM TIME PERIOD FOR A BATCH RELEASE	:	5.15	MINUTES

The average flow rate of the Savannah River at Augusta for the Radioactive Effluent Release Report period was obtained from the U.S. Army Corps of Engineers Savannah District Historic Data web page http://water.sas.usace.army.mil/tdis.html.

The average flow rate for 2000 was 4232 cubic feet per sec.

TABLE 1-5B

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 Liquid Effluents - Batch Release Summary

Unit: 2

Starting: 1-Jan-2000

Ending: 30-Jun-2000

NUMBER OF BATCH RELEASES	:	8	
TOTAL TIME PERIOD FOR BATCH RELEASES	:	1395.00	MINUTES
MAXIMUM TIME PERIOD FOR A BATCH RELEASE	:	385.68	MINUTES
AVERAGE TIME PERIOD FOR BATCH RELEASES	:	174.38	MINUTES
	•	50.53	MINUTES
MINIMUM TIME PERIOD FOR A BATCH RELEASE	:	50.55	11110110

TABLE 1-5B

Vogtle Electric Generating Plant
RADIOACTIVE EFFLUENT RELEASE REPORT - 2000
Liquid Effluents - Batch Release Summary
Unit: 2

Starting: 1-Jul-2000 Ending: 31-Dec-2000

NUMBER OF BATCH RELEASES	:	24	
TOTAL TIME PERIOD FOR BATCH RELEASES	:	1831.67	MINUTES
MAXIMUM TIME PERIOD FOR A BATCH RELEASE	:	239.28	MINUTES
AVERAGE TIME PERIOD FOR BATCH RELEASES	:	76.32	MINUTES
MINIMIM TIME PERIOD FOR A BATCH RELEASE	:	8.00	MINUTES

The average flow rate of the Savannah River at Augusta for the Radioactive Effluent Release Report period was obtained from the U.S. Army Corps of Engineers Savannah District Historic Data web page http://water.sas.usace.army.mil/tdis.html. The average flow rate for 2000 was 4232 cubic feet per sec.

TABLE 1-6A

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 Liquid Effluents - Abnormal Release Summary

Unit: 1

Starting: 1-Jan-2000 Ending: 30-Jun-2000

NUMBER OF RELEASES	:	0	
TOTAL TIME FOR ALL RELEASES	:	0.00	MINUTES
MAXIMUM TIME FOR A RELEASE	:	0.00	MINUTES
AVERAGE TIME FOR A RELEASE	:	0.00	MINUTES
MINIMUM TIME FOR A RELEASE	:	0.00	MINUTES
TOTAL ACTIVITY FOR ALL RELEASES	:	0.00E+00	CURIES

TABLE 1-6A

Vogtle Electric Generating Plant
RADIOACTIVE EFFLUENT RELEASE REPORT - 2000
Liquid Effluents - Abnormal Release Summary
Unit: 1

Starting: 1-Jul-2000 Ending: 31-Dec-2000

NUMBER OF RELEASES	:	0	
TOTAL TIME FOR ALL RELEASES	:	0.00	MINUTES
MAXIMUM TIME FOR A RELEASE	:	0.00	MINUTES
AVERAGE TIME FOR A RELEASE	:	0.00	MINUTES
MINIMUM TIME FOR A RELEASE	:	0.00	MINUTES
TOTAL ACTIVITY FOR ALL RELEASES	:	0.00E+00	CURIES

TABLE 1-6B

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 Liquid Effluents - Abnormal Release Summary

Unit: 2

Starting: 1-Jan-2000 Ending: 30-Jun-2000

NUMBER OF RELEASES	:	0	
TOTAL TIME FOR ALL RELEASES	:	0.00	MINUTES
MAXIMUM TIME FOR A RELEASE	:	0.00	MINUTES
AVERAGE TIME FOR A RELEASE	:	0.00	MINUTES
MINIMUM TIME FOR A RELEASE	:	0.00	MINUTES
TOTAL ACTIVITY FOR ALL RELEASES	:	0.00E+00	CURIES

TABLE 1-6B

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 Liquid Effluents - Abnormal Release Summary

Unit: 2

Starting: 1-Jul-2000 Ending: 31-Dec-2000

NUMBER OF RELEASES	:	0	
TOTAL TIME FOR ALL RELEASES	:	0.00	MINUTES
MAXIMUM TIME FOR A RELEASE	:	0.00	MINUTES
AVERAGE TIME FOR A RELEASE	:	0.00	MINUTES
	:	0.00	MINUTES
TOTAL ACTIVITY FOR ALL RELEASES	:	0.00E+00	CURIES
TOTAL MOTEVILL TON THE THE	•		

2.0 Gaseous Effluents

2.1 Regulatory Requirements

The ODCM Specifications presented in this section are for Unit 1 and Unit 2.

2.1.1 Dose Rate Limits

The dose rate due to radioactive materials released in gaseous effluents from the site to areas at and beyond the SITE BOUNDARY shall be limited to the following:

- a. For noble gases, Less than or equal to 500 mrems/yr. to the whole body and less than or equal to 3000 mrems/yr. to the skin and,
- b. For lodine-131, for lodine-133, for tritium and for all radionuclides in particulate form with half lives greater than 8 days: Less than or equal to 1500 mrems/yr. to any organ.

2.1.2 Air Doses Due to Noble Gases in Gaseous Releases

The air dose due to noble gases released in gaseous effluents, from each unit, to areas at and beyond the SITE BOUNDARY shall be limited to the following:

- a. During any calendar quarter: Less than or equal to 5 mrads for gamma radiation and less than or equal to 10 mrads for beta radiation, and
- b. During any calendar year: Less than or equal to 10 mrads for gamma radiation and less than or equal to 20 mrads for beta radiation.

2.1.3 Doses to a Member of the Public

The dose to a MEMBER OF THE PUBLIC from Iodine-131, Iodine-133, tritium and all radionuclides in particulate form with half-lives greater than 8 days in gaseous effluents released, from each unit, to areas at and beyond the SITE BOUNDARY shall be limited to the following.

- a. During any calendar quarter: Less than or equal to 7.5 mrems to any organ.
- b. During any calendar year: Less than or equal to 15 mrems to any organ.

2.2 Measurements and Approximations of Total Radioactivity

2.2.1 Sample Collection and Analysis

Gaseous Effluents at the Vogtle Electric Generating Plant are currently confined to five paths: plant vents (Unit 1 and Unit 2), the condenser air ejector, the steam packing exhauster systems (Unit 1 and Unit 2) and the DAW (Dry Active Waste Building).

Waste gas decay tanks are batch released through the Unit 1 plant vent. The Containment purges are released through their respective plant vents.

All of the paths with the exception of the DAW can be continuously monitored for gaseous radioactivity. Each is equipped with an integrated-type sample collection device for collecting particulates and iodines. Samples of the DAW are collected using portable monitoring equipment during periods of operation. During this reporting period, there were no continuous radioactive releases through the condenser air ejector and the steam packing exhauster system vents. There were no releases from the DAW. Batch Waste Gas Decay Tank releases are analyzed for noble gases before each release. The containment atmosphere is analyzed for noble gases prior to each release and for tritium at least on a monthly basis.

Sample analyses results and release flow rates form the basis for calculating released quantities of radionuclide specific radioactivity, dose rates associated with gaseous releases, and cumulative doses for the current quarter and year.

With each release period and batch release, radioactivity, dose rates, and cumulative doses are calculated. Cumulative dose results are tabulated, along with the percent of the ODCM limits for each release for the current quarter and year.

Typically achieved minimum detectable concentrations for gaseous effluent sample analyses are reported in Table 2-6.

2.2.2 Total Quantities of Radioactivity, Dose Rates, and Cumulative Doses

The methods for determining release quantities of radioactivity, dose rates, and cumulative doses are as follows:

2.2.2.1 Fission and Activation Gases

The released radioactivity is determined from sample analyses results collected as described above and average release flow rates over the period represented by the collected sample. Dose rates due to noble gases, radioiodines, tritium,

2.2.2.1 Fission and Activation Gases cont'd

and particulates are calculated. Calculated dose rates are compared to the dose rate limits specified in ODCM 3.1.2 for noble gases, radioiodines, tritium, and particulates. Dose rate calculation methodology is presented in the ODCM.

Beta and gamma air doses due to noble gases are calculated for the location in the unrestricted area with the potential for the highest exposure due to gaseous releases. Air doses are calculated for each release period and cumulative totals are kept for each unit for the calendar quarter and year. Cumulative air doses are compared with the dose limits specified in ODCM 3.1.3. Current percent of the ODCM limits are shown on the printout for each release period. Air dose calculation methodology is presented in the ODCM.

2.2.2.2 Radioiodines, Tritium and Particulate Releases

The released quantities of radioiodines, tritium and particulates are determined using the weekly samples and release flow rates for the two plant vent release points.

After each quarter, the particulate filters from each plant vent are combined, for strontium analysis. Strontium concentrations are input to the composite file of the computer to be used for release dose rate and individual dose calculations.

Doses to a Member of the Public due to radioiodines, tritium and particulates are calculated for the controlling receptor, which is described in Table 3-7of the ODCM. Doses are calculated for each release period, and cumulative totals are kept for each unit for the current calendar quarter and year. Cumulative doses are compared to the dose limits specified in ODCM 3.1.4.

Current percent of ODCM limits are shown in this report for each release period.

2.2.2.3 Gross Alpha Release

The gross alpha release is calculated each month by counting the particulate filters for each week for gross alpha activity. The four or five weeks' numbers are then recorded on a data sheet and the activity is summed at the end of the month. This concentration is used for release calculations.

2.2.3 Total Error Estimation

The total or maximum error associated with the effluent measurement will include the cumulative errors resulting from the total operation of sampling and measurement. Because it may be very difficult to assign error terms for each parameter affecting the final measurement, detailed statistical evaluation of error are not suggested.

2.2.3 Total Error Estimation cont'd

The objective should be to obtain an overall estimate of the error associated with measurements of radioactive materials released in liquid and gaseous effluents and solid waste.

Estimated errors are based on errors in counting equipment calibration, counting statistics, vent-flow rates, vent sample flow rates, non-steady release rates, chemical yield factors, and sample losses for such items as charcoal cartridges.

a. Fission and activation total release was calculated from sample analysis results and release point flow rates.

Sampling and statistical error in counting	10%
Counting equipment calibration	10%
Vent flow Rates	10%
Non-steady release rates	20%
TOTAL ERROR	50%

b. I-131 releases were calculated from each weekly sample:

Statistical error in counting	10%
Counting equipment calibration	10%
Vent Flow Rates	10%
Vent Sample Flow Rates	50%
Non-Steady release rates	10%
Losses from charcoal cartridges	10%
TOTAL ERROR	100%

c. Particulates with half-lives greater than 8 day releases were calculated from sample and analysis results and release point flow rates.

Statistical error at MDC concentration	10%
Counting equipment calibration	10%
Vent flow rates	10%
Vent sample flow rates	50%
Non steady release rates	10%
TOTAL ERROR	90%

d. Total tritium releases were calculated from sample analysis results and release point flow rates.

Water vapor in sample stream determination	10%
Vent flow rates	10%
Counting calibration and statistics	10%
Non-steady release rates	10%
TOTAL ERROR	40%

2.2.3 Total Error Estimation cont'd

e. Gross Alpha radioactivity was calculated from sample analysis results and release point flow rates.

Statistical error at MDC concentration	10%
Counting equipment calibration	10%
Vent flow rates	10%
Vent sample flow rates	50%
Non Steady release rates	10%
TOTAL ERROR	90%

2.3 Gaseous Effluent Release Data

Regulatory Guide 1.21 Tables 1A, 1B, and 1C are found in this report as Tables 2-1A, 2-1B, 2-1C, 2-2A, 2-2B, 2-2C, 2-3A, 2-3B, and 2-3C. Data are presented on a quarterly basis as required by Regulatory Guide 1.21.

To complete table 2-1A, and 2-1B, the total release for each of the four categories (fission and activation gases, iodines, particulates, and tritium) was divided by the number of seconds in the quarter to obtain a release rate in μ Ci/second for each category. However, the percent of the ODCM limits are not applicable because VEGP has no curie limits for gaseous releases. Applicable limits are expressed in terms of dose. Noble gases are limited as specified in ODCM 3.1.2. The other three categories (tritium, radioiodines, and particulates) are limited as a group as specified in ODCM 3.1.2.

Dose rates due to noble gas releases and due to radioiodines, tritium, and particulate releases were calculated as part of the pre-release and post-release permits. No limits were exceeded for this reporting period.

Gross alpha radioactivity is reported in Table 2-1A, and 2-1B as curies released in each quarter.

Limits for cumulative beta and gamma air doses due to noble gases are specified in ODCM 3.1.3. Cumulative air doses are presented in Table 2-4A, and 2-4B along with the percent of the ODCM limits.

Limits for cumulative doses to a Member of the Public due to radioiodines, tritium and particulates, are specified in ODCM 3.1.4. Cumulative doses to a Member of the Public are presented in Table 2-5A, and 2-5B along with percent of ODCM limits.

2.4 Radiological Impact Due to Gaseous Releases

Dose rates due to the release of noble gases were calculated for the site in accordance with ODCM 3.4.1.1. Dose rates due to radioiodines, tritium, and particulates in gaseous releases were calculated in accordance with ODCM 3.4.1.2.

Dose rates were calculated as part of pre-release and post release permits, no limits were exceeded for this reporting period.

Cumulative air doses due to noble gas releases were calculated for each unit in accordance with ODCM 3.4.2. These results are presented in Tables 2-4A and 2-4B.

Cumulative doses to a Member of the Public were calculated for each unit in accordance with ODCM 3.4.3. These results are presented in Tables 2-5A and 2-5B.

Dose rates and doses were calculated using the methodology presented in the Voqtle Electric Generating Plant Offsite Dose Calculation Manual.

2.5 Gaseous Effluents - Batch Releases

Other data pertinent to batch releases of radioactive gaseous effluent from Unit 1 and Unit 2 are listed in Table 2-7A and 2-7B.

2.6 Gaseous Effluents - Abnormal Releases

There were no unplanned or uncontrolled gaseous releases in 2000.

TABLE 2-1A

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 Gaseous Effluents - Summation of All Releases

Unit: 1

Starting: 1-Jan-2000 Ending: 30-Jun-2000

TYPE OF EFFLUENT		-		EST. TOT ERROR %
A. FISSION & ACTIVATION PRODUCTS				
1. TOTAL RELEASE	CURIES	1.28E-01	2.26E+00	50
2. AVERAGE RELEASE RATE FOR PERIOD	uCi/Sec	1.63E-02	2.88E-01	
3. PERCENT OF APPLICABLE LIMIT	*	*	*	
B. RADIOIODINES				
		3.10E-05	9.06E-07	100
2. AVERAGE RELEASE RATE FOR PERIOD	uCi/Sec	3.94E-06	1.15E-07	
3. PERCENT OF APPLICABLE LIMIT	8	*	*	
C. PARTICULATES				
1. PARTICULATES (HALF-LIVES>8 DAYS)	CURIES	1.57E-06	2.31E-06	90
2. AVERAGE RELEASE RATE FOR PERIOD	uCi/Sec	2.00E-07	2.94E-07	
3. PERCENT OF APPLICABLE LIMIT	*	*	*	
4. GROSS ALPHA RADIOACTIVITY	CURIES	0.00E+00	0.00E+00	
D. TRITIUM				
		3.12E+01	4.37E+01	40
2. AVERAGE RELEASE RATE FOR PERIOD	uCi/Sec	3.97E+00	5.56E+00	
3. PERCENT OF APPLICABLE LIMIT	* 	*	*	

^{*} Applicable limits are expressed in terms of dose. See Tables 2-4A, 2-4B, 2-5A, and 2-5B of this report.

TABLE 2-1A

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 Gaseous Effluents - Summation of All Releases

Unit: 1

TYPE OF EFFLUENT			QUARTER 4	EST. TOT ERROR %
A. FISSION & ACTIVATION PRODUCTS				
1. TOTAL RELEASE	CURIES	6.19E-01	4.79E-02	50
2. AVERAGE RELEASE RATE FOR PERIOD	uCi/Sec	7.79E-02	6.03E-03	
3. PERCENT OF APPLICABLE LIMIT	& 	*	*	
B. RADIOIODINES				
=========	CURIES	6.18E-07	0.00E+00	100
2. AVERAGE RELEASE RATE FOR PERIOD	uCi/Sec	7.77E-08	0.00E+00	
3. PERCENT OF APPLICABLE LIMIT	8	*	*	
C. PARTICULATES				
1. PARTICULATES (HALF-LIVES>8 DAYS)	CURIES	0.00E+00	7.60E-07	90
2. AVERAGE RELEASE RATE FOR PERIOD	uCi/Sec	0.00E+00	9.56E-08	
3. PERCENT OF APPLICABLE LIMIT	*	*	*	
4. GROSS ALPHA RADIOACTIVITY	CURIES	0.00E+00	0.00E+00	
D. TRITIUM				
1. TOTAL RELEASE	CURIES	3.95E+01	1.95E+01	40
2. AVERAGE RELEASE RATE FOR PERIOD	uCi/Sec	4.97E+00	2.46E+00	
3. PERCENT OF APPLICABLE LIMIT	8	*	*	

^{*} Applicable limits are expressed in terms of dose. See Tables 2-4A, 2-4B, 2-5A, and 2-5B of this report.

TABLE 2-1B

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000

Gaseous Effluents - Summation of All Releases

Unit: 2

Starting: 1-Jan-2000 Ending: 30-Jun-2000

UNITS	QUARTER 1	QUARTER 2	EST. TOT ERROR %
CURIES			50
8	*	*	
CURIES	1.72E-06	0.00E+00	100
uCi/Sec			
ሄ		*	
CURIES	1.51E-06	4.50E-07	90
uCi/Sec	1.92E-07	5.72E-08	
	*	*	
	0.00E+00	0.00E+00	
	1.37E+01	6.23E+00	40
uCi/Sec	1.74E+00	7.92E-01	
8	*	*	
	CURIES UCi/Sec % CURIES UCi/Sec % CURIES UCi/Sec CURIES UCi/Sec	CURIES 5.83E-02 uCi/Sec 7.42E-03 % * CURIES 1.72E-06 uCi/Sec 2.19E-07 % * CURIES 1.51E-06 uCi/Sec 1.92E-07 % * CURIES 0.00E+00 CURIES 1.37E+01 uCi/Sec 1.74E+00	% * * CURIES 1.72E-06 0.00E+00 uCi/Sec 2.19E-07 0.00E+00 % * * CURIES 1.51E-06 4.50E-07 uCi/Sec 1.92E-07 5.72E-08 % * * CURIES 0.00E+00 0.00E+00 CURIES 1.37E+01 6.23E+00 uCi/Sec 1.74E+00 7.92E-01

Applicable limits are expressed in terms of dose. See Tables 2-4A, 2-4B, 2-5A, and 2-5B of this report.

TABLE 2-1B

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 Gaseous Effluents - Summation of All Releases

Unit: 2

TYPE OF EFFLUENT			QUARTER 4	ERROR %
A. FISSION & ACTIVATION PRODUCTS				
	CURIES	2.67E+00	3.51E-02	50
2. AVERAGE RELEASE RATE FOR PERIOD	uCi/Sec	3.35E-01	4.41E-03	
3. PERCENT OF APPLICABLE LIMIT	* *	*	*	
B. RADIOIODINES				
			1.42E-06	100
2. AVERAGE RELEASE RATE FOR PERIOD	uCi/Sec	0.00E+00	1.79E-07	
3. PERCENT OF APPLICABLE LIMIT	8	*	*	
C. PARTICULATES				
1. PARTICULATES (HALF-LIVES>8 DAYS)	CURIES	1.12E-07	1.62E-07	90
2. AVERAGE RELEASE RATE FOR PERIOD	uCi/Sec	1.41E-08	2.04E-08	
3. PERCENT OF APPLICABLE LIMIT	*	*	*	
4. GROSS ALPHA RADIOACTIVITY	CURIES	0.00E+00	0.00E+00	
D. TRITIUM				
			5.51E+00	40
2. AVERAGE RELEASE RATE FOR PERIOD	uCi/Sec	1.42E-01	6.93E-01	
3. PERCENT OF APPLICABLE LIMIT	&	*	*	

^{*} Applicable limits are expressed in terms of dose. See Tables 2-4A, 2-4B, 2-5A, and 2-5B of this report.

TABLE 2-1C

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 Gaseous Effluents - Summation of All Releases

Unit: Site

Starting: 1-Jan-2000 Ending: 30-Jun-2000

TYPE OF EFFLUENT	UNITS	QUARTER 1	QUARTER 2	EST. TOT ERROR %
A. FISSION & ACTIVATION PRODUCTS				
1. TOTAL RELEASE	CURIES	1.87E-01	3.49E+00	50
2. AVERAGE RELEASE RATE FOR PERIOD	uCi/Sec	2.37E-02	4.44E-01	
3. PERCENT OF APPLICABLE LIMIT	*	*	*	
B. RADIOIODINES				
		3.27E-05	9.06E-07	100
2. AVERAGE RELEASE RATE FOR PERIOD	uCi/Sec	4.16E-06	1.15E-07	
3. PERCENT OF APPLICABLE LIMIT	& 	*	*	
C. PARTICULATES	·			
1. PARTICULATES (HALF-LIVES>8 DAYS)	CURIES	3.09E-06	2.76E-06	90
2. AVERAGE RELEASE RATE FOR PERIOD	uCi/Sec	3.93E-07	3.51E-07	
3. PERCENT OF APPLICABLE LIMIT	8	*	*	
4. GROSS ALPHA RADIOACTIVITY	CURIES	0.00E+00	0.00E+00	
D. TRITIUM				
			4.99E+01	
2. AVERAGE RELEASE RATE FOR PERIOD	uCi/Sec	5.71E+00	6.35E+00	
3. PERCENT OF APPLICABLE LIMIT	8	*	*	

^{*} Applicable limits are expressed in terms of dose. See Tables 2-4A, 2-4B, 2-5A, and 2-5B of this report.

TABLE 2-1C

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 Cascous Effluents - Summation of All Release

Gaseous Effluents - Summation of All Releases

Unit: Site

TYPE OF EFFLUENT	UNITS	-	QUARTER 4	ERROR %
A. FISSION & ACTIVATION PRODUCTS				
1. TOTAL RELEASE	CURIES	3.29E+00	8.30E-02	50
2. AVERAGE RELEASE RATE FOR PERIOD	uCi/Sec	4.13E-01	1.04E-02	
3. PERCENT OF APPLICABLE LIMIT	* 	*	*	
B. RADIOIODINES				
	CURIES		1.42E-06	100
2. AVERAGE RELEASE RATE FOR PERIOD			1.79E-07	
3. PERCENT OF APPLICABLE LIMIT	&	*	*	
C. PARTICULATES				
1. PARTICULATES (HALF-LIVES>8 DAYS)	CURIES	1.12E-07	9.22E-07	90
2. AVERAGE RELEASE RATE FOR PERIOD	uCi/Sec	1.41E-08	1.16E-07	
3. PERCENT OF APPLICABLE LIMIT	*	*	*	
4. GROSS ALPHA RADIOACTIVITY	CURIES	0.00E+00	0.00E+00	
D. TRITIUM				
1. TOTAL RELEASE	CURIES	4.06E+01	2.51E+01	40
2. AVERAGE RELEASE RATE FOR PERIOD	uCi/Sec	5.11E+00	3.15E+00	
3. PERCENT OF APPLICABLE LIMIT	8	*	*	

^{*} Applicable limits are expressed in terms of dose. See Tables 2-4A, 2-4B, 2-5A, and 2-5B of this report.

TABLE 2-2A*

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 Gaseous Effluents-Mixed-Mode Level Releases

Unit: 1

Starting: 1-Jan-2000 Ending: 30-Jun-2000

		CONTINUOUS MODE BATCH MODE
NUCLIDES RELEASED	UNIT	QUARTER 1 QUARTER 2 QUARTER 1 QUARTER 2
FISSION GASES		·
XE-135M AR-41 XE-135 XE-133	CURIES CURIES CURIES CURIES	0.00E+00 0.00E+00 0.00E+00 7.11E-04 0.00E+00 0.00E+00 1.07E-01 1.06E-01 0.00E+00 8.98E-01 1.46E-03 8.47E-04 0.00E+00 1.23E+00 2.02E-02 2.24E-02
TOTAL FOR PERIOD	CURIES	0.00E+00 2.13E+00 1.28E-01 1.30E-01
IODINES		
I-133 BR-82 I-131	CURIES CURIES CURIES	0.00E+00 1.51E-06 0.00E+00 0.00E+00 2.07E-05 0.00E+00 0.00E+00 0.00E+00 3.10E-05 9.06E-07 0.00E+00 0.00E+00
TOTAL FOR PERIOD	CURIES	5.17E-05 2.41E-06 0.00E+00 0.00E+00
PARTICULATES		
SR-89 BE-7 CO-60 SR-90	CURIES CURIES CURIES CURIES	2.00E-07 0.00E+00 0.00E+00 0.00E+00 1.37E-06 0.00E+00 0.00E+00 0.00E+00 0.00E+00 2.31E-06 0.00E+00 0.00E+00 0.00E+00 0.00E+00 0.00E+00 0.00E+00
TOTAL FOR PERIOD	CURIES	1.57E-06 2.31E-06 0.00E+00 0.00E+00
н-3	CURIES	3.10E+01 4.37E+01 1.85E-01 1.99E-02

Zeroes in this table indicate that no radioactivity was present at detectable levels.
 See Table 2-6 for typical minimum detectable concentrations.

TABLE 2-2A*

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 Gaseous Effluents-Mixed-Mode Level Releases

Unit: 1

		CONTINUOUS MODE	BATCH MODE
NUCLIDES RELEASED	UNIT	QUARTER 3 QUARTER 4	QUARTER 3 QUARTER 4
FISSION GASES			
AR-41 XE-135 XE-133	CURIES CURIES CURIES	0.00E+00 0.00E+00 1.81E-01 0.00E+00 1.55E-01 0.00E+00	1.00E-01 4.68E-02 1.59E-03 0.00E+00 1.78E-01 1.15E-03
TOTAL FOR PERIOD	CURIES	3.36E-01 0.00E+00	2.79E-01 4.79E-02
IODINES			
I-133 I-131	CURIES CURIES	2.31E-06 0.00E+00 6.18E-07 0.00E+00	0.00E+00 0.00E+00 0.00E+00 0.00E+00
TOTAL FOR PERIOD	CURIES	2.92E-06 0.00E+00	0.00E+00 0.00E+00
PARTICULATES			
SR-89 CO-60	CURIES CURIES	0.00E+00 2.36E-07 0.00E+00 5.24E-07	0.00E+00 0.00E+00 0.00E+00 0.00E+00
TOTAL FOR PERIOD	CURIES	0.00E+00 7.60E-07	0.00E+00 0.00E+00
н-3	CURIES	3.85E+01 1.87E+01	9.86E-01 6.53E-01

^{*} Zeroes in this table indicate that no radioactivity was present at detectable levels.

See Table 2-6 for typical minimum detectable concentrations.

TABLE 2-2B*

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 Gaseous Effluents-Mixed-Mode Level Releases

Unit: 2

Starting: 1-Jan-2000 Ending: 30-Jun-2000

		CONTINUOUS MODE	BATCH MODE
NUCLIDES RELEASED	UNIT	QUARTER 1 QUARTER 2	QUARTER 1 QUARTER 2
FISSION GASES			
AR-41 XE-135 XE-133 KR-85	CURIES CURIES CURIES CURIES	0.00E+00 0.00E+00 0.00E+00 0.00E+00 0.00E+00 0.00E+00 0.00E+00 0.00E+00	2.06E-02 2.28E-02 1.47E-03 1.55E-03 3.62E-02 1.52E-02 0.00E+00 1.19E+00
TOTAL FOR PERIOD	CURIES	0.00E+00 0.00E+00	5.83E-02 1.23E+00
IODINES			 0.00E+00 0.00E+00
I-133 I-131	CURIES CURIES	6.54E-06 0.00E+00 1.72E-06 0.00E+00	0.00E+00 0.00E+00 0.00E+00 0.00E+00
TOTAL FOR PERIOD	CURIES	8.26E-06 0.00E+00	0.00E+00 0.00E+00
PARTICULATES			
SR-89 BE-7 CO-60	CURIES CURIES CURIES	8.20E-08 0.00E+00 1.24E-06 0.00E+00 1.91E-07 4.45E-07	0.00E+00 0.00E+00 0.00E+00 0.00E+00 0.00E+00 0.00E+00
TOTAL FOR PERIOD	CURIES	1.51E-06 4.45E-07	0.00E+00 0.00E+00
н-3	CURIES	1.37E+01 6.22E+00	4.87E-03 8.56E-03

Zeroes in this table indicate that no radioactivity was present at detectable levels.
 See Table 2-6 for typical minimum detectable concentrations.

TABLE 2-2B*

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 Gaseous Effluents-Mixed-Mode Level Releases

Unit: 2

		CONTINUOUS MODE	BATCH MODE
NUCLIDES RELEASED	UNIT	QUARTER 3 QUARTER 4	QUARTER 3 QUARTER 4
FISSION GASES			
AR-41	CURIES	0.00E+00 0.00E+00	
KR-85M	CURIES	1.73E-01 0.00E+00	
XE-135 XE-133	CURIES	1.87E+00 0.00E+00 1.03E-01 0.00E+00	• • • • • • • • • • • • • • • • • • • •
KR-85	CURIES	0.00E+00 0.00E+00	
TOTAL FOR PERIOD	CURIES	2.15E+00 0.00E+00	5.19E-01 3.51E-02
IODINES			
I-133	CURIES	1.09E-06 5.57E-06	•
I-131	CURIES	0.00E+00 1.42E-06	0.00E+00 0.00E+00
TOTAL FOR PERIOD	CURIES	1.09E-06 6.99E-06	0.00E+00 0.00E+00
PARTICULATES			
SR-89	CURIES	0.00E+00 0.00E+00	
CO-58	CURIES	1.12E-07 1.62E-07	0.00E+00 0.00E+00
TOTAL FOR PERIOD	CURIES	1.12E-07 1.62E-07	0.00E+00 0.00E+00
н-3	CURIES	1.09E+00 5.49E+00	3.50E-02 1.87E-02

^{*} Zeroes in this table indicate that no radioactivity was present at detectable levels.

See Table 2-6 for typical minimum detectable concentrations.

TABLE 2-2C*

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 Gaseous Effluents-Mixed-Mode Level Releases

Unit: Site

Starting: 1-Jan-2000 Ending: 30-Jun-2000

		CONTINUOUS MODE	BATCH MODE
			LOUIS DOWN 1 LOUIS DOWN 2
NUCLIDES RELEASED	UNIT	QUARTER 1 QUARTER 2	QUARTER I QUARTER 2
FISSION GASES			
XE-135M	CURIES	0.00E+00 0.00E+00	0.00E+00 7.11E-04
AR-41	CURIES	0.00E+00 0.00E+00	1.27E-01 1.29E-01 2.93E-03 2.40E-03
XE-135	CURIES CURIES	0.00E+00 8.98E-01 0.00E+00 1.23E+00	5.64E-02 3.76E-02
XE-133 KR-85	CURIES	0.00E+00 0.00E+00	0.00E+00 1.19E+00
TOTAL FOR PERIOD	CURIES	0.00E+00 2.13E+00	1.87E-01 1.36E+00
IODINES			
I-133	CURIES	6.54E-06 1.51E-06	0.00E+00 0.00E+00
BR-82	CURIES	2.07E-05 0.00E+00	0.00E+00 0.00E+00
I-131	CURIES	3.27E-05 9.06E-07	0.00E+00 0.00E+00
TOTAL FOR PERIOD	CURIES	6.00E-05 2.41E-06	0.00E+00 0.00E+00
DADMIGUI AMEC			
PARTICULATES			
SR-89	CURIES	2.82E-07 0.00E+00	0.00E+00 0.00E+00
BE-7	CURIES	2.61E-06 0.00E+00	0.00E+00 0.00E+00
CO-60	CURIES	1.91E-07 2.75E-06	0.00E+00 0.00E+00 0.00E+00 0.00E+00
SR-90	CURIES	0.00E+00 0.00E+00	0.002+00 0.002+00
TOTAL FOR PERIOD	CURIES	3.09E-06 2.75E-06	0.00E+00 0.00E+00
н-3	CURIES	4.47E+01 4.99E+01	1.90E-01 2.85E-02

Zeroes in this table indicate that no radioactivity was present at detectable levels.
 See Table 2-6 for typical minimum detectable concentrations.

TABLE 2-2C*

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 Gaseous Effluents-Mixed-Mode Level Releases

Unit: Site

		CONTINUOUS MODE	E BATCH MODE
NUCLIDES RELEASED	 UNIT	QUARTER 3 QUARTE	R 4 QUARTER 3 QUARTER 4
FISSION GASES			
AR-41 KR-85M XE-135 XE-133 KR-85	CURIES CURIES CURIES CURIES CURIES	0.00E+00 0.00E- 1.73E-01 0.00E- 2.05E+00 0.00E- 2.58E-01 0.00E- 0.00E+00 0.00E-	+00 0.00E+00 0.00E+00 +00 2.75E-03 1.13E-04 +00 2.00E-01 1.19E-02
TOTAL FOR PERIOD	CURIES	2.48E+00 0.00E	+00 7.98E-01 8.30E-02
IODINES			
I-133 I-131	CURIES CURIES	3.40E-06 5.57E-	
TOTAL FOR PERIOD	CURIES	4.01E-06 6.99E	-06 0.00E+00 0.00E+00
PARTICULATES			
SR-89 CO-58 CO-60	CURIES CURIES CURIES	0.00E+00 2.36E 1.12E-07 1.62E 0.00E+00 5.24E	-07 0.00E+00 0.00E+00
TOTAL FOR PERIOD	CURIES	1.12E-07 9.22E	-07 0.00E+00 0.00E+00
н-3	CURIES	3.96E+01 2.42E	+01 1.02E+00 6.72E-01

^{*} Zeroes in this table indicate that no radioactivity was present at detectable levels.

See Table 2-6 for typical minimum detectable concentrations.

TABLE 2-3A*

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 Gaseous Effluents-Ground Level Releases

Unit: 1

Starting: 1-Jan-2000 Ending: 30-Jun-2000

		CONTINUOUS MODE	BATCH MODE
NUCLIDES RELEASED	UNIT	QUARTER 1 QUARTER 2	QUARTER 1 QUARTER 2
TOTAL FOR PERIOD	CURIES	G 0.00E+00 0.00E+00	0.00E+00 0.00E+00

^{*} Zeroes in this table indicate that no radioactivity was present at detectable levels. See Table 2-6 for typical minimum detectable concentrations.

TABLE 2-3A*

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 Gaseous Effluents-Ground Level Releases

Unit: 1

		CONTINUOUS MODE	BATCH MODE
NUCLIDES RELEASED	UNIT	QUARTER 3 QUARTER 4	QUARTER 3 QUARTER 4
FISSION GASES			
XE-133	CURIES	0.00E+00 0.00E+00	3.98E-03 0.00E+00
TOTAL FOR PERIOD	CURIES	0.00E+00 0.00E+00	3.98E-03 0.00E+00
н-3	CURIES	0.00E+00 0.00E+00	1.19E-02 1.49E-01

^{*} Zeroes in this table indicate that no radioactivity was present at detectable levels.

See Table 2-6 for typical minimum detectable concentrations.

TABLE 2-3B*

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 Gaseous Effluents-Ground Level Releases

Unit: 2

Starting: 1-Jan-2000 Ending: 30-Jun-2000

		CONTINUOUS MODE	BATCH MODE
NUCLIDES RELEASED	UNIT	QUARTER 1 QUARTER 2	QUARTER 1 QUARTER 2
TOTAL FOR PERIOD	CURIES	0.00E+00 0.00E+00	0.00E+00 0.00E+00

^{*} Zeroes in this table indicate that no radioactivity was present at detectable levels.

See Table 2-6 for typical minimum detectable concentrations.

TABLE 2-3B*

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 Gaseous Effluents-Ground Level Releases

Unit: 2

		CONTINUOUS MODE BATCH MODE
NUCLIDES RELEASED	UNIT	QUARTER 3 QUARTER 4 QUARTER 3 QUARTER 4
TOTAL FOR PERIOD	CURIES	0.00E+00 0.00E+00 0.00E+00 0.00E+00

^{*} Zeroes in this table indicate that no radioactivity was present at detectable levels.

See Table 2-6 for typical minimum detectable concentrations.

TABLE 2-3C*

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 Gaseous Effluents-Ground Level Releases

Unit: Site

Starting: 1-Jan-2000 Ending: 30-Jun-2000

		CONTINUOUS MODE	BATCH MODE
NUCLIDES RELEASED	UNIT	QUARTER 1 QUARTER 2	QUARTER 1 QUARTER 2
TOTAL FOR PERIOD	CURIES	0.00E+00 0.00E+00	0.00E+00 0.00E+00

^{*} Zeroes in this table indicate that no radioactivity was present at detectable levels.

See Table 2-6 for typical minimum detectable concentrations.

TABLE 2-3C*

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000

Gaseous Effluents-Ground Level Releases

Unit: Site

			CO	UTIN	JOUS MODE	- -	BAT	 rch	MODE	
NUCLIDES RELEASED		UNIT	QUART:	ER 3	QUARTER	₹ 4	QUARTER	3	QUARTER 4	
FISSION GASES										
XE-133		CURIES	0.00	Ξ+00	0.00E+	+00	3.98E-0)3	0.00E+00	
TOTAL FOR PERIOD		CURIES	0.00	3+00	0.00E+	-00	3.98E-0)3 	0.00E+00	
н-3	 	CURIES	0.00	E+00	0.00E	+00	1.19E-0	02	1.49E-01	<u> </u>

Zeroes in this table indicate that no radioactivity was present at detectable levels.
 See Table 2-6 for typical minimum detectable concentrations.

TABLE 2-4A

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 AIR DOSES DUE TO GASEOUS RELEASES

Unit: 1

Starting: 01-Jan-2000

Ending: 30-Jun-2000

Cumulative Doses per Quarter

Type of Radi- ation	ODCM Limit	Units	Quarter 1	% of ODCM Limit	Quarter 2	% of ODCM Limit
Gamma	5.0	mrad	1.47E-05	2.94E-04	4.62E-05	9.25E-04
Beta	10.0	mrad	5.49E-06	5.49E-05	5.68E-05	5.68E-04

Type of Radi- ation	ODCM Limit	Units	Year to Ending Date	% of ODCM Limit	
Gamma	10.0	mrad	6.09E-05	6.09E-04	
Beta	20.0	mrad	6.23E-05	3.11E-04	

TABLE 2-4A

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 AIR DOSES DUE TO GASEOUS RELEASES

Unit: 1

Starting: 01-Jul-2000

Ending: 31-Dec-2000

Type of Radi- ation	ODCM Limit	Units	Quarter 3	% of ODCM Limit	Quarter 4	% of ODCM Limit
Gamma	5.0	mrad	2.06E-05	4.12E-04	6.38E-06	1.28E-04
Beta		mrad	1.68E-05	1.68E-04	2.26E-06	2.26E-05

Cumulative	Doses 1	per Year			
Type of Radi- ation	ODCM Limit	Units	Year to Ending Date	% of ODCM Limit	
Gamma Beta	10.0	mrad mrad	8.79E-05 8.14E-05	8.79E-04 4.07E-04	

TABLE 2-4B

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 AIR DOSES DUE TO GASEOUS RELEASES

Unit: 2

Starting: 01-Jan-2000

Ending: 30-Jun-2000

Cumulative	Doses	per	Quarter
------------	-------	-----	---------

Type of Radi- ation	ODCM Limit	Units	Quarter 1	% of ODCM Limit	Quarter 2	% of ODCM Limit
Gamma	5.0	mrad	3.04E-06	6.08E-05	3.52E-06	7.04E-05
Beta	10.0	mrad	1.60E-06	1.60E-05	3.53E-05	3.53E-04

Type of Radi- ation	ODCM Limit	Units	Year to Ending Date	% of ODCM Limit	
Gamma Beta	10.0	mrad mrad	6.56E-06 3.69E-05	6.56E-05 1.84E-04	

TABLE 2-4B

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000

AIR DOSES DUE TO GASEOUS RELEASES

Unit: 2

Starting: 01-Jul-2000

Ending: 31-Dec-2000

Cumulativ	e Doses	-				
	ODCM			% of ODCM Limit	Quarter 4	% of ODCM Limit
Gamma Beta	5.0	mrad mrad	5.96E-05 8.90E-05	1.19E-03 8.90E-04	3.36E-06 1.33E-06	6.71E-05 1.33E-05
Cumulativ	e Doses					
Туре	ODCM	Units	Year to Ending Date			
Gamma Beta		mrad mrad	6.95E-05 1.27E-04	6.95E-04 6.36E-04		

TABLE 2-5A

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000

DOSES TO A MEMBER OF THE PUBLIC DUE TO RADIOIODINES, TRITIUM, AND PARTICULATES IN GASEOUS RELEASES

Unit: 1

Starting: 01-Jan-2000

Ending: 30-Jun-2000

Cumulative Doses per Quarter

Organ	ODCM Limit	Unit	Quarter 1	% of ODCM Limit	Quarter 2	% of ODCM Limit
Bone Liver TBody Thyroid Kidney Lung GILLI	7.5 7.5 7.5 7.5 7.5 7.5 7.5	mrem mrem mrem mrem mrem mrem mrem	1.57E-07 2.01E-04 2.01E-04 2.12E-04 2.01E-04 2.01E-04 2.01E-04	2.09E-06 2.68E-03 2.68E-03 2.82E-03 2.68E-03 2.68E-03 2.68E-03	3.15E-07 2.81E-04 2.81E-04 2.82E-04 2.81E-04 2.81E-04 2.81E-04	4.21E-06 3.75E-03 3.75E-03 3.76E-03 3.75E-03 3.75E-03

Organ	ODCM Limit	Units	Year to Ending Date	% of ODCM Limit	
Bone Liver TBody Thyroid Kidney Lung GILLI	15.0 15.0 15.0 15.0 15.0 15.0	mrem mrem mrem mrem mrem mrem	4.72E-07 4.82E-04 4.82E-04 4.93E-04 4.82E-04 4.82E-04 4.82E-04	3.15E-06 3.21E-03 3.21E-03 3.29E-03 3.21E-03 3.21E-03 3.21E-03	

TABLE 2-5A

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000

DOSES TO A MEMBER OF THE PUBLIC DUE TO RADIOIODINES, TRITIUM, AND PARTICULATES IN GASEOUS RELEASES

Unit: 1

Starting: 01-Jul-2000

Ending: 31-Dec-2000

Cumulative Doses per Quarter

Organ	ODCM Limit	Unit	Quarter 3	% of ODCM Limit	Quarter 4	% of ODCM Limit
Bone Liver TBody Thyroid Kidney Lung GILLI	7.5 7.5 7.5 7.5 7.5 7.5 7.5	mrem mrem mrem mrem mrem mrem mrem	8.57E-10 2.54E-04 2.54E-04 2.54E-04 2.54E-04 2.54E-04 2.54E-04	1.14E-08 3.39E-03 3.39E-03 3.39E-03 3.39E-03 3.39E-03 3.39E-03	1.27E-07 1.27E-04 1.27E-04 1.27E-04 1.27E-04 1.27E-04 1.27E-04	1.69E-06 1.69E-03 1.69E-03 1.69E-03 1.69E-03 1.69E-03

Organ	ODCM Limit	Units	Year to Ending Date	% of ODCM Limit	
Bone Liver TBody Thyroid Kidney Lung GILLI	15.0 15.0 15.0 15.0 15.0 15.0	mrem mrem mrem mrem mrem mrem mrem	6.00E-07 8.63E-04 8.63E-04 8.74E-04 8.63E-04 8.63E-04 8.63E-04	4.00E-06 5.75E-03 5.75E-03 5.83E-03 5.75E-03 5.75E-03 5.75E-03	

TABLE 2-5B

Vogtle Electric Generating Plant

RADIOACTIVE EFFLUENT RELEASE REPORT - 2000

DOSES TO A MEMBER OF THE PUBLIC DUE TO RADIOIODINES, TRITIUM, AND PARTICULATES IN GASEOUS RELEASES

Unit: 2

Starting: 01-Jan-2000

Ending: 30-Jun-2000

Cumulative Doses per Quarter

Organ	ODCM Limit	Unit	Quarter 1	% of ODCM Limit	Quarter 2	% of ODCM Limit
Bone	7.5	mrem mrem mrem mrem mrem mrem mrem mrem	8.19E-08	1.09E-06	6.15E-08	8.20E-07
Liver	7.5		8.82E-05	1.18E-03	4.01E-05	5.35E-04
TBody	7.5		8.82E-05	1.18E-03	4.01E-05	5.35E-04
Thyroid	7.5		8.89E-05	1.19E-03	4.01E-05	5.35E-04
Kidney	7.5		8.82E-05	1.18E-03	4.01E-05	5.35E-04
Lung	7.5		8.82E-05	1.18E-03	4.01E-05	5.35E-04
GILLI	7.5		8.82E-05	1.18E-03	4.01E-05	5.35E-04

Organ	ODCM Limit	Units	Year to Ending Date	% of ODCM Limit	
Bone	15.0	mrem	1.43E-07	9.56E-07	
Liver	15.0	mrem	1.28E-04	8.55E-04	
TBody	15.0	mrem	1.28E-04	8.55E-04	
Thyroid	15.0	mrem	1.29E-04	8.60E-04	
Kidney	15.0	mrem	1.28E-04	8.55E-04	
Lung	15.0	mrem	1.28E-04	8.55E-04	
GILLI	15.0	mrem	1.28E-04	8.55E-04	

TABLE 2-5B

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 DOSES TO A MEMBER OF THE PUBLIC DUE TO RADIOIODINES, TRITIUM,

AND PARTICULATES IN GASEOUS RELEASES

Unit: 2

Starting: 01-Jul-2000

Ending: 31-Dec-2000

Cumulative Doses per Quarter

Type of Radi- ation	ODCM Limit	Units	Quarter 3	% of ODCM Limit	Quarter 4	% of ODCM Limit
Bone Liver TBody Thyroid Kidney Lung GILLI	7.5 7.5 7.5 7.5 7.5 7.5	mrem mrem mrem mrem mrem mrem mrem	7.00E-10 7.27E-06 7.27E-06 7.28E-06 7.27E-06 7.27E-06 7.27E-06	9.34E-09 9.69E-05 9.69E-05 9.70E-05 9.69E-05 9.69E-05	2.91E-09 3.54E-05 3.54E-05 3.60E-05 3.54E-05 3.54E-05	3.88E-08 4.72E-04 4.72E-04 4.80E-04 4.72E-04 4.72E-04 4.72E-04

Type of Radi- ation	ODCM Limit	Units	Year to Ending Date	% of ODCM Limit	
Bone Liver TBody Thyroid Kidney Lung GILLI	15.0 15.0 15.0 15.0 15.0 15.0	mrem mrem mrem mrem mrem mrem	1.47E-07 1.71E-04 1.71E-04 1.72E-04 1.71E-04 1.71E-04 1.71E-04	9.80E-07 1.14E-03 1.14E-03 1.15E-03 1.14E-03 1.14E-03	

TABLE 2-6

VOGTLE ELECTRIC GENERATING PLANT RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 MINIMUM DETECTABLE CONCENTRATIONS - GASEOUS SAMPLE ANALYSES

JANUARY, 2000 THROUGH DECEMBER, 2000

The values in this table represent a priori Minimum Detectable Concentrations (MDC) that are typically achieved in laboratory analyses of gaseous radwaste samples.

RADIONUCLIDE	MDC	UNITS
Kr-87	1.82E-08	μCi/ml
Kr-88	2.53E-08	μCi/ml
Xe-133	2.05E-08	μCi/ml
Xe-133m	8.63E-08	μCi/ml
Xe-135	7.12E-08	μCi/ml
Xe-138	1.05E-07	μCi/ml
I-131	7.93E-15*	μCi/ml
Mn-54	3.94E-14*	μCi/ml
Fe-59	2.45E-14*	μCi/ml
Co-58	1.39E-14*	μCi/ml
Co-60	1.75E-14*	μCi/ml
Zn-65	2.82E-14*	μCi/ml
Mo-99	9.57E-14*	μCi/ml
Cs-134	1.12E-14*	μCi/ml
Cs-137	8.71E-15*	μCi/ml
Ce-141	8.62E-15*	μCi/ml
Ce-144	2.77E-14*	μCi/ml
Sr-89	1.00E-13	μCi/ml
Sr-90	1.00E-13	μCi/ml
H-3	9.00E-08	μCi/ml
Gross Alpha	1.00E-13	μCi/ml

^{*} Based on an estimated sample volume of 5.7E+08 ml.

TABLE 2-7A

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 Gaseous Effluents - Batch Release Summary

Unit: 1
Starting: 1-Jan-2000 Ending: 30-Jun-2000

GASEOUS RELEASES

NUMBER OF BATCH RELEASES	:	94	
TOTAL TIME PERIOD FOR BATCH RELEASES	:	7934.00	MINUTES
MAXIMUM TIME PERIOD FOR A BATCH RELEASE	:	209.00	MINUTES
AVERAGE TIME PERIOD FOR BATCH RELEASES	:	84.40	MINUTES
MINIMUM TIME FOR A BATCH RELEASE	:	10.00	MINUTES

TABLE 2-7A

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 Gaseous Effluents - Batch Release Summary

Unit: 1

Starting: 1-Jul-2000 Ending: 31-Dec-2000

GASEOUS RELEASES

NUMBER OF BATCH RELEASES	:	85	
TOTAL TIME PERIOD FOR BATCH RELEASES	:	43275.35	MINUTES
MAXIMUM TIME PERIOD FOR A BATCH RELEASE	:	8588.90	MINUTES
AVERAGE TIME PERIOD FOR BATCH RELEASES	:	509.12	MINUTES
MINIMUM TIME FOR A BATCH RELEASE	:	9.00	MINUTES

TABLE 2-7B

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 Gaseous Effluents - Batch Release Summary

Unit: 2

Starting: 1-Jan-2000 Ending: 30-Jun-2000

GASEOUS RELEASES

NUMBER OF BATCH RELEASES	:	28	
TOTAL TIME PERIOD FOR BATCH RELEASES	:	2824.00	MINUTES
MAXIMUM TIME PERIOD FOR A BATCH RELEASE	:	1187.00	MINUTES
AVERAGE TIME PERIOD FOR BATCH RELEASES		100.86	MINUTES
MINIMUM TIME FOR A BATCH RELEASE	:	9.00	MINUTES

TABLE 2-7B

Vogtle Electric Generating Plant
RADIOACTIVE EFFLUENT RELEASE REPORT - 2000
Gaseous Effluents - Batch Release Summary

Unit: 2

Starting: 1-Jul-2000 Ending: 31-Dec-2000

GASEOUS RELEASES

NUMBER OF BATCH RELEASES	:	25	
TOTAL TIME PERIOD FOR BATCH RELEASES	:	3351.00 MINUTES	
MAXIMUM TIME PERIOD FOR A BATCH RELEASE		1002.00 MINUTES	
AVERAGE TIME PERIOD FOR BATCH RELEASES		134.04 MINUTES	
MINIMUM TIME FOR A BATCH RELEASE		27.00 MINUTES	
MINIMON TIME FOR IT DITTON NEDERIO	•		

TABLE 2-8A

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 Gaseous Effluents - Abnormal Release Summary

Unit: 1

Starting: 1-Jan-2000 Ending: 30-Jun-2000

NUMBER OF RELEASES	:	0	
TOTAL TIME FOR ALL RELEASES	:	0.00	MINUTES
MAXIMUM TIME FOR A RELEASE	:	0.00	MINUTES
AVERAGE TIME FOR A RELEASE	:	0.00	MINUTES
MINIMUM TIME FOR A RELEASE	:	0.00	MINUTES
TOTAL ACTIVITY FOR ALL RELEASES	:	0.00E+00	CURIES

TABLE 2-8A

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 Gaseous Effluents - Abnormal Release Summary

Unit: 1

NUMBER OF RELEASES	:	0	
TOTAL TIME FOR ALL RELEASES	:	0.00	MINUTES
MAXIMUM TIME FOR A RELEASE	:	0.00	MINUTES
AVERAGE TIME FOR A RELEASE	:	0.00	MINUTES
MINIMUM TIME FOR A RELEASE	:	0.00	MINUTES
TOTAL ACTIVITY FOR ALL RELEASES	:	0.00E+00	CURIES

TABLE 2-8B

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 Gaseous Effluents - Abnormal Release Summary

Unit: 2

Ending : 30-Jun-2000 Starting: 1-Jan-2000

NUMBER OF RELEASES	:	0	
TOTAL TIME FOR ALL RELEASES	:	0.00	MINUTES
MAXIMUM TIME FOR A RELEASE	:	0.00	MINUTES
AVERAGE TIME FOR A RELEASE	:	0.00	MINUTES
MINIMUM TIME FOR A RELEASE	:	0.00	MINUTES
TOTAL ACTIVITY FOR ALL RELEASES	:	0.00E+00	CURIES

TABLE 2-8B

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 Gaseous Effluents - Abnormal Release Summary Unit: 2

NUMBER OF RELEASES	:	0	
TOTAL TIME FOR ALL RELEASES	:	0.00	MINUTES
MAXIMUM TIME FOR A RELEASE	:	0.00	MINUTES
AVERAGE TIME FOR A RELEASE	:	0.00	MINUTES
MINIMUM TIME FOR A RELEASE	:	0.00	MINUTES
TOTAL ACTIVITY FOR ALL RELEASES	:	0.00E+00	CURIES

3.0 Solid Waste

3.1 Regulatory Requirements

The ODCM requirements presented in this section are stated in part for Unit 1 and Unit 2.

3.1.1 Solid Radioactive Waste System

10.2.1 Process Control Program (PCP)

Radioactive wastes shall be solidified or dewatered in accordance with the PCP to meet shipping and transportation requirements during transit and disposal site requirements when received at the disposal site.

3.1.2 Reporting Requirements

12.1 PCP states in part:

The Radioactive Effluent Release Report, submitted in accordance with Technical Specification 5.6.3, shall include a summary of the quantities of solid radwaste released from the units, as outlined in Regulatory Guide 1.21.

3.2 Solid Waste Data

Regulatory Guide 1.21, Table 3 is found in this report as Table 3-1.

TABLE 3-1 Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 SOLID WASTE AND IRRADIATED FUEL SHIPMENTS Units 1 and 2

JANUARY 1, 2000 THROUGH JUNE 30, 2000

Page 1 of 4

A. SOLID WASTE SHIPPED OFFSITE FOR BURIAL OR DISPOSAL (Not Irradiated Fuel)

1.	Type of waste	Unit	6-month Period	Est. Total Error, %
a.	Spent resins, filter sludges, evaporator, bottoms, etc.	m3 Ci	None None	N/A
b.	Dry compressible waste, contaminated equip, etc.	m3 Ci	31.23 17.56	40
c.	Irradiated components, control rods, etc.	m3 Ci	NONE	N/A
đ.	Other (describe)	m3 Ci	NONE	N/A
2.	Estimate of major nuclide composition	(by type of waste)	
a.	N/A % N/A % N/A % N/A %	N/A N/A N/A N/A		

a.	N/A N/A N/A	8 8 8	N/A N/A N/A N/A
b.	N/A Ni-63	8	55.59
	Fe-55 Co-60 All others	& & &	24.74 11.36 8.304
c.	N/A	ક	N/A
	N/A N/A N/A	ሄ ቄ	N/A N/A N/A
đ.	N/A N/A	& %	N/A N/A

TABLE 3-1

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 SOLID WASTE AND IRRADIATED FUEL SHIPMENTS Units 1 and 2

JANUARY 1, 2000 THROUGH JUNE 30, 2000

Page 2 of 4

3. Solid Waste Disposition

Number of Shipments	Mode of Transportation	Destination
1 1 2	Tractor/Trailer Tractor/Cask/Trailer Tractor/Trailer	DSSI, Oak Ridge TN Studsvik, Erwin TN AERC, Oak Ridge TN
4 6 1	Tractor/Trailer Tractor/Trailer Tractor/Cask/Trailer	ATG, Richland WA Duratek, Oak Ridge, TN Duratek, Oak Ridge, TN

B. IRRADIATED FUEL SHIPMENTS (Disposition)

Number of Shipments	Mode of Transportation	Destination	
None	None	None	

ADDITIONAL INFORMATION REQUIRED BY ODCM:

Shipments to a Waste Processor

Shipment No.	<u>Waste Class</u>	<u>Type</u> Container	<u>Shipping</u> <u>Class</u>	<u>Solidification</u> <u>Agent</u>
RVRS-00-001 RVRS-00-002 RVRS-00-003 RVRS-00-004 RVRS-00-005 RVRS-00-006 RVRS-00-007 RVRS-00-009 RVRS-00-010 RVRS-00-011 RVRS-00-011 RVRS-00-013 RVRS-00-014 RVRS-00-015	A UNSTABLE A UNSTABLE A UNSTABLE A UNSTABLE A UNSTABLE A UNSTABLE A UNSTABLE A UNSTABLE A UNSTABLE A UNSTABLE A UNSTABLE A UNSTABLE A UNSTABLE A UNSTABLE A UNSTABLE A UNSTABLE A UNSTABLE A UNSTABLE A UNSTABLE A UNSTABLE	STRONG TIGHT STRONG TIGHT STRONG TIGHT STRONG TIGHT STRONG TIGHT STRONG TIGHT STRONG TIGHT STRONG TIGHT STRONG TIGHT STRONG TIGHT STRONG TIGHT STRONG TIGHT STRONG TIGHT STRONG TIGHT STRONG TIGHT STRONG TIGHT STRONG TIGHT STRONG TIGHT	LQ LSA (2) LSA (2) LSA (2) LSA (2) LSA (2) LSA (2) LSA (2) LQ LSA (2) LSA (2) LSA (2) LSA (2) LSA (2) LSA (2) LSA (2) LSA (2) LSA (2) LSA (2) LQ LSA (2) LQ LSA (2)/LQ LSA (2)/LQ	NONE NONE NONE NONE NONE NONE NONE NONE

TABLE 3-1
Vogtle Electric Generating Plant
RADIOACTIVE EFFLUENT RELEASE REPORT - 2000
SOLID WASTE AND IRRADIATED FUEL SHIPMENTS

Units 1 and 2

JULY 1, 2000 THROUGH DECEMBER 31, 2000.

Page 3 of 4

A. SOLID WASTE SHIPPED OFFSITE FOR BURIAL OR DISPOSAL (Not Irradiated Fuel)

1.	Type of waste	Unit	6-month Period	Est. Total Error, %
a.	Spent resins, filter sludges, evaporator bottoms, etc.	m3 Ci	3.905 0.9584	25
b.	Dry compressible waste, contaminated equip, etc.	m3 Ci	20.95 107.9	40
c.	Irradiated components, control rods, etc.	m3 Ci	0.4134 695.2	10
d.	Other (describe)	m3 Ci	NONE	N/A

2. Estimate of major nuclide composition (by type of waste).

a.	Ni-63 Co-60 Fe-55 All others	୫ ୫ ୫	64.59 7.610 11.06 16.74
b.	Ni-63 Fe-55 Co-60 All others	ዩ ዩ ዩ	55.59 24.74 11.36 8.304
c.	Co-60 Fe-55 Cr-51 All others	ዩ ዩ ዩ	41.41 46.59 4.830 7.170
đ.	N/A N/A N/A	୫ ୫ ୫	N/A N/A N/A

TABLE 3-1

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 SOLID WASTE AND IRRADIATED FUEL SHIPMENTS Units 1 and 2

JULY 1, 2000 THROUGH DECEMBER 31, 2000

Page 4 of 4

3. Solid Waste Disposition

Number of Shipments		Mode of Transportation	Destination		
	2	Tractor/Trailer/Cask	Chem Nuclear System		
	_				
	1	Tractor/Trailer/Cask	Studsvik, Erwin, TN		
	1	Tractor/Trailer/Cask	Duratek, Oak Ridge, TN		
	7	Tractor/Trailer	Duratek, Oak Ridge, TN		
	3	Tractor/Trailer	AERC, Oak Ridge, TN		

B. IRRADIATED FUEL SHIPMENTS (Disposition)

Number of Shipments	Mode of <u>Transportation</u>	Destination
None	None	None

ADDITIONAL INFORMATION REQUIRED BY ODCM:

Shipments Sent Directly to Disposal at Barnwell, SC

<u>Shipment</u> <u>No.</u>	<u>Waste Class</u>	<u>Type</u> Container	<u>Shipping</u> <u>Class</u>	Solidification Agent	Volume (Direct disposal only)
RWS-00-01 RWS-00-02	A STABLE C	STRONG TIGHT Type B	LSA (2) Radioactive Material. 1		137.90 ft ³ 14.60 ft ³

Shipments to a waste processor:

Shipment No.	<u>Waste Class</u>	<u>Type</u> Container	<u>Shipping</u> <u>Class</u>	Solidification Agent
RVRS-00-016	В	Туре В		NONE
RVRS-00-017	В	STRONG TIGHT	LSA (2)	NONE
RVRS-00-018	A UNSTABLE	STRONG TIGHT	LSA (2)	NONE
RVRS-00-019	A UNSTABLE	STRONG TIGHT	LQ	NONE
RVRS-00-020	A UNSTABLE	STRONG TIGHT	LQ	NONE
RVRS-00-021	A UNSTABLE	STRONG TIGHT	LSA (2)/LQ	NONE
RVRS-00-022	A UNSTABLE	STRONG TIGHT	LSA (2)	NONE
RVRS-00-023	A UNSTABLE	STRONG TIGHT	LQ	NONE
RVRS-00-024	A UNSTABLE	STRONG TIGHT	LQ	NONE
RVRS-00-025	A UNSTABLE	STRONG TIGHT	LSA (2)/LQ	NONE
RVRS-00-026	A UNSTABLE	STRONG TIGHT	LQ	NONE
RVRS-00-027	A UNSTABLE	STRONG TIGHT	LSA (2)	NONE

4.0 Doses to Members of the Public Inside the Site Boundary

4.1 Regulatory Requirements

ODCM 7.2.2.3 states in part:

"The report shall also include assessment of the radiation doses from radioactive liquid and gaseous effluents to MEMBERS OF THE PUBLIC due to their activities inside the SITE BOUNDARY during the report period; this assessment must be performed in accordance with Chapter 6. All assumptions used in making these assessments (i.e., specific activity, exposure time, and location) shall be included in the report".

4.2 Demonstration of Compliance

The location of concern within the site boundary is the Visitors Center. The activities at the Visitor Center consist of occasional attendance at meetings and/or short visits for informational purposes.

There will be no radiation dose at this location due to radioactive liquid effluents. Delineated in Table 4-1 for this location are the values of the basic data assumed in the dose assessment due to radioactive gaseous effluents. Listed in this table are distance and direction from a point midway between the center of Unit 1 and the Unit 2 reactors, the dispersion and deposition factors for any releases from the plant vent (mixed mode) and from the turbine building (ground level), and the estimated maximum occupancy factor for an individual and the assumed age group of this individual.

The source term is listed in Tables 2-2A, and 2-2B for the mixed mode releases. Similarly, it is listed in tables 2-3A and 2-3B for the ground level releases.

Demonstration of Compliance cont'd 4.2

The maximum doses in units of mrem to a MEMBER OF THE PUBLIC due to their activities inside the site boundary during the reporting period were assessed to be as follows:

VISITUR C	<u>en i en</u>	
0 10	0	

Quarter 4 Quarter 1 Quarter 2 Quarter 3 Total Body: 6.55E-09 3.29E-08 5.35**E-08** 1.19E-08 (Direct Radiation from Plume)

VISITOR CENTER

Quarter 4 Quarter 1 Quarter 2 Quarter 3 2.92E-07 4.92E-07 Maximum Organ 5.11E-07 5.98E-07 (Thyroid) Quarters 1,2,3,4 (Inhalation Ground Plane)

TABLE 4-1

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 DOSE TO A MEMBER OF THE PUBLIC

DUE TO ACTIVITIES INSIDE THE SITE BOUNDARY

Unit: Site

Starting: 01-Jan-2000

Ending: 30-Jun-2000

Page: 1

Location Distance Sector Occupancy Age Group	(kilomet	cers)	VISITOR CENT 4.47E-01 SE 4.57E-04 CHILD	ER (4.00E+00 hr/yr)		
Particu	Gas X/Q	(sec/m3) Q (sec/m3)	5.93E-06 5.58E-06 2.28E-08	•		
Particu	Gas X/Q	(sec/m3) Q (sec/m3)	7.12E-07 6.74E-07 5.77E-09			
Particu	Gas X/Q	(sec/m3) Q (sec/m3)	N/A N/A N/A			
	Units	Quarter 1	Quarter 2	Quarters 1 and 2	Year to Ending Date	
Total Body Dose	mrem	1.19E-08	3.29E-08	4.47E-08	4.47E-08	
Bone Liver TBody Thyroid Kidney Lung GI-LLI	mrem mrem	1.23E-08 5.05E-07 5.05E-07 5.11E-07 5.05E-07 5.05E-07	5.98E-07 5.98E-07 5.98E-07	4.98E-08 1.10E-06 1.11E-06 1.10E-06 1.10E-06 1.10E-06	4.98E-08 1.10E-06 1.10E-06 1.11E-06 1.10E-06 1.10E-06	

TABLE 4-1

Vogtle Electric Generating Plant RADIOACTIVE EFFLUENT RELEASE REPORT - 2000 DOSE TO A MEMBER OF THE PUBLIC

DUE TO ACTIVITIES INSIDE THE SITE BOUNDARY

Unit: Site

Starting: 01-Jul-2000

Ending: 31-Dec-2000

Page: 2

Location Distance Sector Occupancy	(kilomet Factor	,	VISITOR CENTE 4.47E-01 SE 4.57E-04		hr/yr)		
Age Group)		CHILD				
Particu	as X/Q ((sec/m3)) (sec/m3)	5.93E-06 5.58E-06 2.28E-08				
Particu	as X/Q (ses: (sec/m3)) (sec/m3)) (m-2)	7.12E-07 6.74E-07 5.77E-09				
Particu	as X/Q	(sec/m3)) (sec/m3)					
	Units	Quarter 3	Quarter 4	Quarter 3 and	s 4	Year to Ending Date	
Total Body Dose	mrem	5.35E-08	6.55E-09	6.00E-0		1.05E-07	
Bone Liver TBody Thyroid Kidney Lung GI-LLI	mrem mrem mrem	4.92E-07 4.92E-07 4.92E-07	7.46E-09 2.91E-07 2.91E-07 2.92E-07 2.91E-07 2.91E-07 2.91E-07	7.83E-0 7.83E-0 7.83E-0 7.83E-0 7.83E-0	7 7 7 7	1.89E-06 1.89E-06	

5.0 Total Dose from Uranium Fuel Cycle (40CFR190)

5.1 Regulatory Requirements

ODCM 5.1 states in part that the annual (calendar year) dose or dose commitment to any MEMBER OF THE PUBLIC due to releases of radioactivity and to radiation from uranium fuel cycle sources shall be limited to less than or equal to 25 mrems to the whole body or to any organ, except the thyroid, which shall be limited to less than or equal to 75 mrems.

5.2 Demonstration of Compliance

The requirements of 40CFR190 were met.

6.0 Meteorological Data

ODCM 7.2.2.2 states in part:

The Radioactive Effluent Release Report shall include an annual summary of hourly meteorological data collected over the previous year. This annual summary may be either in the form of an hour-by-hour listing of wind speed, wind direction, atmospheric stability, and precipitation (if measured) on magnetic tape; or in the form of joint frequency distributions of wind speed, wind direction and atmospheric stability.

In lieu of submission with the Radioactive Effluent Release Report, the licensee has the option of retaining this summary of required meteorological data on site in a file that shall be provided to the NRC upon request.

7.0 Program Deviations

7.1 Inoperable Liquid or Gaseous Effluent Monitoring Instrumentation

7.1.1 Regulatory Requirement

ODCM 7.2.2.6 states in part that the report shall include deviations from the liquid and gaseous effluent monitoring instrumentation operability requirements included in Sections 2.1.1 and 3.1.1, respectively. The report shall include an explanation as to why the inoperability of liquid or gaseous effluent monitoring instrumentation was not corrected within the specified time requirement.

7.1.2 Description of Deviations

The inoperability of liquid and gaseous effluent monitors was corrected within the specified time for this reporting period.

7.2 Tanks Exceeding Curie Content Limits

ţ.

7.2.1 Regulatory Requirements

ODCM 7.2.2.6 states in part that the report shall include a description of the events leading to liquid holdup tanks or gas storage tanks exceeding the limits of Technical Specifications 5.5.12.

7.2.2 Description of Deviations

There were no outdoor liquid hold-up tanks used for radioactive liquids during this reporting period. Limits for the gas storage tanks were not exceeded during this reporting period.

8.0 Changes to the Vogtle Electric Generating Plant Offsite Dose Calculation Manual (ODCM)

8.1 Regulatory Requirements

ODCM 7.2.2.5 states in part that changes to the ODCM shall be submitted with the Radioactive Effluent Release Report. These changes may be due to changes in the radiological environmental monitoring program sampling locations as required by ODCM 4.1.1.2.3 or changes to dose calculation locations as required by ODCM 4.1.2.2.2. Land uses and dose calculation locations within five miles of VEGP must be determined by a land use census as required by ODCM 4.1.2.

8.2 Description of Changes

There was a change made to the Vogtle Electric Generating Plant ODCM for the period January 1, 2000 through December 31, 2000. Revision 17 became effective October 2000. This change is being submitted with The Radioactive Effluent Release Report in the form of a complete legible copy of the entire ODCM in accordance with Technical Specification 5.5.1.c

The Land Use Census was conducted December 12, 2000 by Georgia Power Company Environmental Lab personnel. The results of the census for 2000 require no changes to the remp sampling locations or to the dose calculation locations.

9.0 Major Changes to Liquid, Gaseous, or Solid Radwaste Treatment Systems

9.1 Regulatory Requirements

* 1 C

ODCM 7.2.2.7 states in part:

ŧ

As required by Sections 2.1.5 and 3.1.6, licensee initiated MAJOR CHANGES TO RADIOACTIVE WASTE TREATMENT SYSTEMS (liquid and gaseous) shall be reported to the Nuclear Regulatory Commission in the Radioactive Effluent Release Report covering the period in which the change was reviewed and accepted for implementation.

Note 1: In lieu of inclusion in the Radioactive Effluents Release Report, this same information may be submitted as part of the annual FSAR update.

PCP 12.1 states in part:

Licensee major initiated changes to the solid radioactive waste treatment system shall be reported to the Nuclear Regulatory Commission in the Radioactive Effluent Release Report for the period in which the change was implemented.

9.2 Description of Major Changes

Gaseous Radwaste System

There were no major changes to the gaseous radwaste system in 2000.

Liquid Radwaste System

Major changes to the liquid, gaseous and solid radwaste facilities are those that contribute to significant changes in release; i.e., either decreases or increases in release volume or activity/dose. During the 2000 assessment period, a tubular ultrafiltration system was installed and preliminary results indicate that a decrease in released activity should be expected.

Installation of the tubular ultrafiltration system during the year 2000-assessment period may be considered a significant change in the liquid radwaste treatment system. This change is conservative as it is expected to improve system efficiency.

Solid Radwaste System

There were no major changes to the solid radwaste system in 2000.